

# Keystone Wall


## DESCRIPTION




Permacon's Keystone retaining wall, made of textured concrete, is approved by the *Ministère des Transports et de la Mobilité durable* in the Province of Quebec. Designed to meet your needs for large retaining walls, our modular system makes it possible to build strong walls up to 32 ft. (10 m) high. For designing walls with a geogrid reinforcement, please contact your Permacon sales representative.

Design and installation may vary according to project and site. Please consult your Permacon representative.


### CORNER UNIT



### COMPACT UNIT




### STRAIGHT CAPPING UNIT



All units are packaged separately. Compact units include fibreglass pins.

## LAYING PATTERN

### RUNNING BOND PATTERN

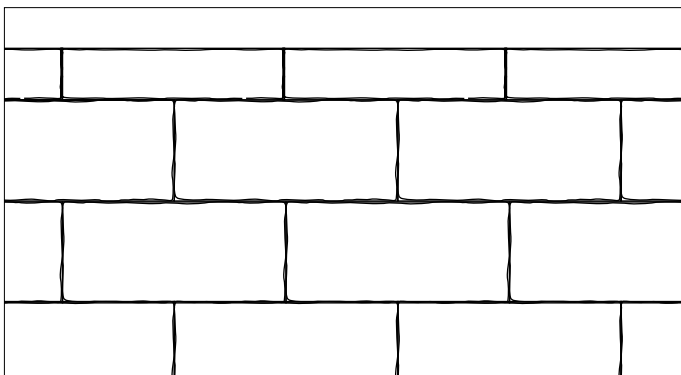

## BASIC INSTALLATION

If you have any questions about installation, please contact your Permacon representative.


### BURYING AND LAYING BED

- 1 - Excavate a space large and deep enough to create the laying bed and install the Keystone wall units to be buried
    - The laying bed must be at least the width of one unit plus 6 inches on each side, as shown in the diagram below
    - Depending on the type of installation, the minimum height of the wall to be buried is either 200 mm - 8 in., or the total height of the wall divided by 10 (whichever is greater)
  - 2 - Fill the laying bed with 0 to 20 mm - 0 to 3/4 in. compacted stone
- Refer to Step 3 in the Wall Installation section of the Installation Guide

## COMPACTED GRANULAR FOUNDATION

### INSTALLING FIRST ROW

- 1 - Lay the compact Keystone wall units side by side on the laying bed
- 2 - Ensure that all compact units are installed against each other and level to one another. There should be no holes at the sides or bottom of the units.
  - Using a mallet, **gently** tap the ends of the compact units so that they are straight with the ground and the other wall units

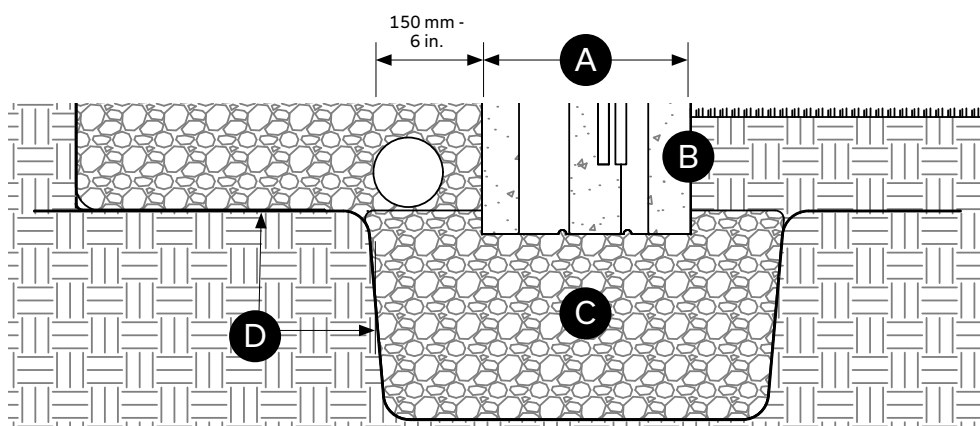

- A Wall dimensions
- B Front face
- C Compacted granular foundation:  
Depth: 150 mm - 6 in.  
Width: 610 mm - 24 in.
- D Excavation limits


**Buried depth recommendation:** For small Keystone gravity walls, a minimum of 6 inches embedment is required.

## FIBREGLASS PINS

### WALL AND PIN INSTALLATION

Insert the fibreglass pins of the compact unit into the two appropriate holes.

- Depending on the required setback, place the pins in the front pin cores closest to the unit textured face (1° setback) or in the back pin cores closest to the inner cavity (9° setback). If the holes in which the pins are inserted are interchanged from row to row, the wall will have a 4° setback.

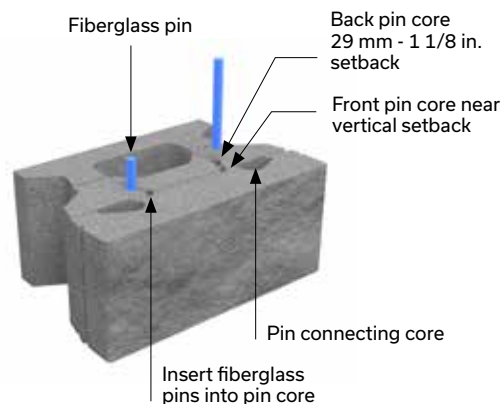


# KEYSTONE WALL - INSTALLATION


## ANCHOR PIN SYSTEM

### KEYSTONE UNIT

Straight face compact - View from above



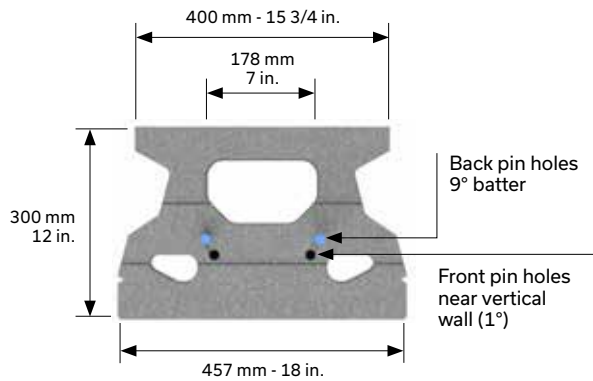


Insert connecting pin into pin holes

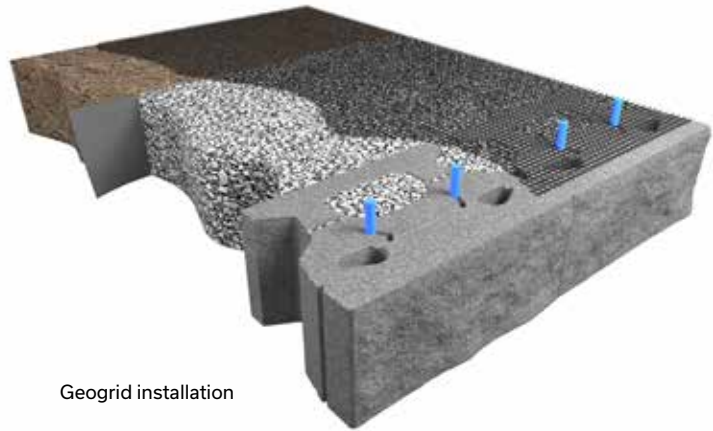

Geogrid installation

## SETBACK OPTIONS

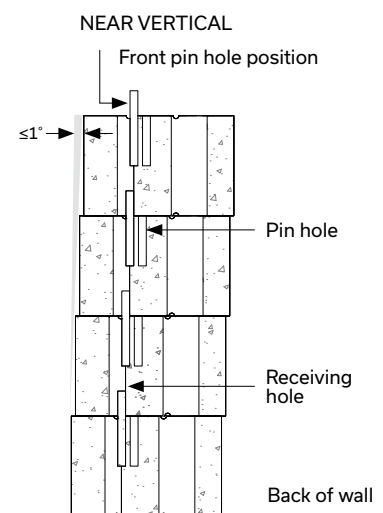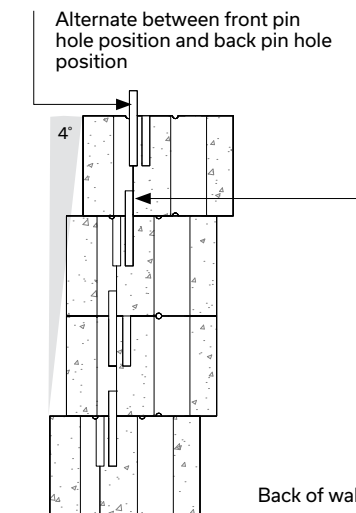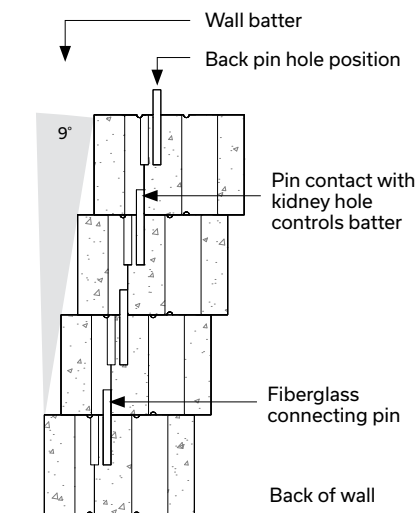


# KEYSTONE WALL - INSTALLATION

## DRAINAGE PIPE DETAILS

To ensure proper drainage and durability over the years, it is critical to install a drain behind the wall.

- 1 - Install the drainage pipe behind the first row of Keystone wall units
- 2 - Fill this area with 20 mm - 3/4 in. crushed drainage stone at least 300 mm - 12 in. wide while covering the drainage pipe

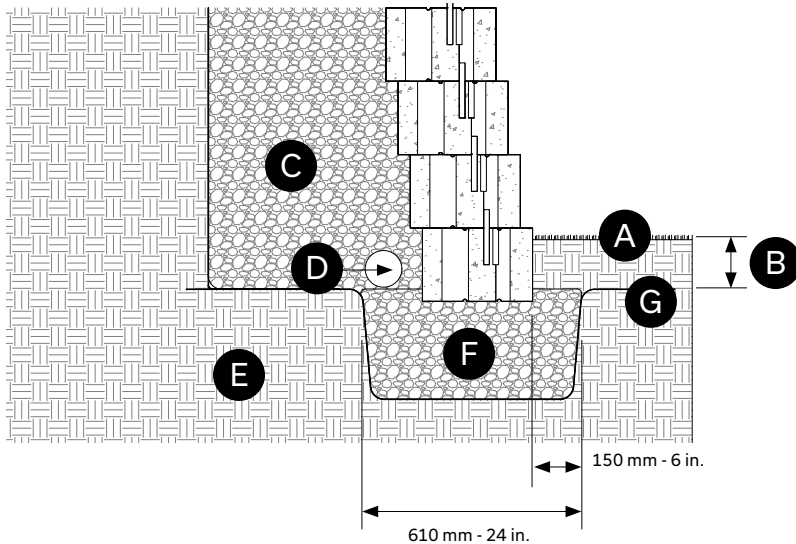


- Ⓐ Finished grade
- Ⓑ Compacted granular foundation minimum 200 mm - 8 in. or h/10
- Ⓒ Reinforced soil
- Ⓓ Perforated drain connected to services: 150 mm Ø - 6 in.
- Ⓔ Foundation soil
- Ⓕ 6 inch compacted granular foundation
- Ⓖ Geotextile

## UNIT INSTALLATION


### TOP ROWS

Once the first row has been laid on the compacted granular foundation and the drainage system installed, the remaining rows of Keystone units can be installed.

- 1 - Align the pin cores of the compact units above the fibreglass pins of the first row
- 2 - Lay the units, making sure that the pins of the lower row are in the cores of the upper unit
- 3 - Repeat steps #1 and 2 for all units in the row
- 4 - Make sure all units are installed against each other and level to one another. There should be no space in the sides or bottom of the units.
  - Using a mallet, **gently** tap the ends of the units so that they are straight with the ground and the other wall units
- 5 - Repeat steps #1 to 4 for all rows of the wall, inserting geogrids where indicated

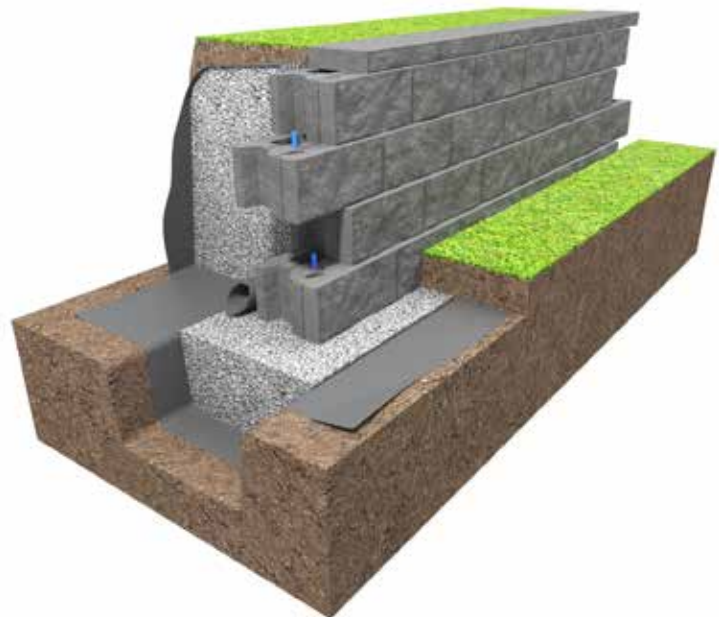


UNIT CONNECTION - CONT'D

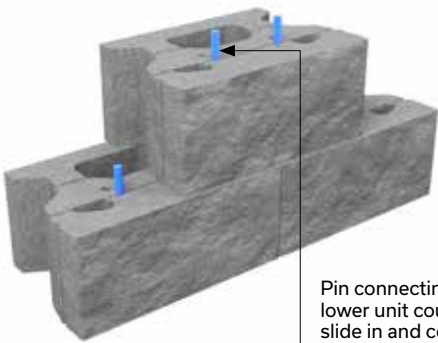


Pin connecting of upper unit course to lower unit course. Core allowing pin to slide in and complete unit connection.  
**Note:** Place two Keystone fiberglass pins in each unit


PIN CONNECTION - near vertical setback section

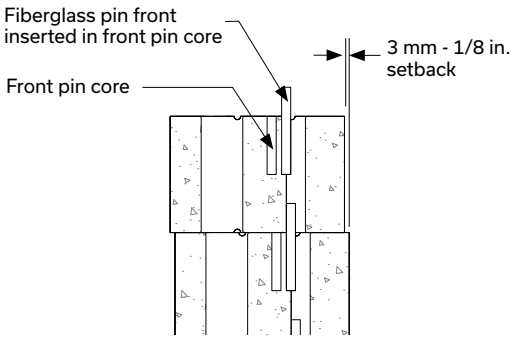

WALL UNIT TO WALL UNIT CONNECTION

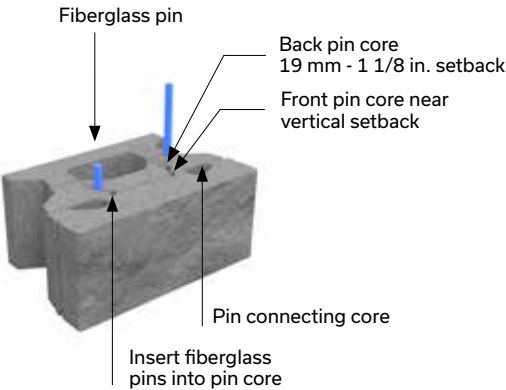

PIN CONNECTION

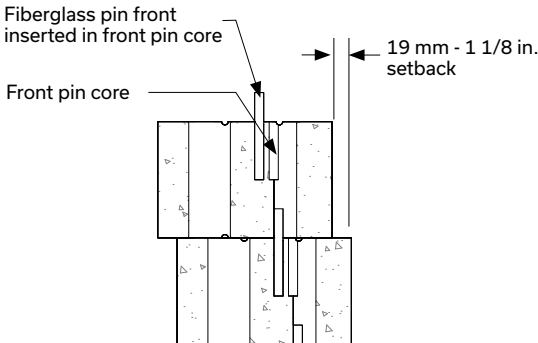

# KEYSTONE WALL - INSTALLATION

## INSTALLING GEOGRIDS

The first geogrid must be installed above the second row from the laying bed.

**1** - Cut the geogrid to required dimensions

**2** - Place it on the Keystone wall units



- The strongest direction of the geogrid should be installed perpendicular to the direction of the wall
- The pins are inserted into the cores in the geogrid

**3** - Ensure the geogrid covers the entire surface


**4** - If several geogrids are used lengthwise, make sure they don't overlap but are placed side by side without leaving any gaps.

**5** - Continue building the wall (see *Unit Connection - Top Rows* section)


### GEOGRID CONNECTION

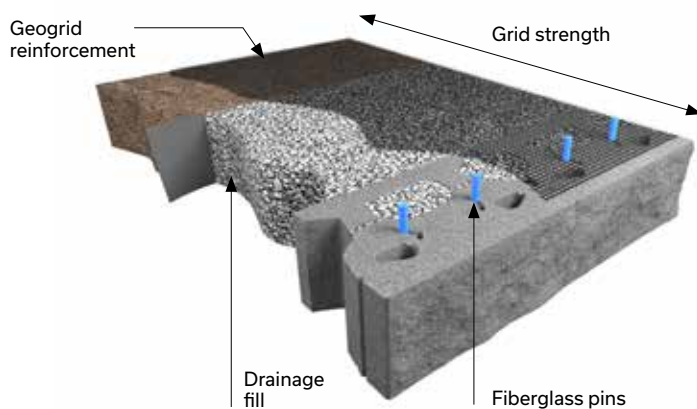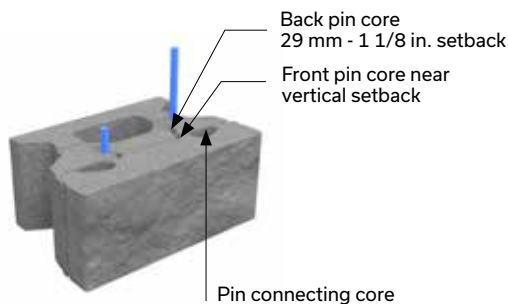

Grid and pin connection -  
near vertical setback section

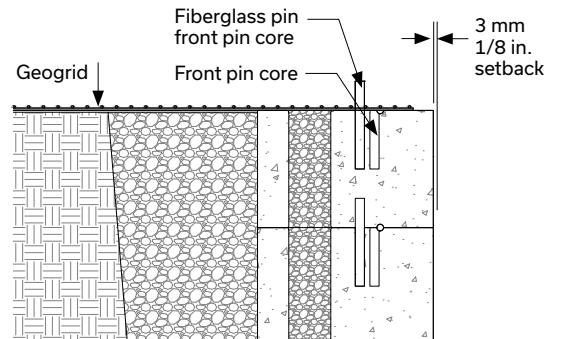

Grid and pin connection -  
29 mm - 1 1/8 in. setback section

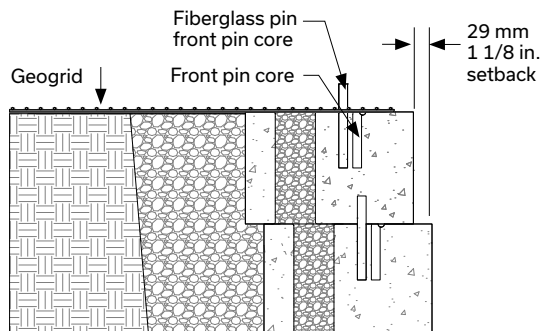

Design and installation may vary according to project and site. Please consult your Permacon representative. All project-specific information on elevation, depth, strength, soil types, etc. should be provided by an expert, such as an engineer or architect.




## CAPPING


### SECURING THE CAPPING UNITS

Once the wall has been installed to the desired height, the capping units must be installed.

- 1 - Using Techniseal® concrete adhesive, glue the clean, dry Keystone capping units to the last row of Keystone compact units, still in running bond pattern
- 2 - Make sure all capping units are level with no gap between units

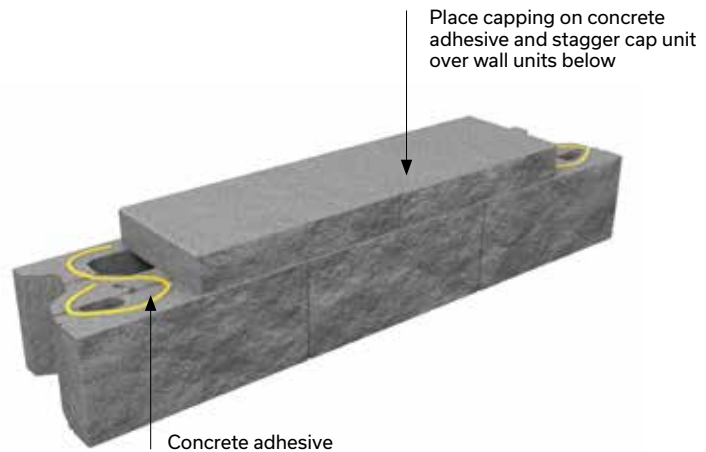


## CROSS-SECTIONS

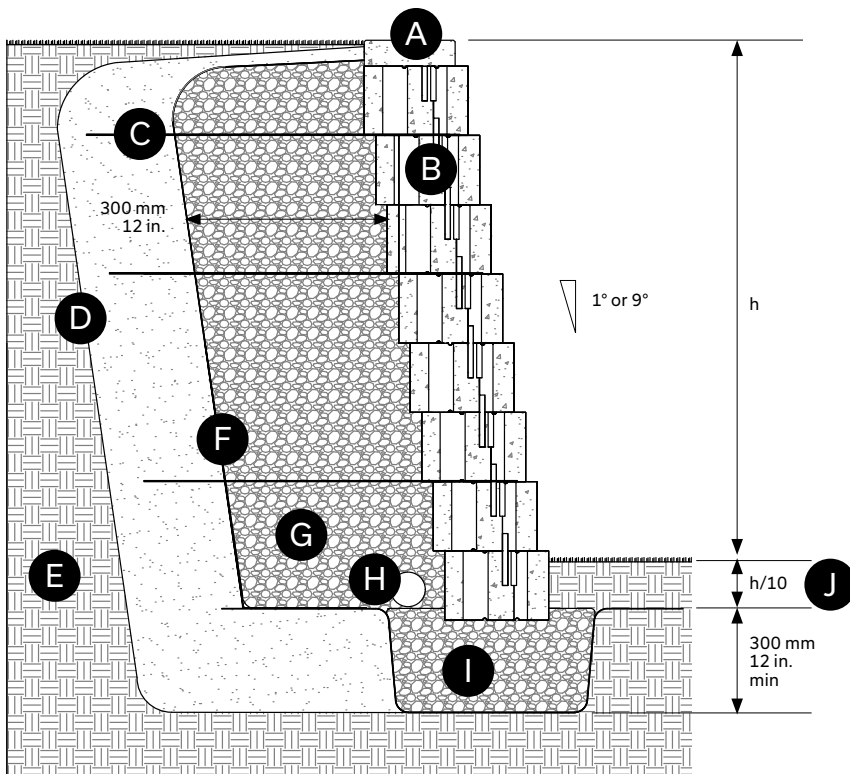


- A 102 mm - 4 in. capping unit
- B 200 mm - 8 in. Keystone unit
- C Typical geogrid (for engineering, contact your Permacon sales representative)
- D Excavation slope
- E Existing soil
- F Geotextile
- G Clean stone 20 mm - 3/4 po
- H Perforated drain connected to services: 150 mm Ø - 6 in.
- I Compacted granular foundation 0 to 20 mm - 0 to 3/4 in.
- J Minimum buried depth largest 200 mm - 8 in. or h/10

## KEYSTONE WALL - INSTALLATION


### CROSS-SECTION - 9° SETBACK WALL - NO SURCHARGE, NO SLOPE

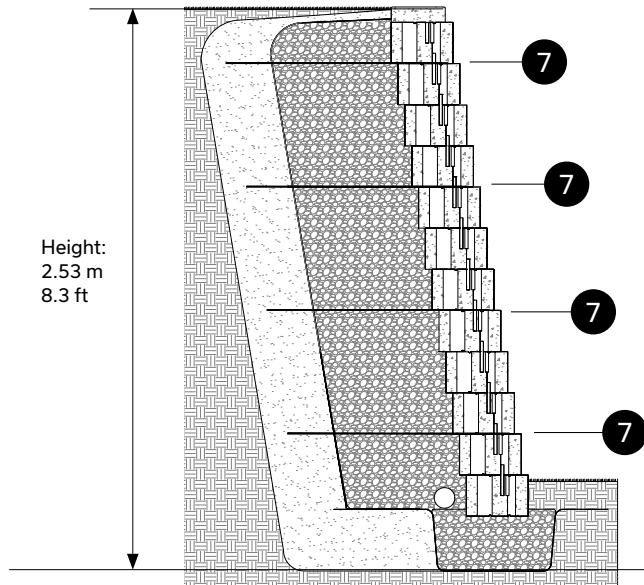


Length of the geogrid: 2.13 m - 7 ft

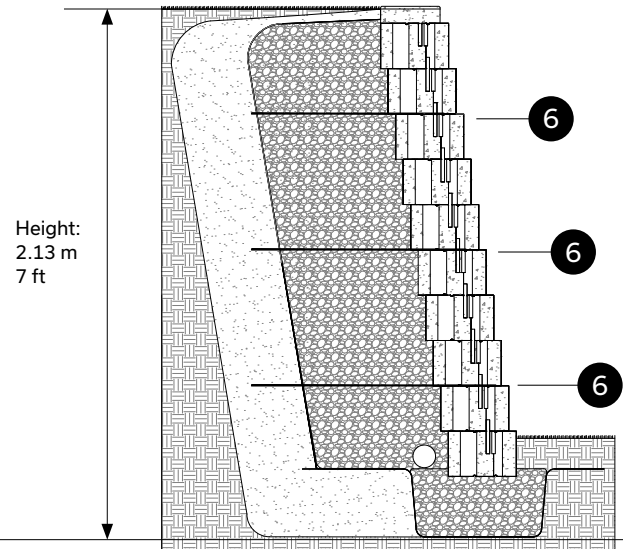

Length of the geogrid: 1.83 m - 6 ft

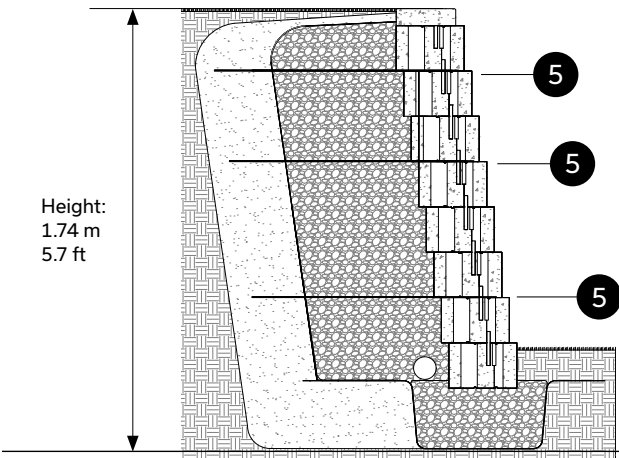

Length of the geogrid: 1.52 m - 5 ft

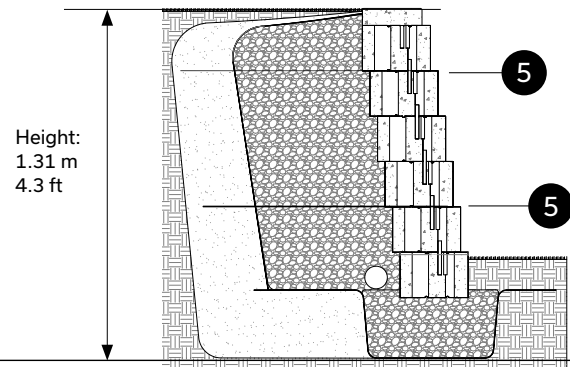


Length of the geogrid: 1.52 m - 5 ft

Maximum wall heights assume there is no surcharge behind the wall and no slope, and that the wall retains sand or gravel ( $\phi = 30$  degrees,  $\gamma = 22$  kN/m<sup>3</sup>).




# KEYSTONE WALL - INSTALLATION


## CROSS-SECTION - 1° SETBACK WALL - NO SURCHARGE, NO SLOPE

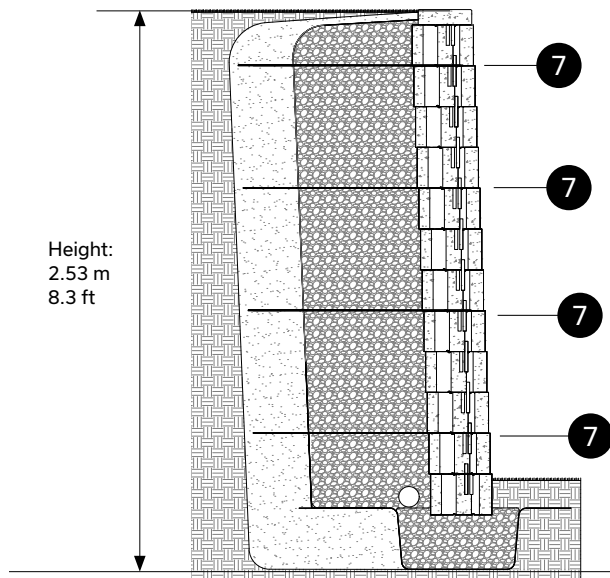


Length of the geogrid: 2.13 m - 7 ft

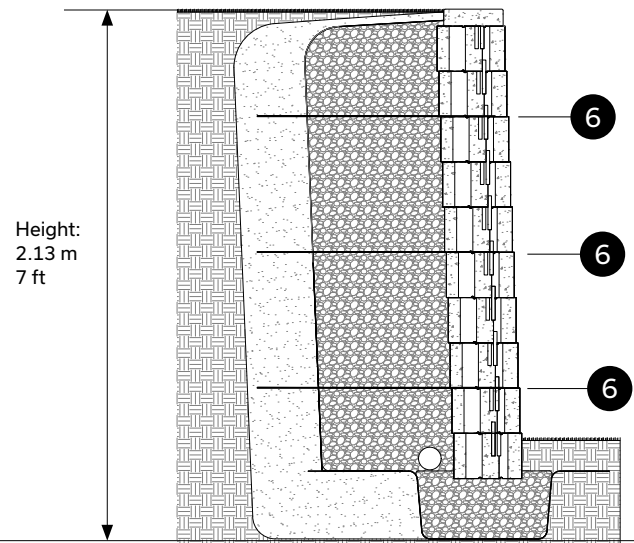

Length of the geogrid: 1.83 m - 6 ft

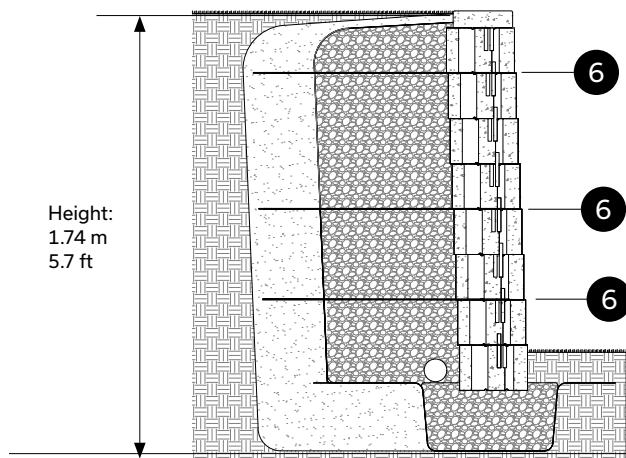

Length of the geogrid: 1.52 m - 5 ft

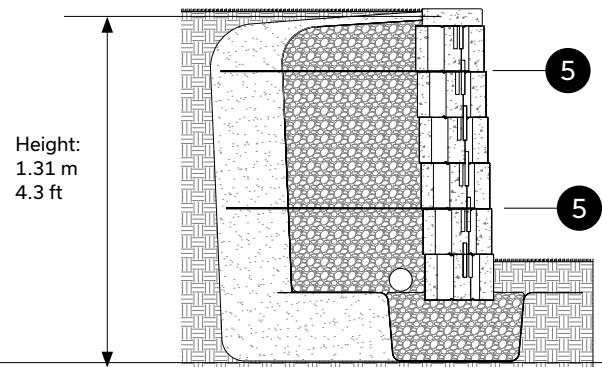

Length of the geogrid: 1.52 m - 5 ft



Maximum wall heights assume there is no surcharge behind the wall and no slope, and that the wall retains sand or gravel ( $\phi = 30$  degrees,  $\gamma = 22$  kN/m<sup>3</sup>).

# KEYSTONE WALL - INSTALLATION

## CREATING AN OUTSIDE CORNER

To create an outside corner, use Keystone corner units.


- 1 - Install the corner units as shown in the diagram below
  - Make sure both textured sides face the outside of the wall (visible side)
- 2 - At the top row, install the corner unit, alternating the textured faces with those of the bottom row, to maintain the running bond pattern and avoid vertical joint lines
- 3 - At the third row, stagger the corner units so that the vertical joints are the same as in the first row
- 4 - Repeat steps #1 and 2 for each row of Keystone wall

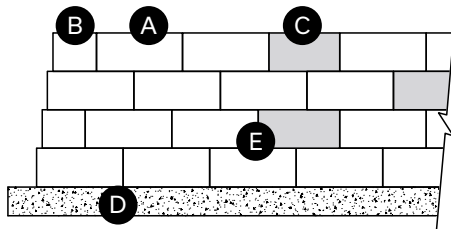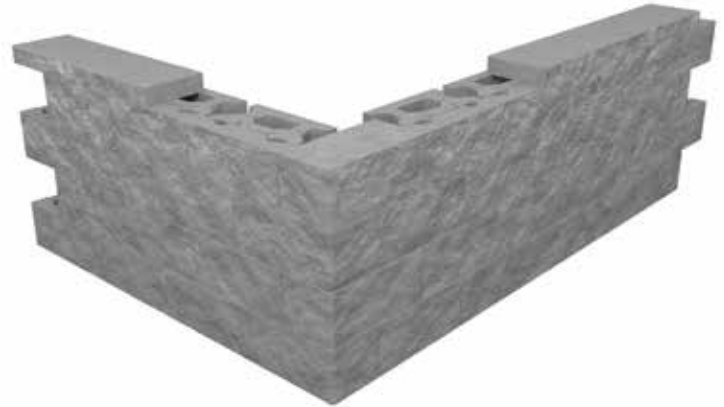

- A Keystone compact unit
- B Keystone corner unit
- C Keystone compact cut unit (both sides)
- D Compacted granular foundation
- E Full units in base course

## FENCE OR GUARDRAIL

A fence or guardrail is easily installed behind the Keystone wall, as shown in the following diagram:

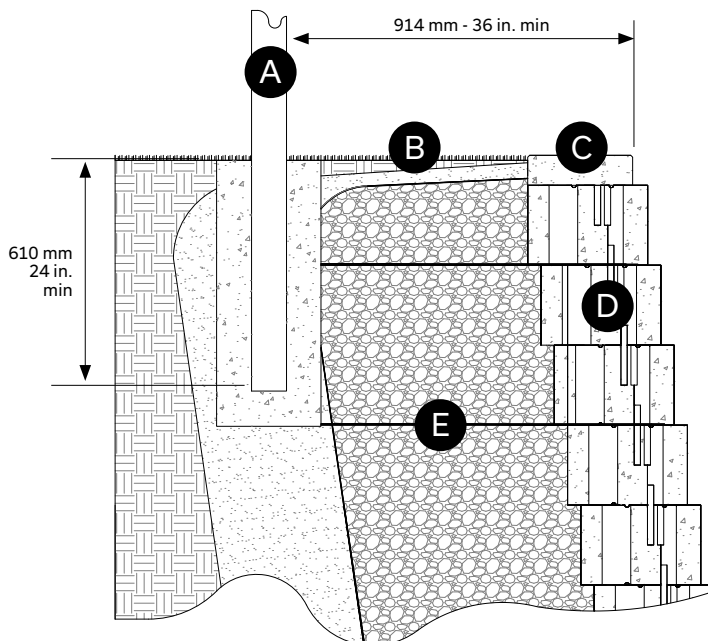

- A Fence post
- B Finished grade
- C Keystone capping unit
- D Keystone wall unit
- E Geogrid

