


2.4 kPa SURCHARGE Wallstone COPING UNIT TO BE GLUED Wallstone STANDARD UNITS (3 COURSES) Wallstone DOUBLE UNITS (7 COURSES) FREE-DRAINING GRANULAR 'B' MATERIAL COMPACTED TO 95% S.P.M.D.D. TO EXTEND 300 mm BEHIND BACK OF BASE BLOCK TOTAL MAXIMUM Wallstone TRIPLE UNITS (6 COURSES) WALL HEIGHT 1.7m ORIGINAL COMPETENT SOIL MINIMUM 100 mm Ø PERFORATED DRAIN c/w FILTER SOCK -OUTLET EVERY 15 m AND AT CORNERS AND AT ENDS OF WALL MINIMUM 200 mm OF GRANULAR 'A' MATERIAL COMPACTED TO 98% S.P.M.D.D. ORIGINAL COMPETENT SOIL OR COMPACTED STRUCTURAL FILL (BY OTHERS) TO HAVE MINIMUM BEARING <del>--|-</del>300-|-CAPACITY OF 150 kPa

## **GENERAL NOTES:**

1) EXCAVATE FOR FOOTING TO MINIMUM DEPTH OF 300 mm (12 in), OR UNTIL COMPETENT SOIL IS REACHED OR FILL WITH COMPACTED STRUCTURAL FILL (BY OTHERS). THE FOUNDING SOIL MUST BE INSPECTED BY THE GEOTECHNICAL ENGINEER TO CONFIRM ADEQUATE BEARING CAPACITY AND SLOPE STABILITY. WHERE REQUIRED BY GEOTECHNICAL ENGINEER, PLACE ENGINEERED FILL COMPRISING OF APPROVED GRANULAR MATERIAL PLACED IN 250 mm (10") LIFTS AND COMPACTED TO 98% S.P.M.D.D. BACKFILLING AND COMPACTION TO BE CARRIED OUT UNDER GEOTECHNICAL SUPERVISION. PERMACON IS NOT RESPONSIBLE FOR RETAINING A GEOTECHNICAL ENGINEER TO OVERSEE CONSTRUCTION OF RETAINING WALL.

- 2. EXCAVATION TO ALLOW FOR THE THICKNESS OF THE WALL PLUS A SUFFICIENT DISTANCE TO ALLOW FOR COMPACTED GRANULAR BACKFILL BEHIND THE WALL.
  EXCAVATE ON A SUITABLE BACK ANGLE DEEP ENOUGH TO REACH ORIGINAL
- 3. PLACE 200 mm OF GRANULAR 'A' MATERIAL WITHIN FOOTING EXCAVATION AND COMPACT TO 98% STANDARD PROCTOR MAXIMUM DRY DENSITY
- 4. LEVEL THE FIRST COURSE AND PLACE TOP FLUSH WITH THE DESIRED FINISHED GRADE IN FRONT OF THE WALL. SLOPES AT THE TOE OF WALL MAY REQUIRE MORE UNITS TO BE BURIED (CONSULT QUALIFIED PROFESSIONAL ENGINEER FOR GUIDANCE).
- 5. WALL APPEARANCE TO BE SPLIT FACE AND COLOR TO BE DETERMINED BY OWNER.
- 6. BACKFILL THE WALL WITH GRANULAR 'B' MATERIAL AS THE HEIGHT INCREASES, COURSES WITHOUT BACKFILLING UNLESS OTHERWISE DIRECTED BY THE ENGINEER. BACKFILL MUST BE COMPACTED TO 95% S.P.M.D.D.
- 7. ALL CONSTRUCTION OPERATIONS INCLUDING BLOCK PLACEMENT, BACKFILLING AND COMPACTION TO BE COMPLETED UNDER GEOTECHNICAL SUPERVISION.
- 8. POOR SOIL CONDITIONS AND EXCESSIVE MOISTURE MAY REQUIRE ALTERNATE DRAINAGE REQUIREMENTS AND DESIGN MODIFICATIONS.
- 9. TO ACHIEVE A 7° BATTER, STEP BACK EVERY SECOND COURSE.
- 10. THE TOP MUST BE LANDSCAPED TO PROMOTE SURFACE RUNOFF OVER THE TOP OF THE WALL. NO UNUSUAL SURCHARGE LOADING SHOULD BE ADJACENT TO THE TOP OF
- 11. APPROPRIATE RESTRAINT MUST BE PROVIDED TO ENSURE PEDESTRIANS CANNOT ACCESS THE TOP OF THE WALL, OTHERWISE AN ENGINEERED HANDRAIL SYSTEM WILL BE REQUIRED ON THE TOP OF THE WALL. PROVISION OF A HANDRAIL ON TOP OF THE WALL MAY REQUIRE DESIGN MODIFICATIONS.
- 12. ALL PRODUCT NAMES AND STYLIZED REPRESENTATIONS ARE TRADEMARKS OF PERMACON, OR APPROVED FOR USE BY PERMACON COMPANIES.
- 13. ALL PRODUCTS ILLUSTRATED ARE SUBJECT TO PATENTS AS FOLLOWS: Wallstone - CANADA 1,307,675 - USA 4,860,505
- 14. THE APPLICABILITY OF THESE RETAINING WALL SECTIONS MUST BE REVIEWED ON A SITE SPECIFIC BASIS BY A QUALIFIED PROFESSIONAL ENGINEER.
- 15. FOR OTHER WALL HEIGHTS, SOIL PARAMETERS AND SURCHARGE LOADING NOT REPRESENTED ON THIS DRAWING, PLEASE CONTACT PERMACON FOR SITE SPECIFIC

SOIL PARAMETERS USED IN DESIGNS: REINFORCED SOIL: φ = 34 DEGREES, γ = 21 kN/m³ RETAINED SOIL: \$\phi = 28 DEGREES, \$\gamma = 19 kN/m^3

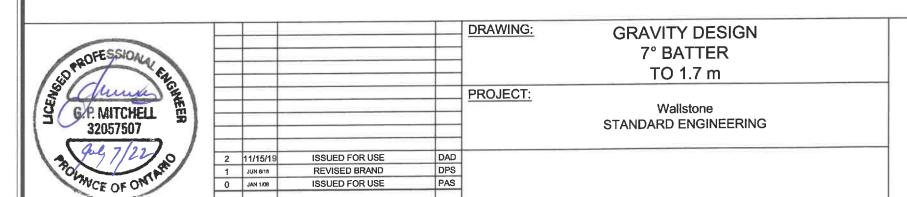

PAS

BY

ISSUED FOR USE

DESCRIPTION

O JAN 1/08

REV. DATE

PERMACON A CRH COMPANY

Wallstone



DATE: **NOVEMBER 19, 2007** SCALE:

Wallstone-NOT TO SCALE SE-GR-7 DEGREE

FILE NAME: WS-SE-GR-7 DEGREE.dwg