


# Kensington Smooth Paver




## Rectangle




	Dimensions mm	Dimensions in.
	80 x 209 x 279	3 1/8 x 8 1/4 x 11
Weight/unit	10.29 kg	22.70 lb
Units/area	-	1.55 units/ft <sup>2</sup>
Area/section	-	23.17 ft <sup>2</sup>
<b>Area/cube</b>	-	<b>91.14 ft<sup>2</sup></b>
Length/section	-	25 lin. ft
Length/cube	-	100 lin. ft
Qty	144 units/cube	36 units/section
Weight	1486 kg	3270 lb

Code	Colour
10506699	Sierra Black
Sold in full cubes only	
Production location Cambridge	

## Typical Row




## Mixed Bundle

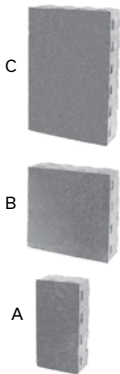


	Dimensions mm	Dimensions in.
C	80 x 279 x 419	3 1/8 x 11 x 16 1/2
Weight/unit	21.36 kg	47.10 lb
Units/area	-	0.78 unit/ft <sup>2</sup>
Qty/cube	36 units	36 units
B	80 x 279 x 279	3 1/8 x 11 x 11
Weight/unit	14.33 kg	31.60 lb
Units/area	-	1.17 units/ft <sup>2</sup>
Qty/cube	36 units	36 units
A	80 x 139 x 279	3 1/8 x 5 1/2 x 11
Weight/unit	7.07 kg	15.60 lb
Units/area	-	2.32 units/ft <sup>2</sup>
Qty/cube	36 units	36 units
<b>Area/cube</b>	-	<b>91.14 ft<sup>2</sup></b>
Weight/cube	1507 kg	3316 lb

Code	Colour
10506622	Ash Grey Blend
10506693	Canyon Grey Blend
10506694	Desert Grey Blend
10506692	Granite Blend
Sold in full cubes only	
Production location Woodstock	


## Typical Row




## Laying Pattern




Pattern 1:  
3 Stone Random



Pattern 2:  
3 Stone Running Bond



Pattern 3: Herringbone  
100% Rectangle



Pattern 4: Running Bond  
100% Rectangle

1 bag of sand covers approx. 37 ft<sup>2</sup>

## TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Kensington Smooth Paver</b>	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.