

Wall Characteristics

TYPE OF BLOCK	INSTALLATION	MAXIMUM HEIGHT AT THE TOP OF WALL INCLUDING BURIED UNIT WITHOUT OVERLOAD		MINIMUM POSSIBLE RADIUS		WALL ANGLE	AMOUNT OF WALL UNITS REQUIRED	
		FT	M	FT	M		/FT ²	/M ²
Tandem System (Lafitt, Melville)	Angled	3.5	1.1	4.0	1.2	9	variable	variable
	Vertical	2.2	0.67	4.0	1.2	0	variable	variable
Celtik® 90 Wall	Angled	3.5	1.1	3.0	0.9	9	variable	variable
	Vertical	2.2	0.67	3.0	0.9	0	variable	variable
Grande Wall (see note)	375, 750, 1125 units	8.5	2.6	65	20	0	5	0.46
	375, 750, 1125 units	10.5	3.2	65	20	9	5	0.46
	375, 750, 1125 units	13.1	4.0	65	20	17	5	0.46
Keystone Wall (see note)	Compact	3.0	0.9	4.0	1.2	0 or 9	22 and/or 11	2 and/or 1
Orion Wall	Vertical	2.3	0.72	-	-	0	variable	variable
RB wall	Angled	2.4	0.60	-	-	9.6	3.10	33.40
Split-face Universal* Slope Block Wall	Without joints	5.0	1.5	5.0	1.5	10	35	3.2
	50 mm - 2 in. joints	4.25	1.3	5.0	1.5	10	28	2.6
	100 mm - 4 in. joints	3.7	1.1	5.0	1.5	10	24	2.2
Universal* Slope Wall	Without joints	4.00	1.20	5.0	1.5	15	35	3.2
	50 mm - 2 in. joints	3.25	1.00	5.0	1.5	15	28	2.6
	100 mm - 4 in. joints	2.75	0.80	5.0	1.5	15	24	2.2
Urbano Wall	Angled	2.4	0.72	-	-	3	variable	variable
	Vertical	2	0.60	-	-	0	variable	variable
Vario wall (90 - 180 mm)	Angled	3.5 - 2.3	1.08 - 0.72	-	-	9.46	variable	variable
	Vertical	2.3 - 1.75	0.72 - 0.54	-	-	0	variable	variable
Vario Lafitt Wall (90 - 180 mm)	Angled	3.5 - 2.3	1.08 - 0.72	-	-	9.46	variable	variable
	Vertical	2.3 - 1.75	0.72 - 0.54	-	-	0	variable	variable
Wallstone Wall	Angled	16	0.40	-	-	14	3.10	33.40
	Vertical	16	0.40	-	-	0	3.10	33.40
Wedgestone Wall	Angled	16	0.40	2.0	0.6	14	variable	variable
	Vertical	16	0.40	2.0	0.6	0	variable	variable

NOTE: The walls can be installed with other height and overload specifications than those above. Specific designs for special project conditions are available. Consult your Permacon Sales Representative for details.

The information contained in these technical documents is supplied for information purposes only. Any application of the information is the sole responsibility of the installer. The installer must ensure that the installation and use of retaining wall projects comply with local regulations and code requirements. A qualified engineer must be consulted for final design for construction purposes. Oldcastle Building Products Canada, Inc. and its affiliates cannot be held responsible for the improper use of information contained in these technical documents.

Wall Index

Walls

Tandem Next Sytem Wall	53
Tandem System Wall	73
- Building a Double-Sided Wall	84
- Building Stairs	94
- Building Pillars	97
- Outdoor Living Components	107
Celtik Plus 90 Wall	134
Grande Wall	141
Orion Wall	190
RB Wall	196
Universal Slope Block Wall	198
Urbano Wall	199
Vario Wall	215
Wallstone and Wedgestone Walls	271
Wall Installation Guidelines Wall	275
Keystone Wall	277

PACKAGING

For product packaging information, please refer to our Product Data Guide on our website.



English
Quebec



English
Ontario



The information contained in these technical documents is supplied for information purposes only. Any application of the information is the sole responsibility of the installer. The installer must ensure that the installation and use of retaining wall projects comply with local regulations and code requirements. A qualified engineer must be consulted for final design for construction purposes. Oldcastle Building Products Canada, Inc. and its affiliates cannot be held responsible for the improper use of information contained in these technical documents.

Vario Wall

DESCRIPTION



The Vario wall, the wall that does it all. Install a block unit, slide another one over it, and so on. This results in a modern wall with clean lines.

Versatile and innovative, this product can be used for retaining walls, creating privacy spaces and outdoor kitchens. Available in two heights (90 or 180 mm), the Vario wall is perfect for steps and modular installations.

Note that all units are double-sided, and that they are all (including corner units) on the same pallet. Their popular colours fit perfectly with Permacon's numerous cappings.



BENEFITS:

- > Quick and easy to install
- > No accessories required
- > All double-sided units
- > 90 mm and 180 mm heights, ideal for steps and modular installations
- > Smooth texture
- > Available in trendy colours that match slabs, pavers and capping units
- > Build retaining walls, raised gardens, double-sided walls, outdoor kitchens, and more!

The information contained in these technical documents is supplied for information purposes only. Any application of the information is the sole responsibility of the installer. The installer must ensure that the installation and use of retaining wall projects comply with local regulations and code requirements. A qualified engineer must be consulted for final design for construction purposes. Oldcastle Building Products Canada, Inc. and its affiliates cannot be held responsible for the improper use of information contained in these technical documents.

Vario Wall 90 mm



90 mm UNITS

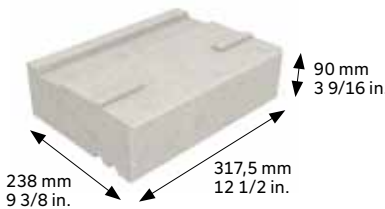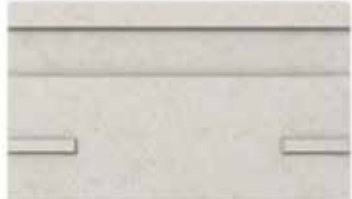	SHORT UNIT	MEDIUM UNIT	LONG UNIT
ISOMETRIC VIEW			
FRONT VIEW			
PLAN VIEW			

Note that Short, Medium and Long units are packaged on the same cube.

90 mm RIGHT CORNER UNITS


Only Long and Medium units are available as corners. On corner units, the groove does not run the full length.

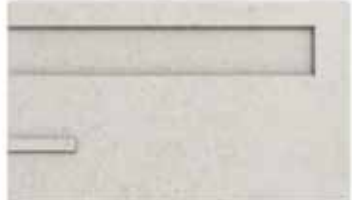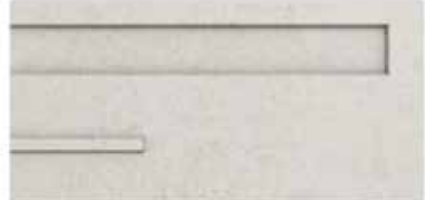	CORNER UNIT MEDIUM - RIGHT	CORNER UNIT LONG - RIGHT
ISOMETRIC VIEW		
FRONT VIEW		
PLAN VIEW		


90 mm LEFT CORNER UNITS

Only Long and Medium units are available as corners. On corner units, the groove does not run the full length.

CORNER UNIT
MEDIUM - LEFT

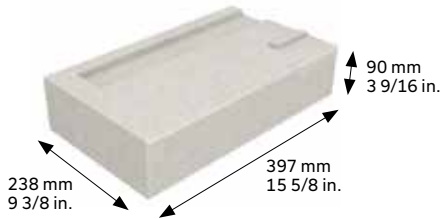

CORNER UNIT
LONG - LEFT

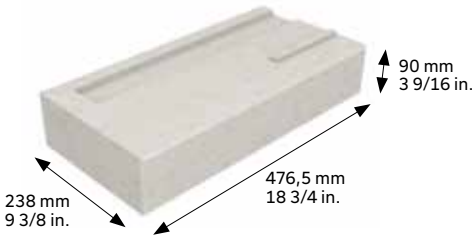

ISOMETRIC VIEW


FRONT VIEW

PLAN VIEW




BASIC PRINCIPLES

90 mm medium
left corner unit

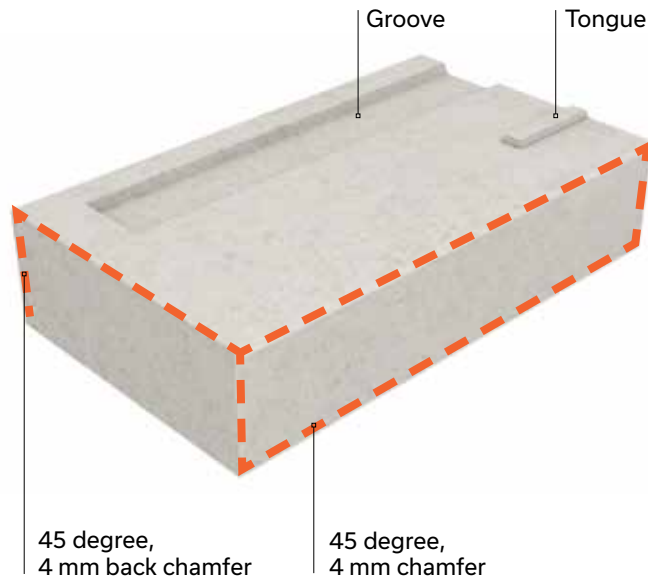


90 mm medium
underside unit

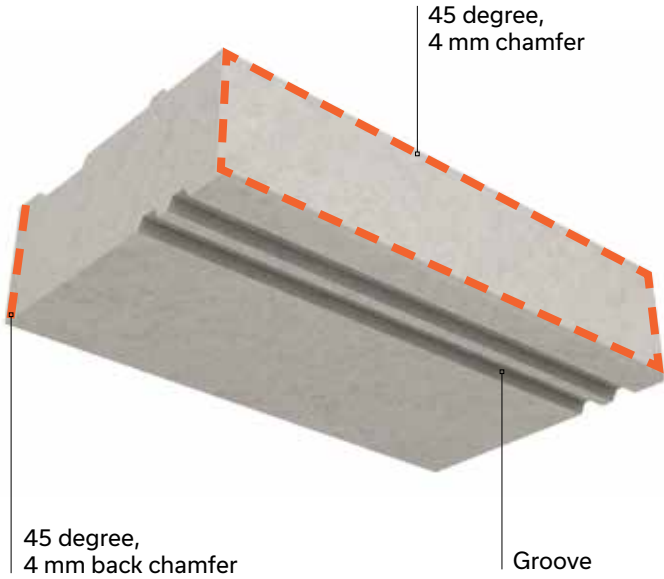

Vario Wall 180 mm


TYPICAL ROW

4 integrated corners per row: 1 right long, 1 right medium, 1 left long, 1 left medium

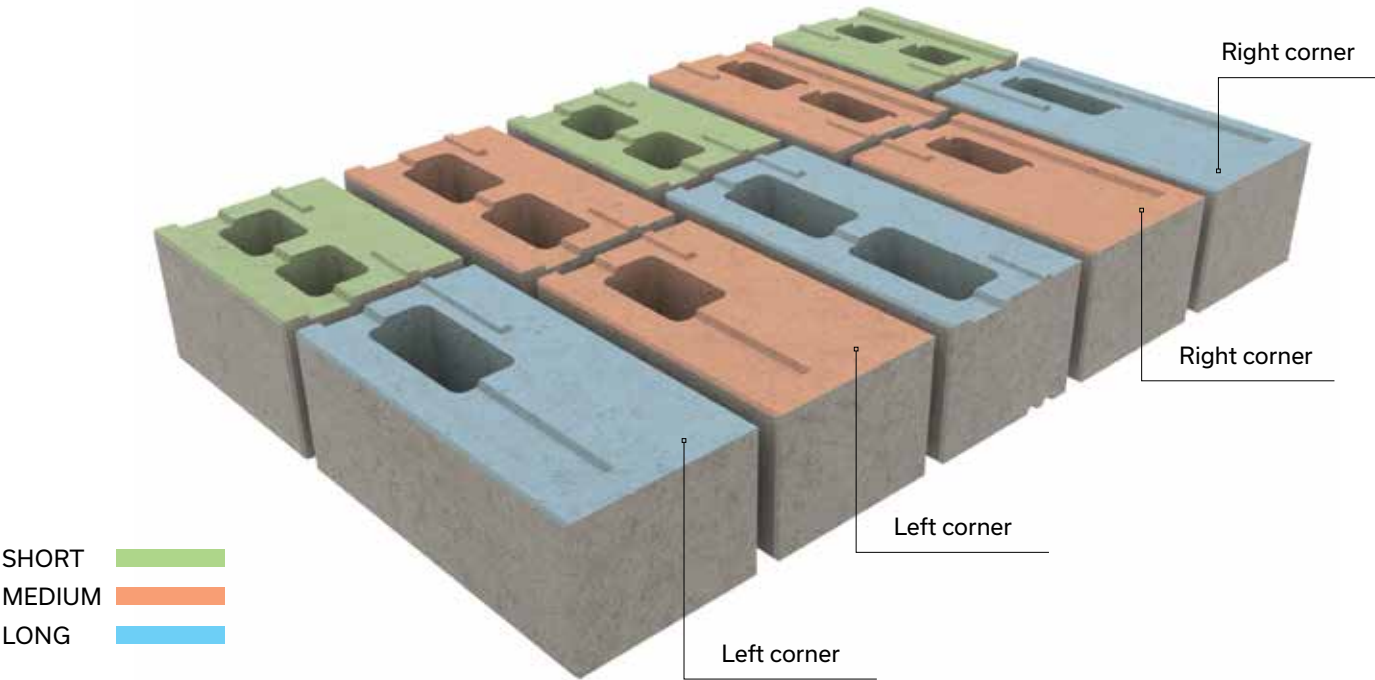


LAYING PATTERNS


LINEAR PATTERN - 100% VARIO 90

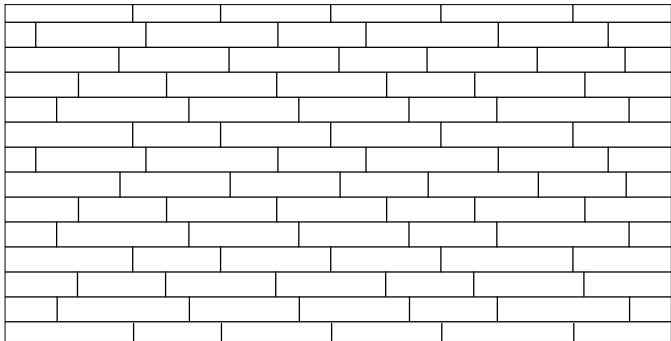

LINEAR PATTERN - 100% VARIO 180

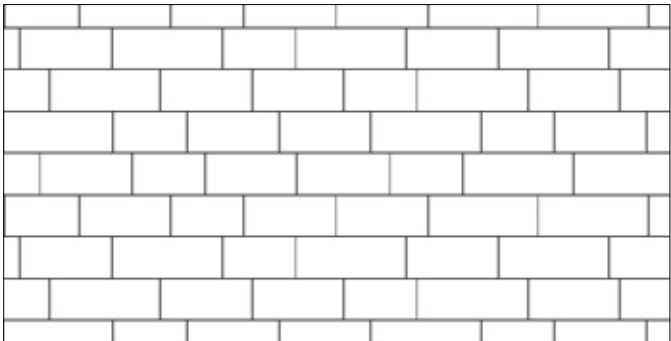

MODULAR PATTERN - 50% VARIO 90 AND 50% VARIO 180

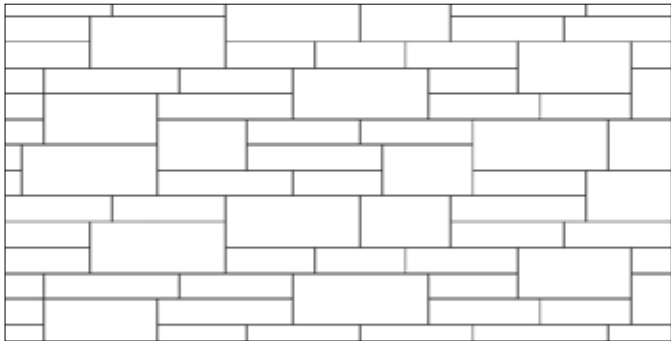


Vario Wall 180 mm

CROSS-SECTION - SETBACK WALL

Vario wall 180 mm installed with a setback (30 mm per row) can go up to 4 row (total height of 720 mm or 28 in.)

- > Create the setback by installing the outer groove (female) on the tongue (male) at every row
- > Always have the cavities on the inside of the wall
- > You don't have to fill the cavities with clean stone in a standard installation
- > At the very last row, turn the unit upside down to have the tongues downward. Then, use Techniseal concrete adhesive to glue the capping unit of your choice.

No accessory required for the Vario wall.
You don't have to use concrete adhesive between each row of the Vario wall.

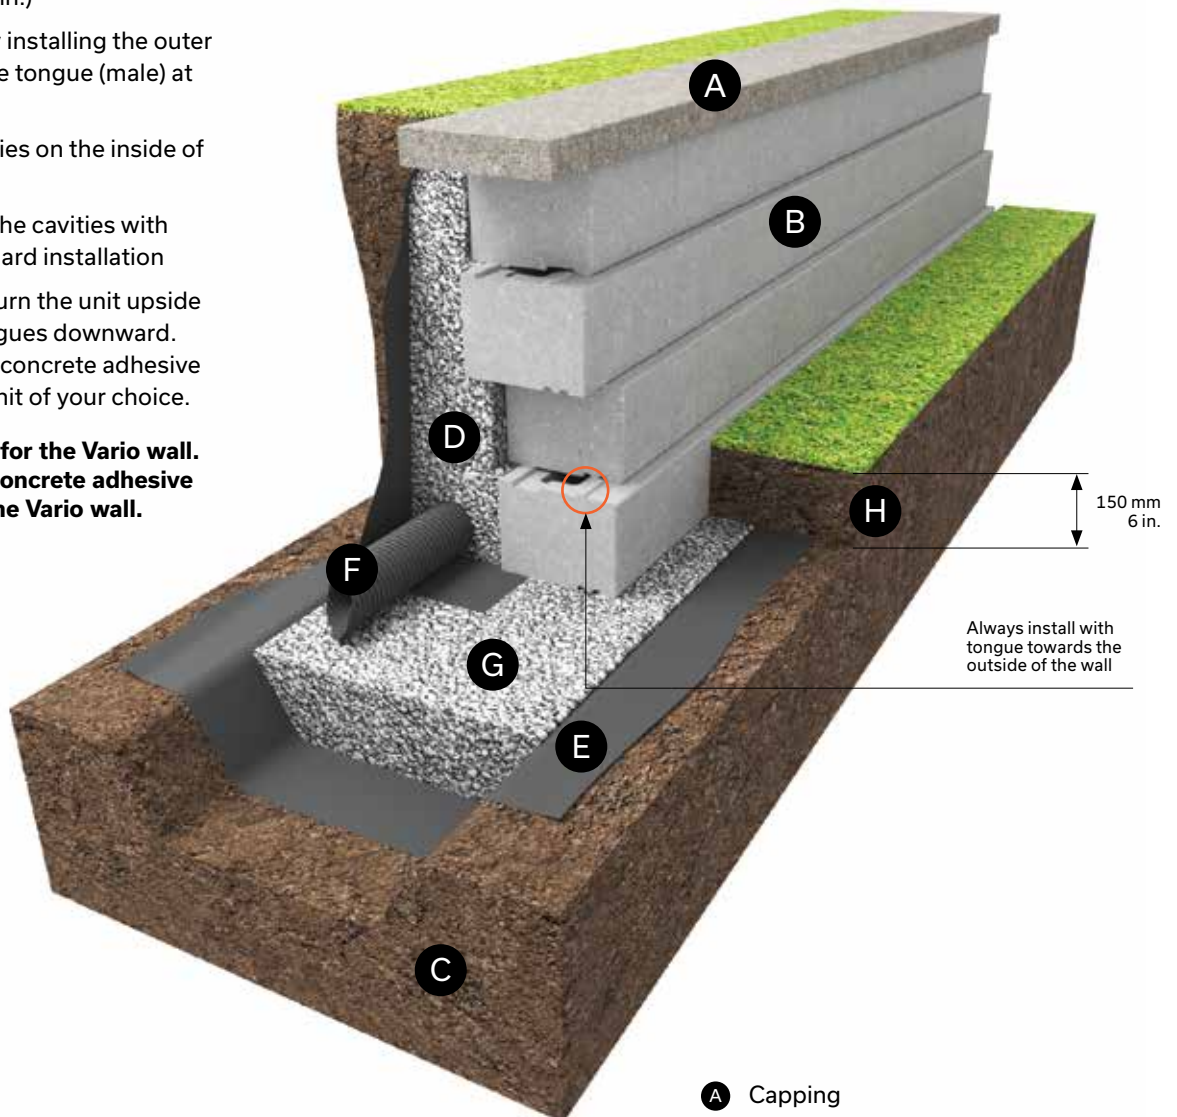


ISOMETRIC VIEW

- Ⓐ Capping
- Ⓑ Vario wall 180 mm
- Ⓒ Undisturbed soil
- Ⓓ Clean stone 20 mm - 3/4 in. - Depth: 300 mm - 12 in. minimum
- Ⓔ Geotextile membrane
- Ⓕ Perforated drain connected to services: 100 mm Ø - 4 in.
- Ⓖ Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. Depth: 300 mm - 12 in. minimum
- Ⓗ Minimum buried depth 150 mm - 6 in.

Maximum gravity wall heights assume no slopes or surcharge behind the wall and that the wall retains sand or gravel ($\phi = 34$ degrees, $\gamma = 19 \text{ kN/m}^3$)²

CROSS-SECTION - SETBACK GRAVITY WALL

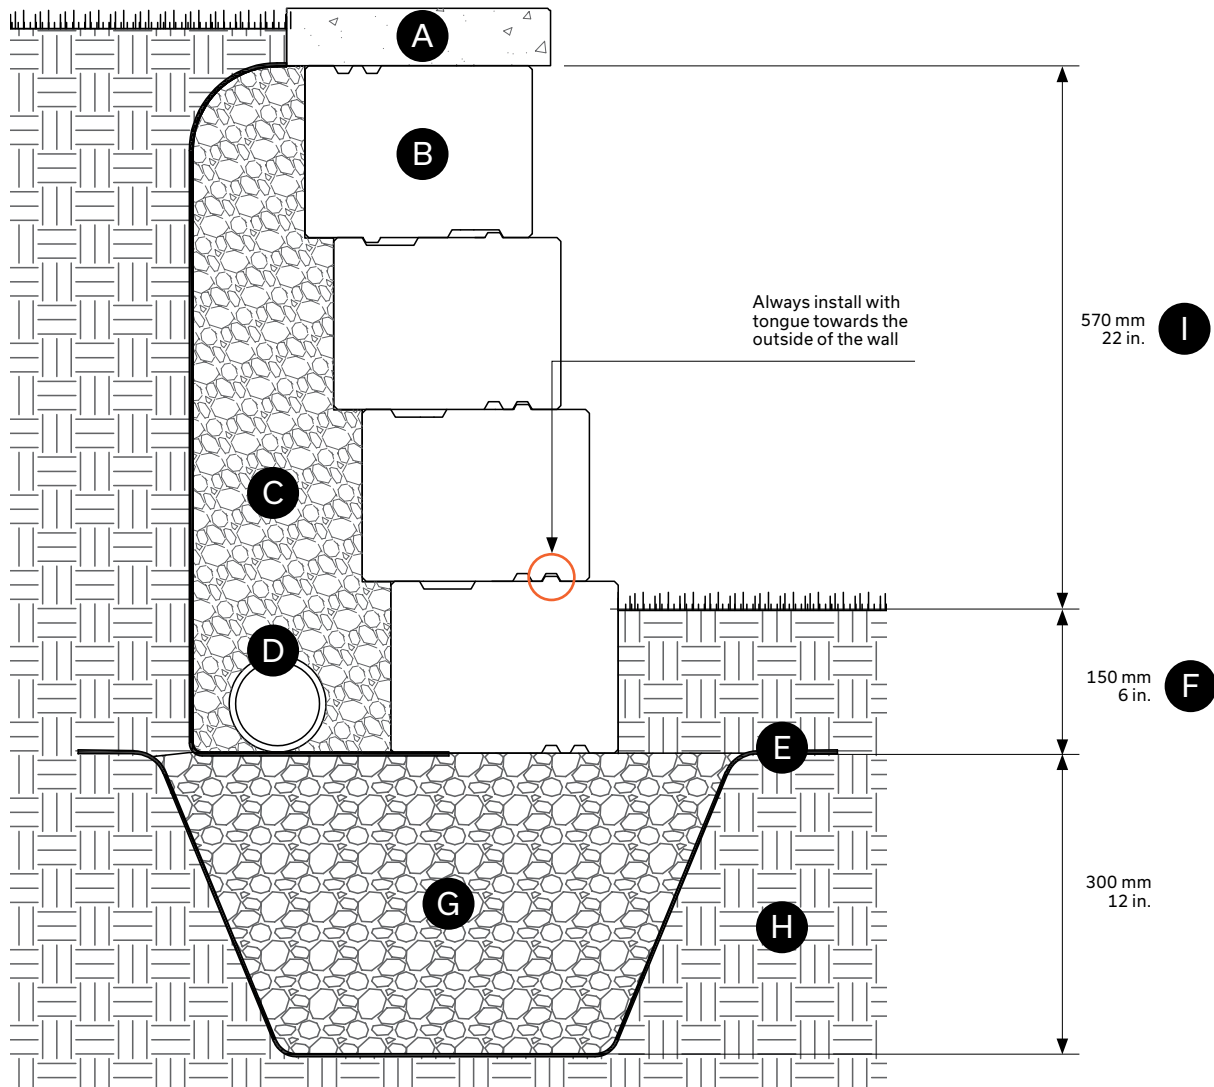

- A Capping
- B Vario wall 180 mm
- C Clean stone 20 mm - 3/4 in. - Depth: 300 mm - 12 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping

Maximum gravity wall heights assume no slopes or surcharge behind the wall and that the wall retains sand or gravel ($\phi = 34$ degrees, $\gamma = 19 \text{ kN/m}^3$)²


Vario Wall 180 mm

CROSS-SECTION - VERTICAL WALL

Vario wall 180 mm installed in a vertical application can go up to 3 rows (total height of 540 mm or 21 in.).

- > Always have the cavities on the inside of the wall
- > You don't have to fill the cavities with clean stone in a standard installation
- > At the very last row, turn the unit upside down to have the tongues downward. Then, use Techniseal concrete adhesive to glue the capping unit of your choice.

No accessory required for the Vario wall. You don't have to use concrete adhesive between each row of the Vario wall.

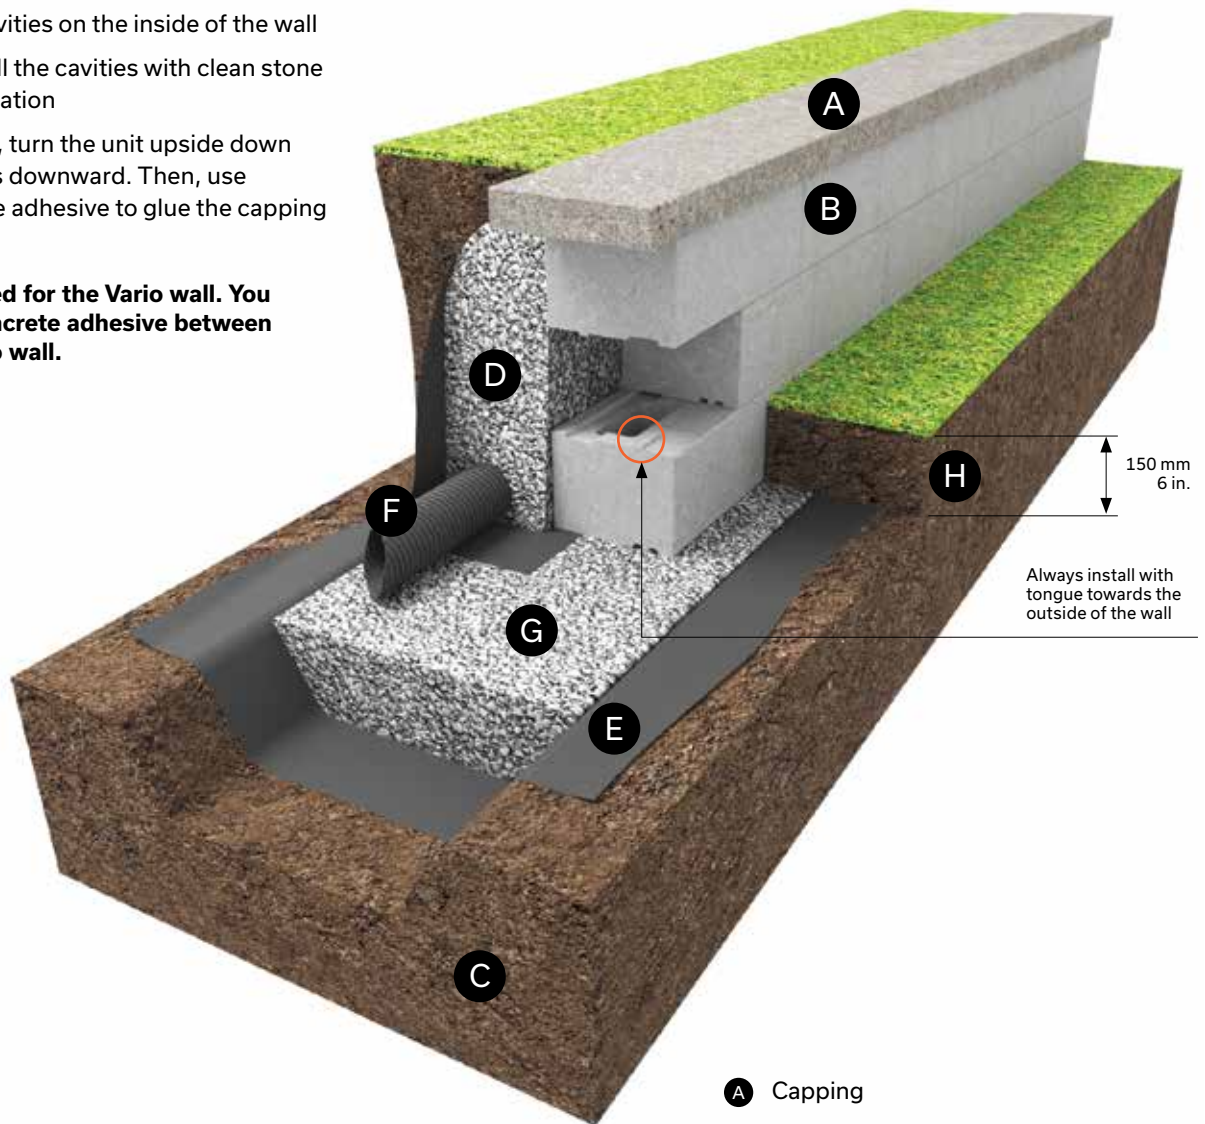


ISOMETRIC VIEW

- A** Capping
- B** Vario wall 180 mm
- C** Undisturbed soil
- D** Clean stone 20 mm - 3/4 in. -
Depth: 300 mm - 12 in. minimum
- E** Geotextile membrane
- F** Perforated drain connected to services:
100 mm Ø - 4 in.
- G** Compacted granular foundation:
0 to 20 mm - 0 to 3/4 in.
Depth: 300 mm - 12 in. minimum
- H** Minimum buried depth 150 mm - 6 in.

Maximum gravity wall heights assume no slopes or surcharge behind the wall and that the wall retains sand or gravel ($\phi = 34$ degrees, $\gamma = 19 \text{ kN/m}^3$)²

Vario Wall 180 mm

CROSS-SECTION - VERTICAL GRAVITY WALL

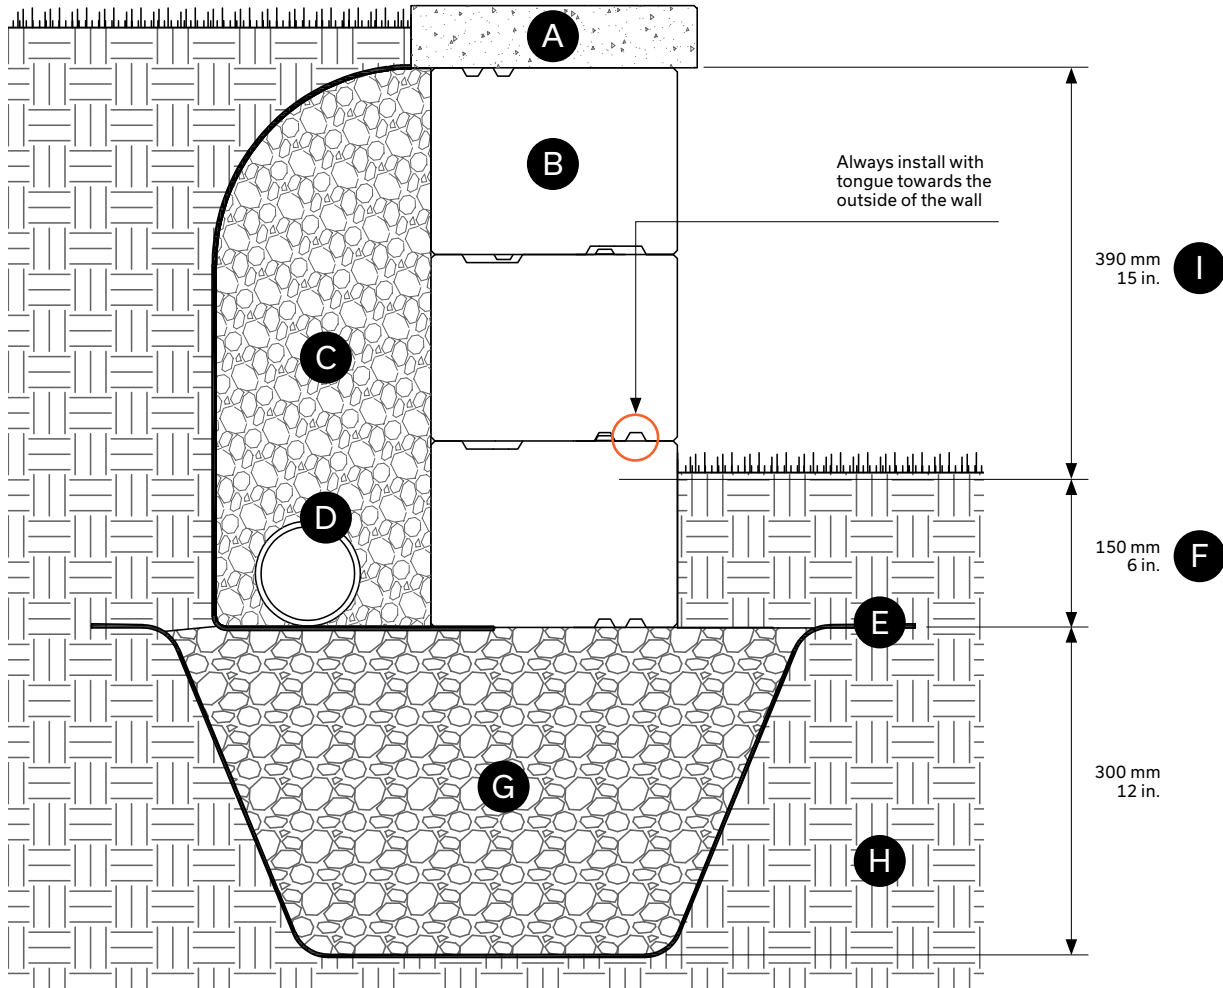

- A Capping
- B Vario wall 180 mm
- C Clean stone 20 mm - 3/4 in. - Depth: 300 mm - 12 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height without surcharges or slopes behind the wall, excluding the buried units and capping

Maximum gravity wall heights assume no slopes or surcharge behind the wall and that the wall retains sand or gravel ($\phi = 34$ degrees, $\gamma = 19 \text{ kN/m}^3$)²


Vario Wall 180 mm

CROSS-SECTION - DOUBLE-SIDED WALL

Vario wall 180 mm installed in a double-sided application can go up to 5 rows (total height of 900 mm or 35 in.).

- > Fill the cavities of the 180 mm units with clean stone.
- > It is required to use concrete adhesive between each row of Vario wall when installed in a double-sided application.
- > At the very last row, turn the unit upside down to have the tongues downward. Then, use Techniseal concrete adhesive to glue the capping unit of your choice.

No accessory required for the Vario wall.

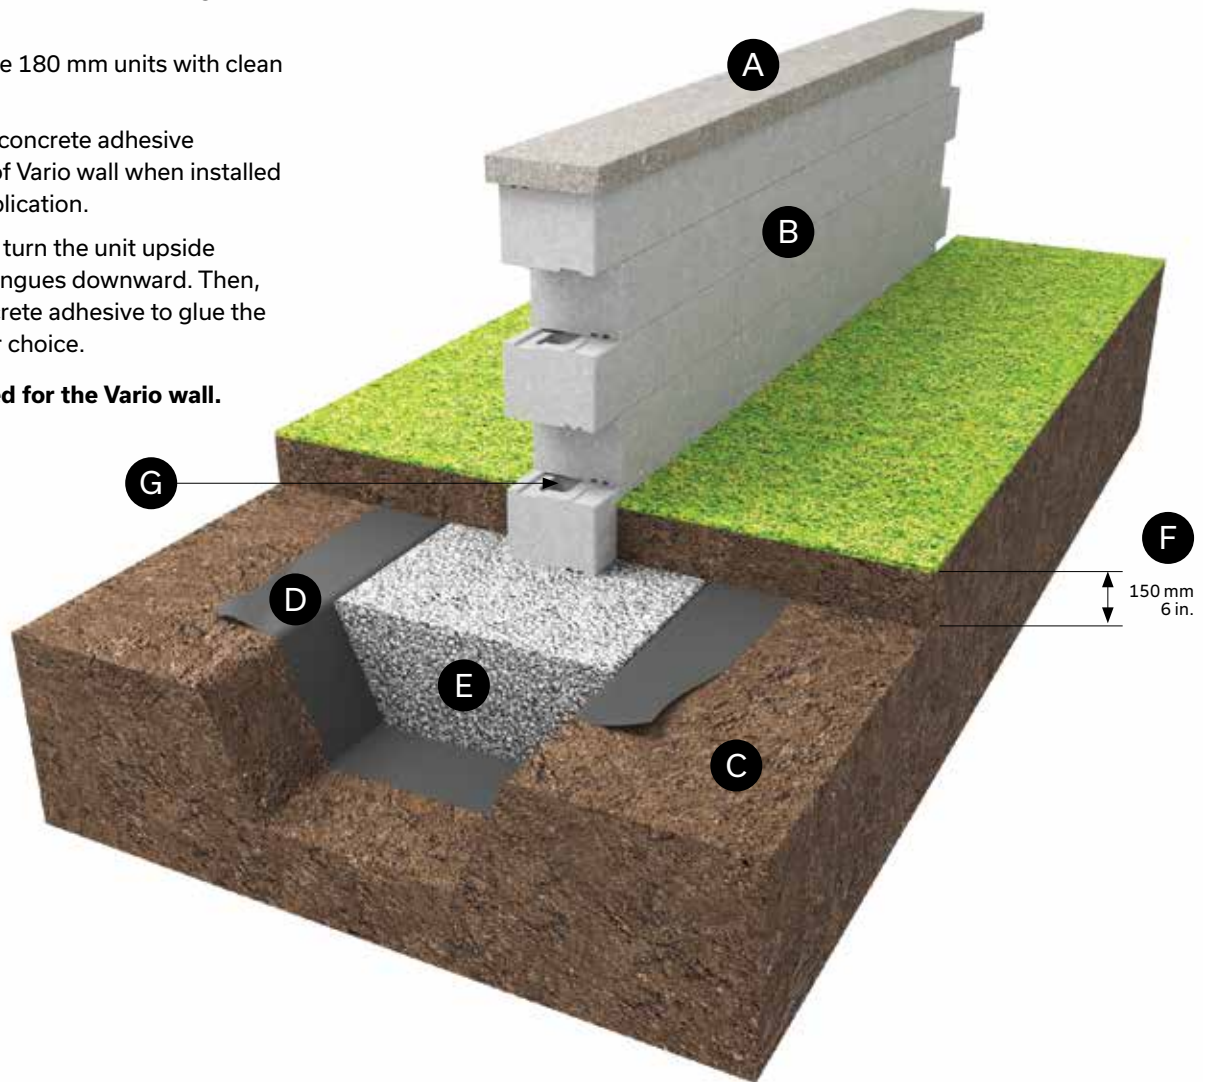


ISOMETRIC VIEW

- (A) Capping
- (B) Vario wall 90 mm
- (C) Undisturbed soil
- (D) Geotextile membrane
- (E) Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in.
Depth: 300 mm - 12 in. minimum
- (F) Minimum buried depth 150 mm - 6 in.

Maximum double-sided wall heights assume there is no soil to retain nor any surcharge

CROSS-SECTION - DOUBLE-SIDED WALL

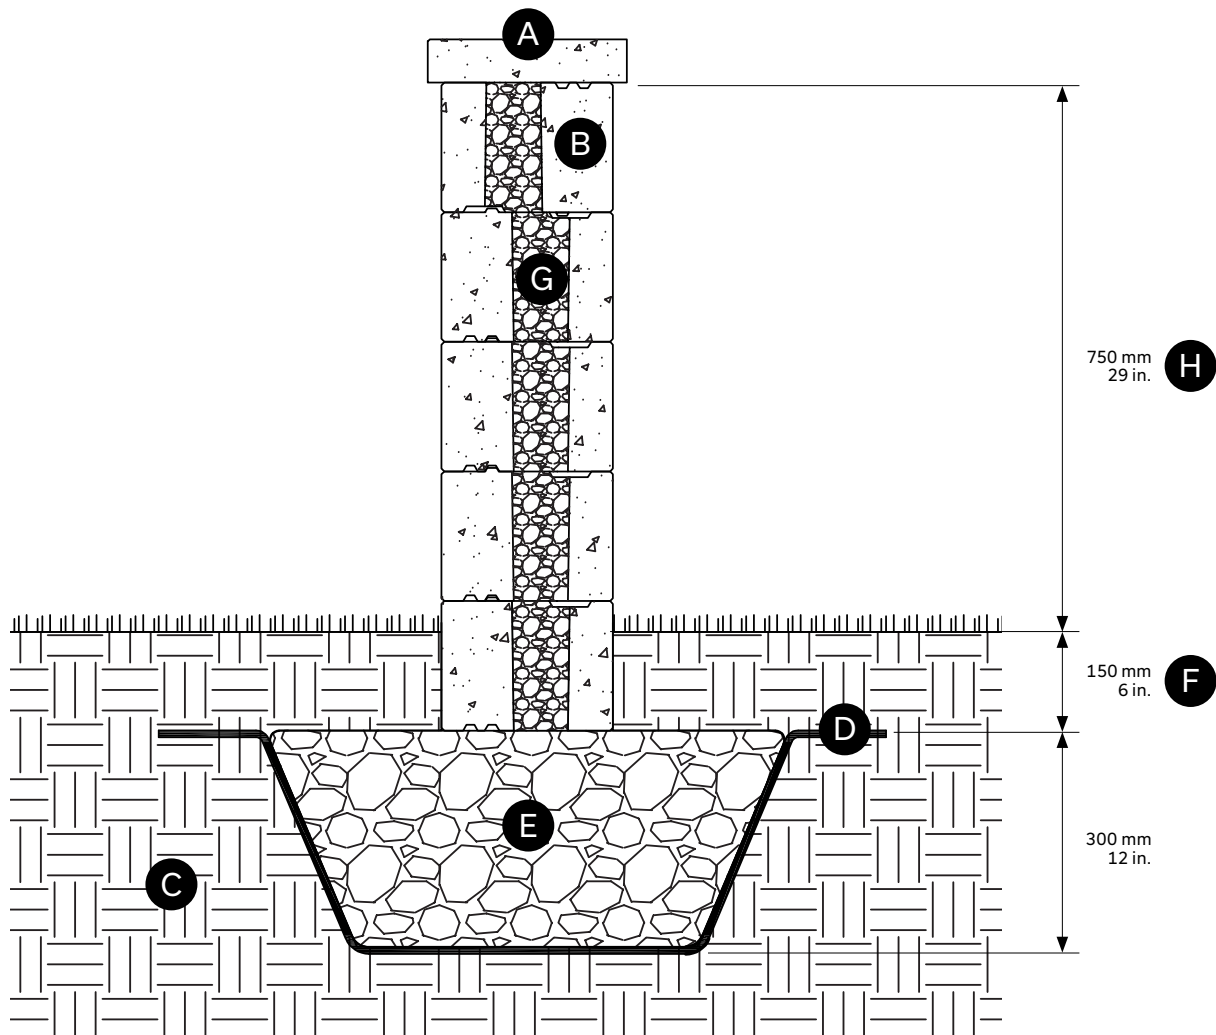

- Ⓐ Capping
- Ⓑ Vario wall 90 mm
- Ⓒ Undisturbed soil
- Ⓓ Geotextile membrane
- Ⓔ Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in.
Depth: 300 mm - 12 in. minimum
- Ⓕ Minimum buried depth 150 mm - 6 in.
- Ⓖ Clean stone (in the wall cavities)
- Ⓗ Maximum height without surcharges or slopes behind the wall, excluding the buried units and capping


Vario Wall 180 mm

CROSS-SECTION - CREATING VARIO WALL STEPS

To create steps, install the Melville Plus 60 step combined with the Vario wall units used as risers, as detailed below:

To complete the last row, turn the exposed unit upside down to have the tongues downward. Then, use Techniseal concrete adhesive to glue the step unit.


No accessory required for the Vario wall. You don't have to use concrete adhesive between each row of the Vario wall.

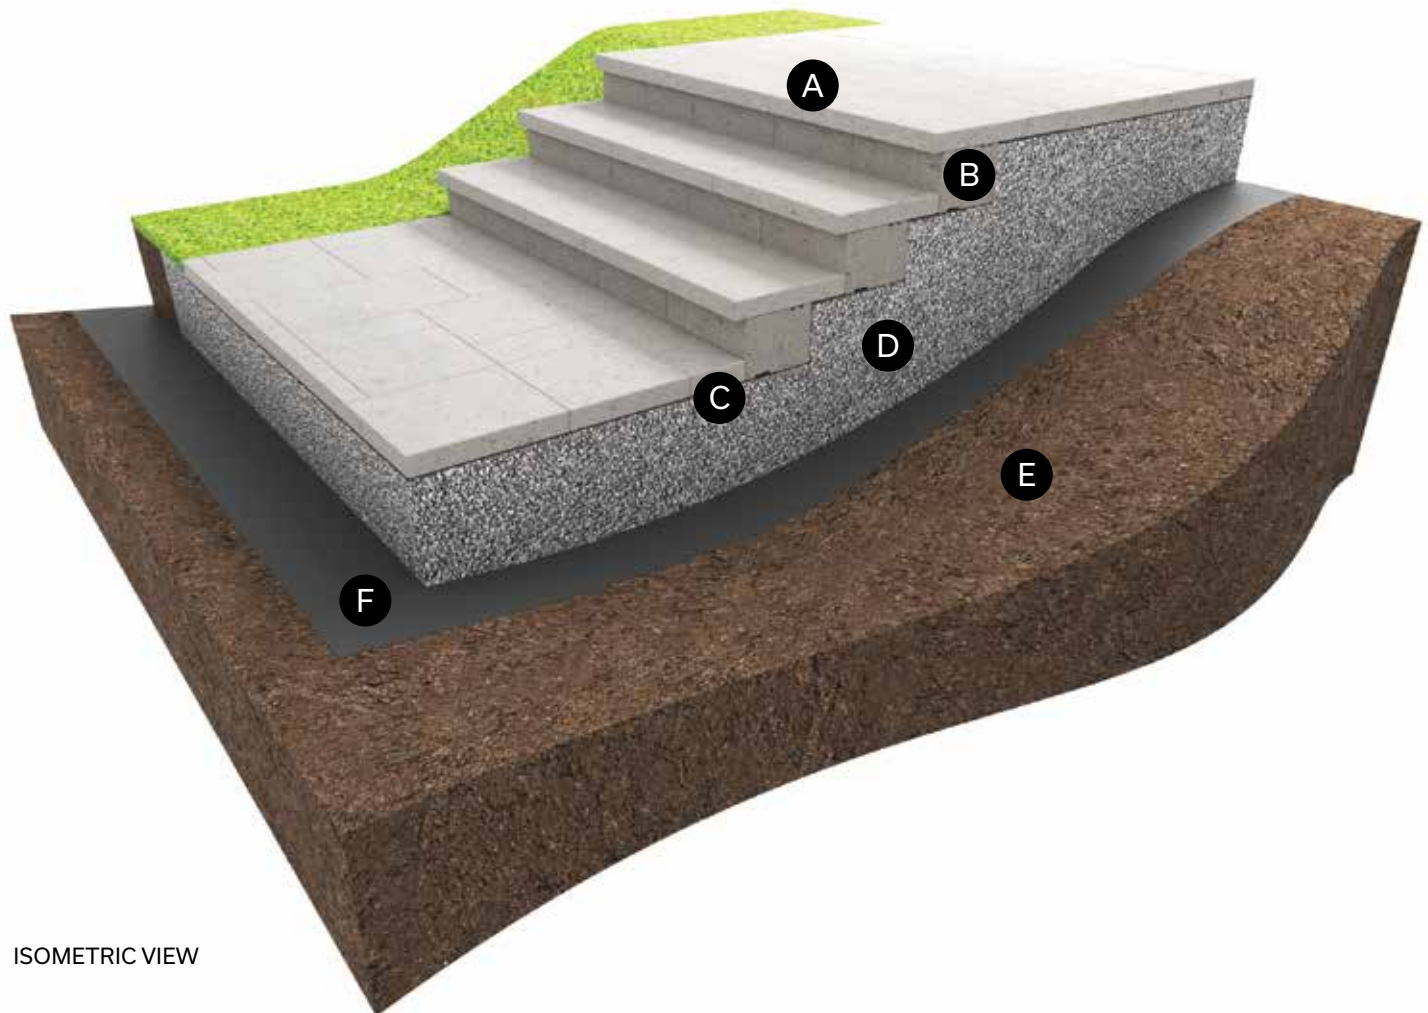

ISOMETRIC VIEW

- A** Melville Plus 60 Step
- B** Vario wall 180 mm
- C** Laying bed: 25 mm - 1 in.
- D** Compacted granular foundation:
0 to 20 mm - 0 to 3/4 in.
Depth: 300 mm - 12 in. minimum
- E** Undisturbed soil
- F** Geotextile membrane

CROSS-SECTION - WALL STEP INSTALLATION

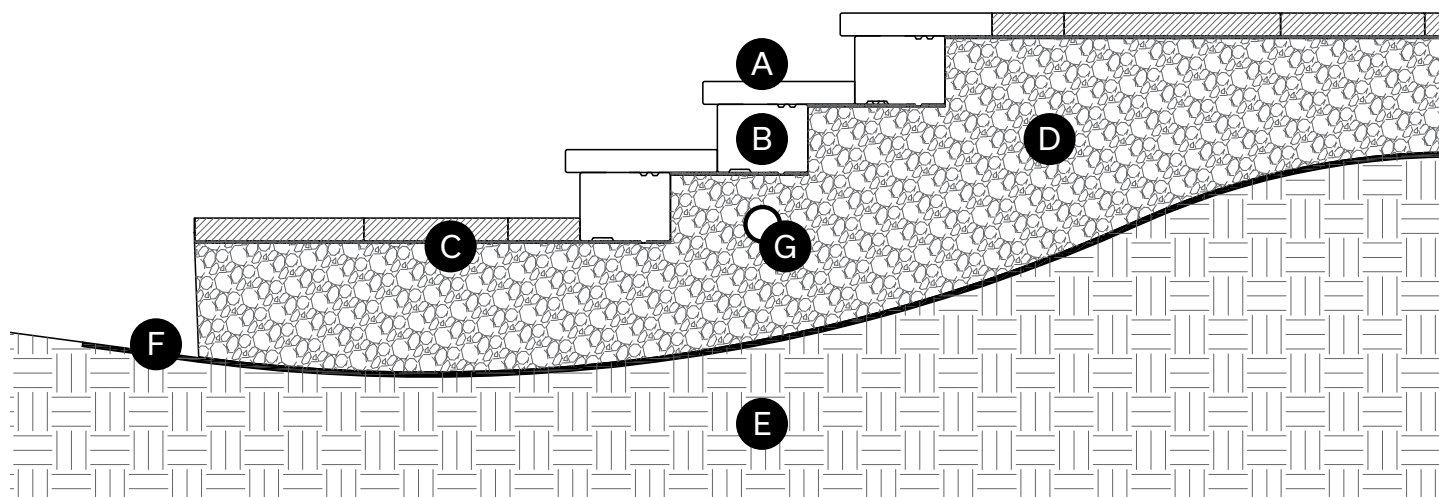

- Ⓐ Melville Plus 60 Step
- Ⓑ Vario wall 180 mm
- Ⓒ Laying bed: 25 mm -1 in.
- Ⓓ Compacted granular foundation:
0 to 20 mm - 0 to 3/4 in.
Depth: 300 mm - 12 in. minimum
- Ⓔ Undisturbed soil
- Ⓕ Geotextile membrane
- Ⓖ Perforated drain connected to services:
100 mm Ø - 4 in.

Vario Wall 180 mm

6 ROW SETBACK WALL – WITH SURCHARGE, NO SLOPE


Vario wall 180 mm installed with a setback and geogrid – 6 rows (total height of 1080 mm or 42 in.). With surcharge behind the wall (5kPa), no slope.

- > Create the setback by installing the groove (female) on the inner tongue (male) of every row
- > Always install with tongue towards the outside of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a geogrid of 1250 mm (50 in.) long over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.
- > You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 6 ROW SETBACK WALL - WITH SURCHARGE, NO SLOPE

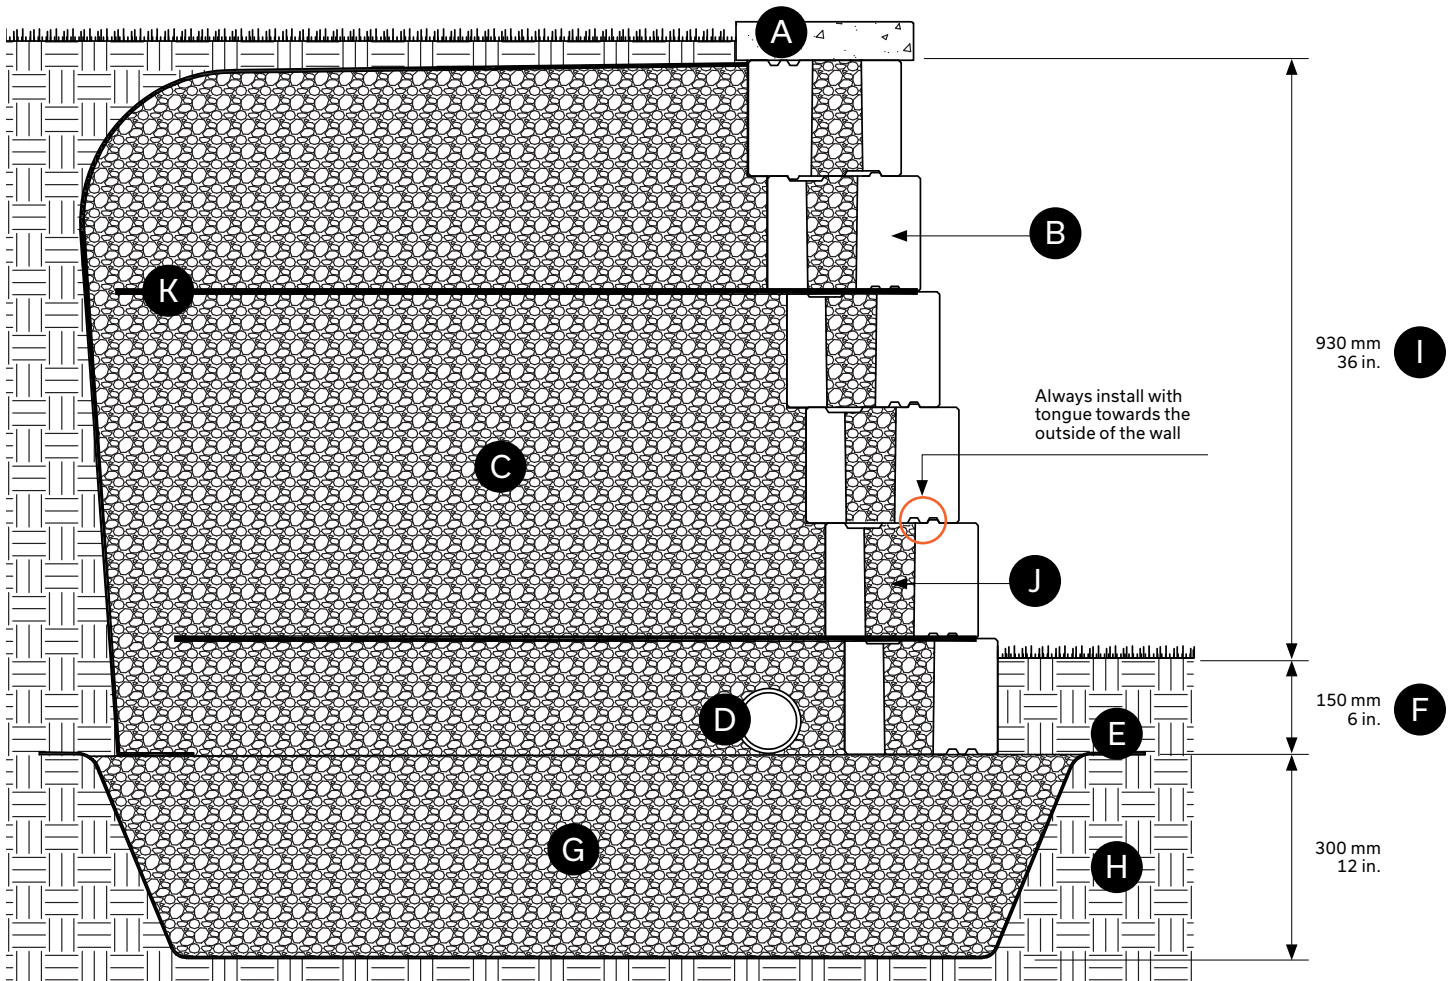

- Ⓐ Capping
- Ⓑ Vario wall 180 mm (setback angle: 9.46 degrees, 150 mm)
- Ⓒ Clean stone 20 mm - 3/4 in. - Depth: 1400 mm - 55 in. min.
- Ⓓ Perforated drain connected to services: 100 mm Ø - 4 in.
- Ⓔ Geotextile membrane
- Ⓕ Minimum buried depth 150 mm - 6 in.
- Ⓖ Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- Ⓗ Undisturbed soil
- Ⓘ Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- Ⓙ Clean stone (in the unit cavities)
- Ⓚ Geogrid 1250 mm - 50 in.

Vario Wall 180 mm

9 ROW SETBACK WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed with a setback and geogrid – 9 rows (total height of 1620 mm or 63 in.). With surcharge behind the wall (5kPa), no slope.


- > Create the setback by installing the outer groove (female) on the tongue (male) at every row
- > Always install with tongue towards the outside of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a geogrid of 1250 mm (50 in.) long over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 9 ROW SETBACK WALL - WITH SURCHARGE, NO SLOPE

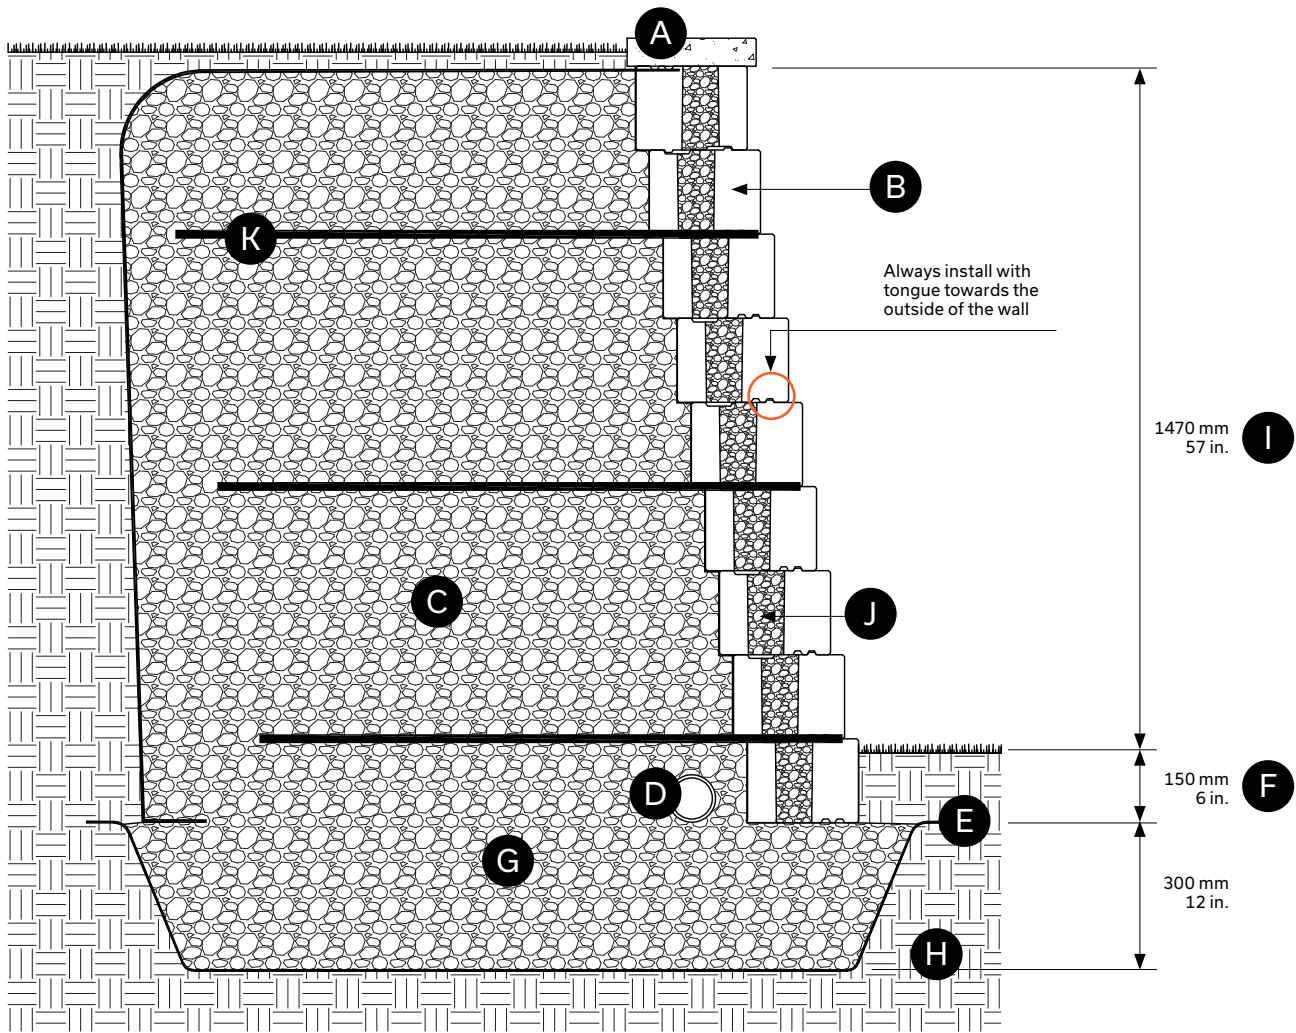

- A Capping
- B Vario wall 180 mm (setback angle: 9.46 degrees, 240 mm)
- C Clean stone 20 mm - 3/4 in. - Depth: 1490 mm - 59 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J Clean stone (in the wall cavities)
- K Geogrid 1250 mm - 50 in.

Vario Wall 180 mm

12 ROW SETBACK WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed with a setback and geogrid – 12 rows (total height of 2160 mm or 84 in.). With surcharge behind the wall (5kPa), no slope.


- > Create the setback by installing the outer groove (female) on the tongue (male) at every row
- > Always install with tongue towards the outside of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a geogrid of 1550 mm (61 in.) long over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 12 ROW SETBACK WALL - WITH SURCHARGE, NO SLOPE

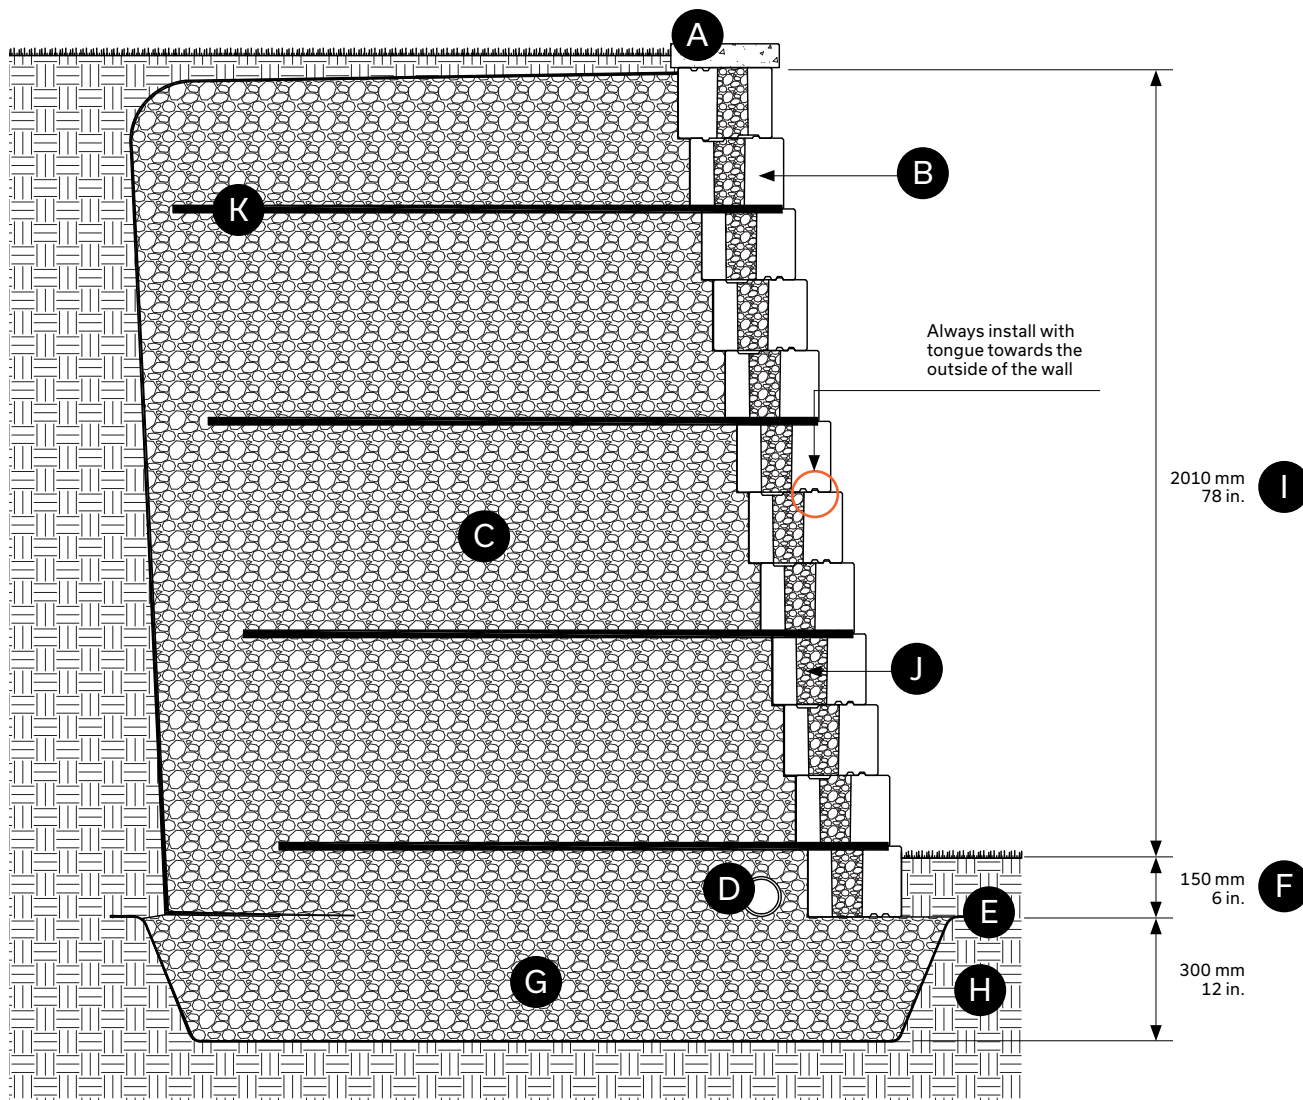

- A** Capping
- B** Vario wall 180 mm (setback angle: 9.46 degrees, 330 mm)
- C** Clean stone 20 mm - 3/4 in. - Depth: 1880 mm - 74 in. min.
- D** Perforated drain connected to services: 100 mm Ø - 4 in.
- E** Geotextile membrane
- F** Minimum buried depth 150 mm - 6 in.
- G** Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H** Undisturbed soil
- I** Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J** Clean stone (in the wall cavities)
- K** Geogrid 1550 mm - 61 in.

Vario Wall 180 mm

15 ROW SETBACK WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed with a setback and geogrid – 15 rows (total height of 2700 mm or 105 in.). With surcharge behind the wall (5kPa), no slope.


- > Create the setback by installing the outer groove (female) on the tongue (male) at every row
- > Always install with tongue towards the outside of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a geogrid of 1885 mm (74 in.) long over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 15 ROW SETBACK WALL - WITH SURCHARGE, NO SLOPE

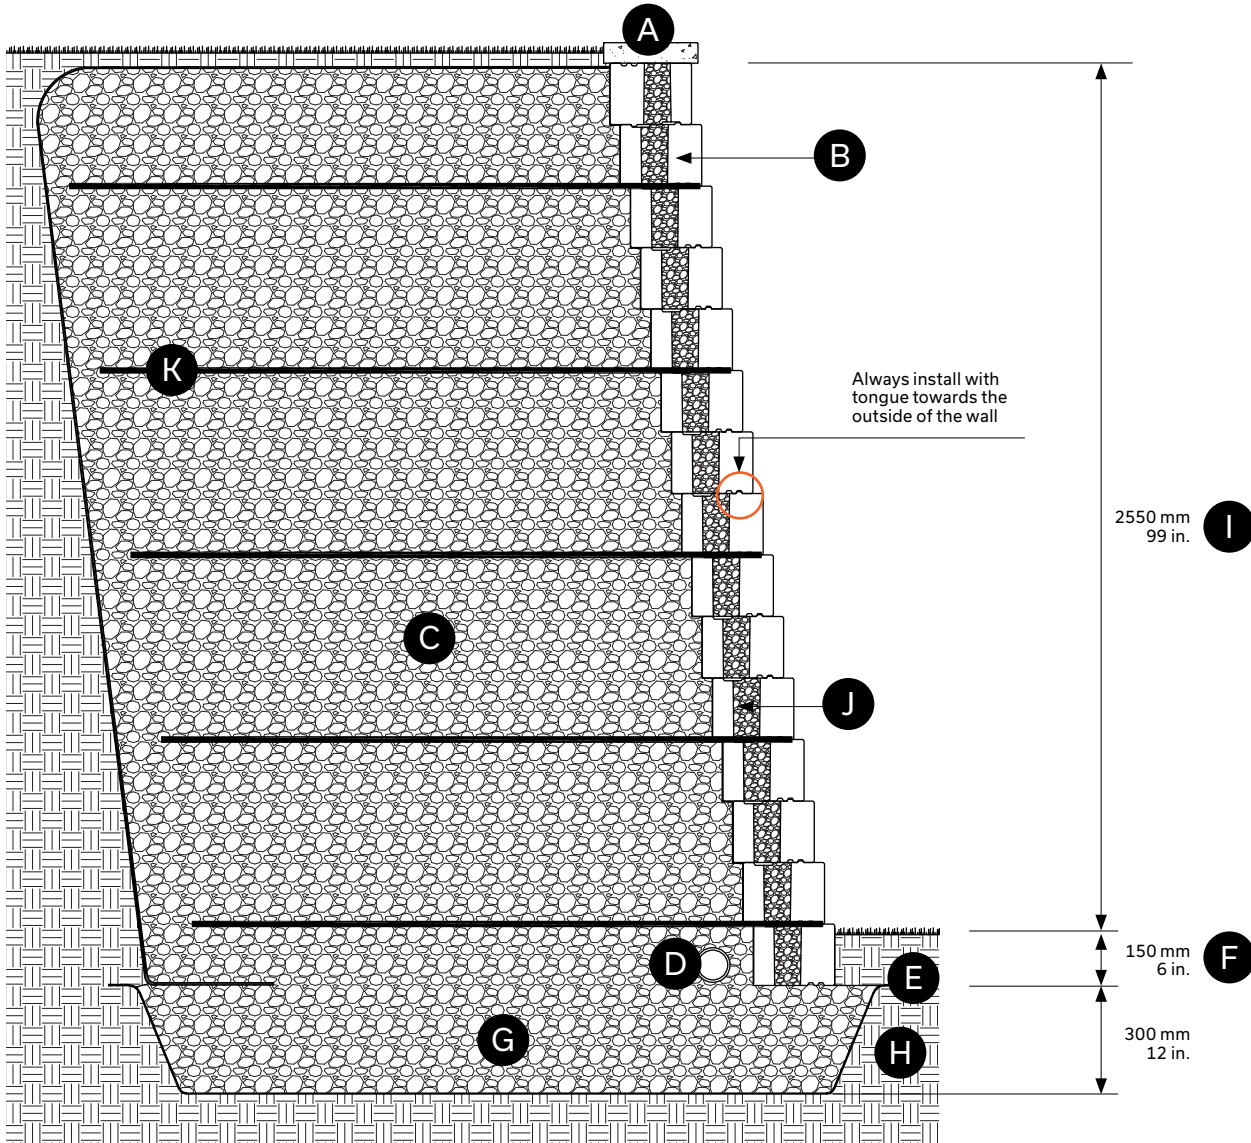

- A Capping
- B Vario wall 180 mm (setback angle: 9.46 degrees, 420 mm)
- C Clean stone 20 mm - 3/4 in. - Depth: 2270 mm - 89 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J Clean stone (in the wall cavities)
- K Geogrid 1885 mm - 74 in.

Vario Wall 180 mm

6 ROW VERTICAL WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed in a vertical application with geogrid – 6 rows (total height of 1080 mm or 42 in). With surcharge (5 kPa), no slope.


- > With surcharge (5 kPa), no slope.
- > Always position the tongue on the outer side of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a 1250 mm long geogrid (50 in.) over the Vario wall unit.
The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 6 ROW VERTICAL WALL - WITH SURCHARGE, NO SLOPE

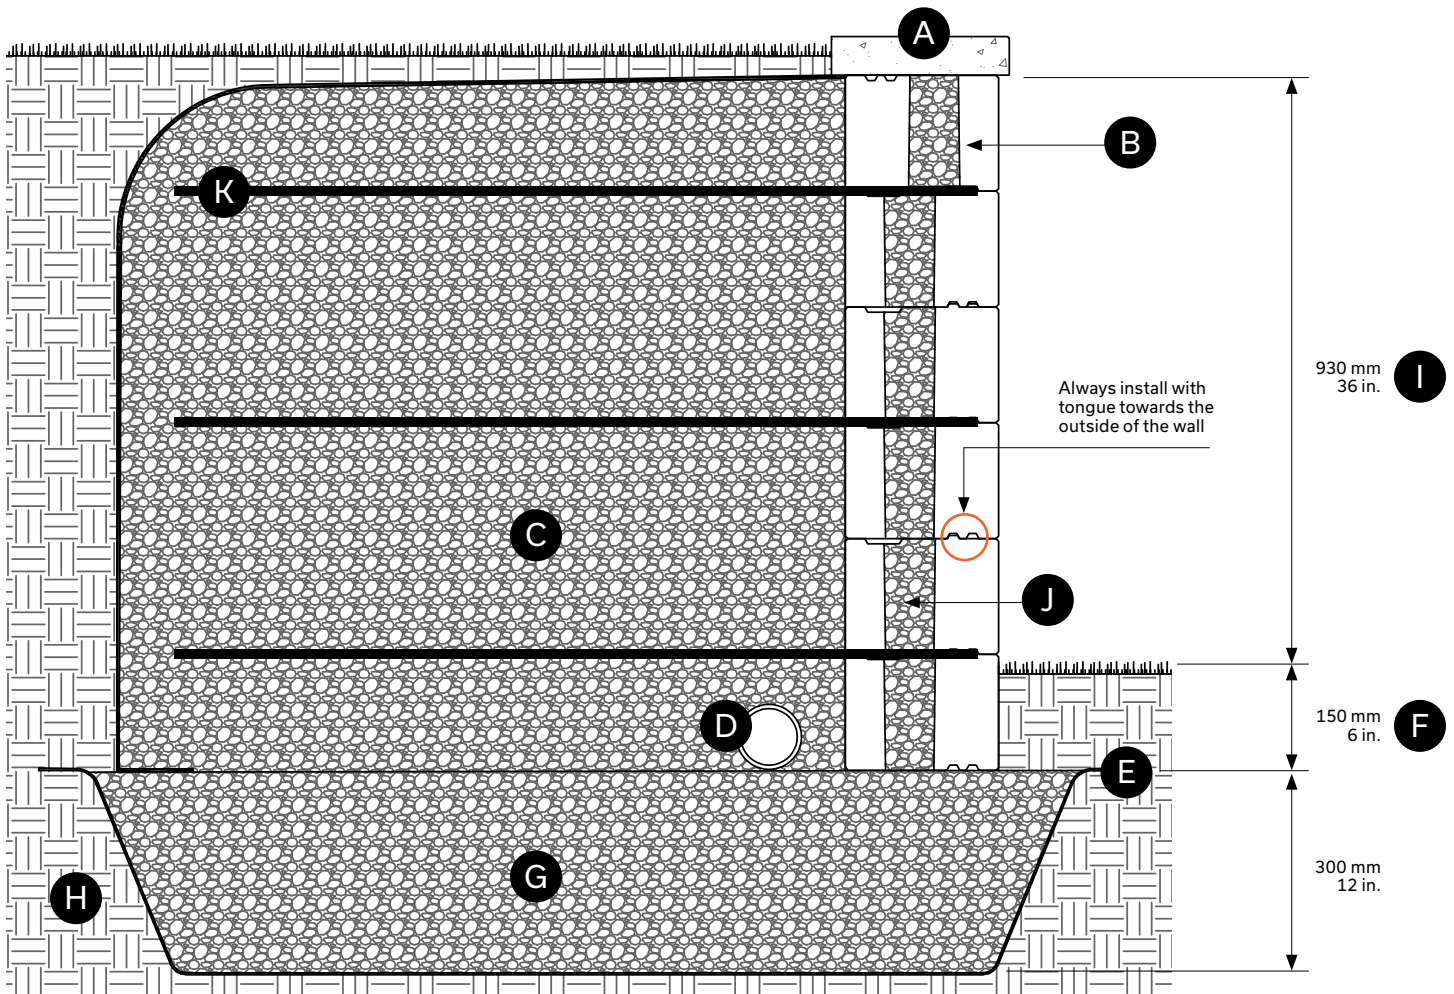

- A** Capping
- B** Vario wall 180 mm
- C** Clean stone 20 mm - 3/4 in. - Depth: 1400 mm - 55 in. min.
- D** Perforated drain connected to services: 100 mm Ø - 4 in.
- E** Geotextile membrane
- F** Minimum buried depth 150 mm - 6 in.
- G** Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H** Undisturbed soil
- I** Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J** Clean stone (in the unit cavities)
- K** Geogrid 1250 mm - 50 in.

Vario Wall 180 mm

9 ROW VERTICAL WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed in a vertical application with geogrid – 9 rows (total height of 1620 mm or 63 in). With surcharge (5 kPa), no slope.


- > Always position the tongue on the outer side of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a 1250 mm long geogrid (50 in.) over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 9 ROW VERTICAL WALL - WITH SURCHARGE, NO SLOPE

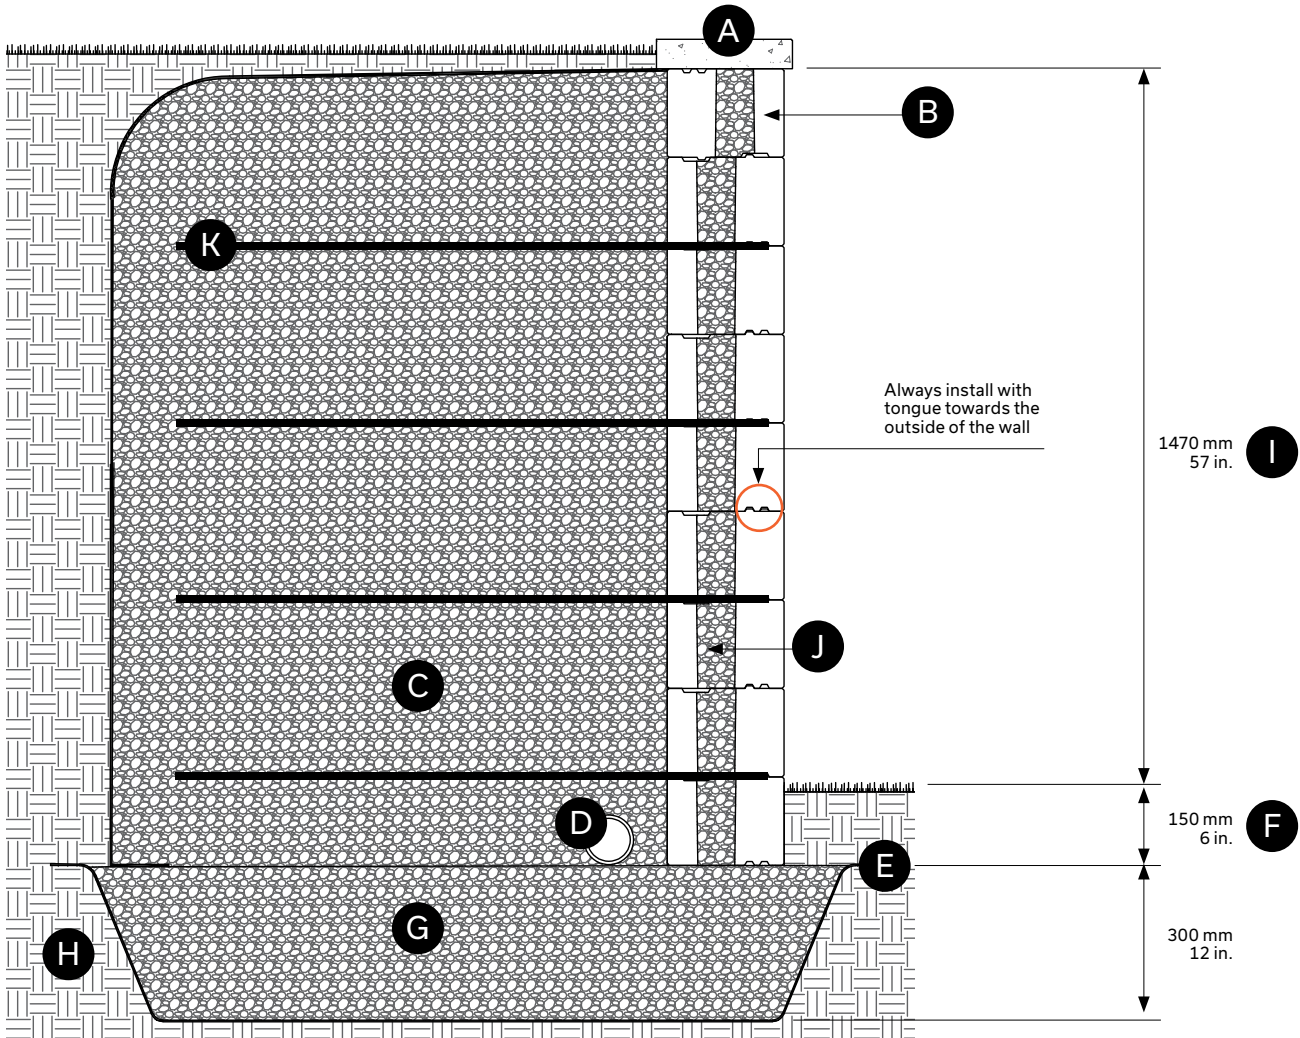

- A Capping
- B Vario wall 180 mm
- C Clean stone 20 mm - 3/4 in. - Depth: 1490 mm - 59 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J Clean stone (in the wall cavities)
- K Geogrid 1250 mm - 50 in.

Vario Wall 180 mm

12 ROW VERTICAL WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed in a vertical application with geogrid – 12 rows (total height of 2160 mm or 84 in). With surcharge (5 kPa), no slope.


- > Always position the tongue on the outer side of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a 1550 mm long geogrid (61 in.) over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 12 ROW VERTICAL WALL - WITH SURCHARGE, NO SLOPE

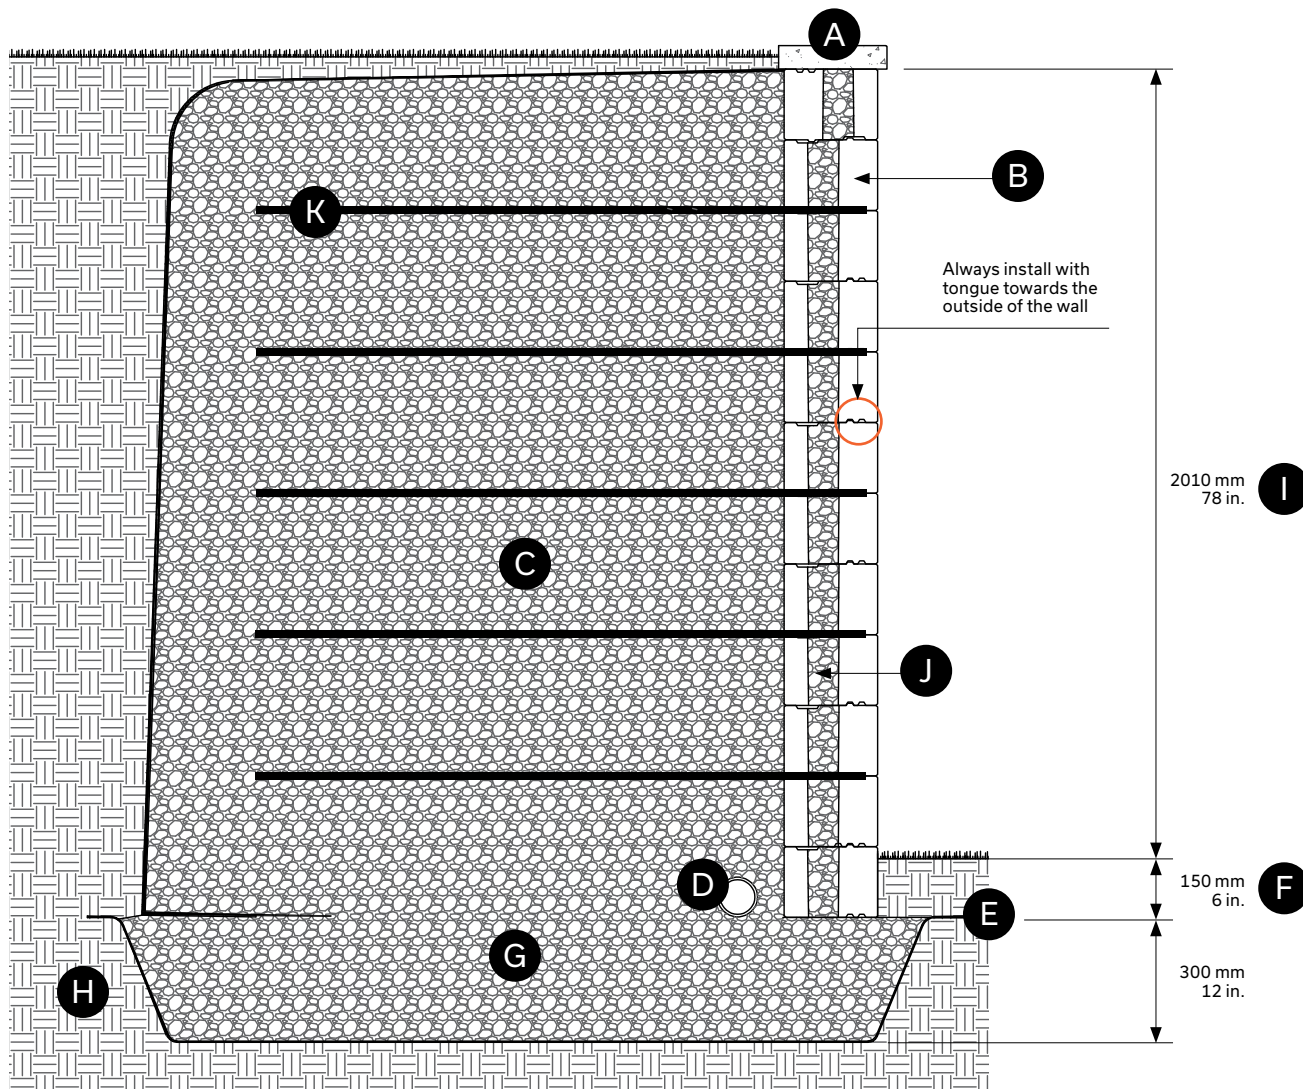

- A** Capping
- B** Vario wall 180 mm
- C** Clean stone 20 mm - 3/4 in. - Depth: 1880 mm - 74 in. min.
- D** Perforated drain connected to services: 100 mm Ø - 4 in.
- E** Geotextile membrane
- F** Minimum buried depth 150 mm - 6 in.
- G** Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H** Undisturbed soil
- I** Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J** Clean stone (in the wall cavities)
- K** Geogrid 1550 mm - 61 in.

Vario Wall 180 mm

15 ROW VERTICAL WALL – WITH SURCHARGE, NO SLOPE

Vario wall 180 mm installed in a vertical application with geogrid
– 15 rows (total height of 2700 mm or 105 in). With surcharge
(5 kPa), no slope.


- > Always position the tongue on the outer side of the wall
- > Fill the cavities of the 180 mm units with clean stone
- > Add a 1885 mm long geogrid (74 in.) over the Vario wall unit. The geogrid is held by the tongue and groove system and the weight of the clean stone. Recommended geogrid: Miragrid 2XT
- > At the very last row, turn the unit upside down to have the tongue downward. Then, use Techniseal concrete adhesive to glue the Permacon capping of your choice.

You don't have to use concrete adhesive between each row of the Vario wall.

Maximum wall heights assume there is a 5kPa surcharge behind the wall and no slope, and that the wall retains sand or gravel [$\phi = 34$ degrees, $\gamma = 19$ kN/m³].

Vario Wall 180 mm

CROSS-SECTION - 15 ROW VERTICAL WALL - WITH SURCHARGE, NO SLOPE

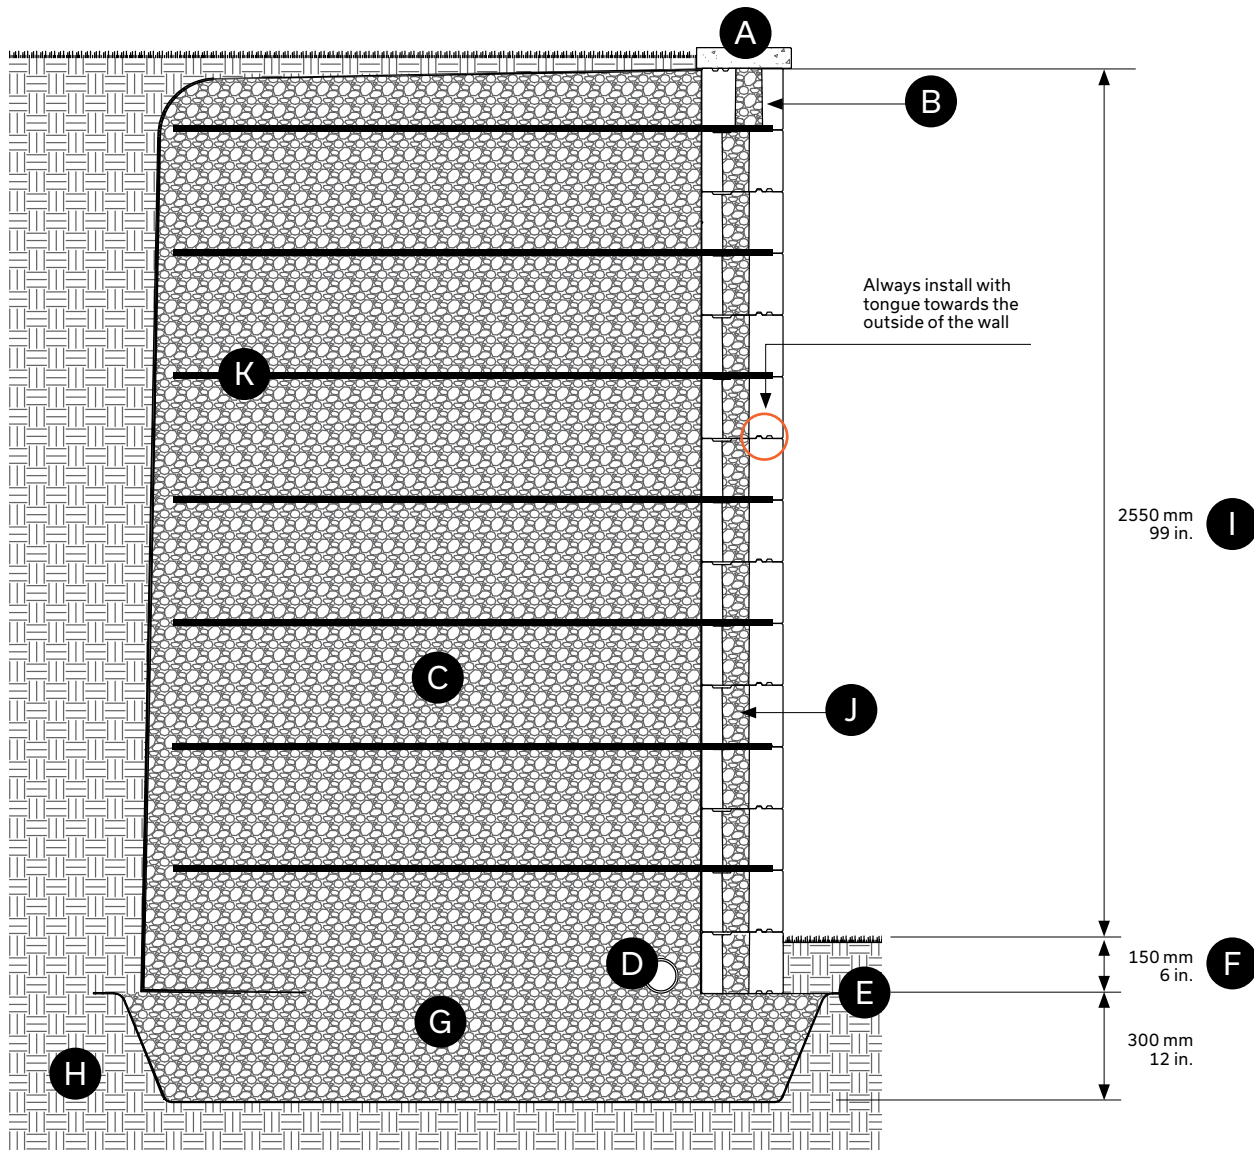

- A Capping
- B Vario wall 180 mm (setback angle: 9.46 degrees, 420 mm)
- C Clean stone 20 mm - 3/4 in. - Depth: 2270 mm - 89 in. min.
- D Perforated drain connected to services: 100 mm Ø - 4 in.
- E Geotextile membrane
- F Minimum buried depth 150 mm - 6 in.
- G Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in. - Depth: 300 mm - 12 in. minimum
- H Undisturbed soil
- I Maximum height with surcharge and no slope behind the wall, excluding the buried units and capping
- J Clean stone (in the wall cavities)
- K Geogrid 1885 mm - 74 in.