


Boulevard 300 Paver

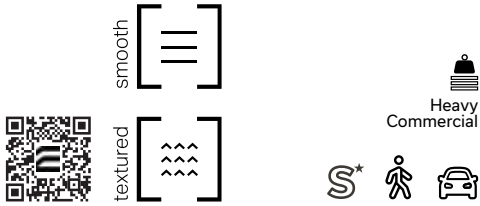


Isse	Colour	
	Smooth	Textured
	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	

Textured	Colour	
	Smooth	Textured
	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	


100 x 300	Dimensions mm		Dimensions in.	
	A	100 x 100 x 300	4 x 4 x 11 13/16	
	Unit/area	33.33 units/m ²	3.05 units/ft ²	
	Cube ft ²	72.33	10.33 per row	

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		




100 x 600 <i>New</i>	Dimensions mm		Dimensions in.	
	J	100 x 100 x 600	4 x 4 x 23 5/8	
	Unit/area	16.67 units/m ²	1.52 units/ft ²	
	Cube ft ²	72.33	10.33 per row	

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		




100 x 450	Dimensions mm		Dimensions in.	
	B	100 x 100 x 450	4 x 4 x 17 3/4	
	Unit/area	22.22 units/m ²	2.06 units/ft ²	
	Cube ft ²	85.28	10.66 per row	
	Cube ft ²	85.28	10.66 per row	
Cube ft ²	63.96	10.66 per row		

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		



150 x 450	Dimensions mm		Dimensions in.	
	C	100 x 150 x 450	4 x 5 7/8 x 17 3/4	
	Unit/area	14.81 units/m ²	1.37 units/ft ²	
	Cube ft ²	81.36	10.17 per row	
	Cube ft ²	81.36	10.17 per row	
Cube ft ²	61.02	10.17 per row		

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		



Boulevard 300 Paver - cont'd

150 x 150




	Dimensions mm	Dimensions in.
D	100 x 150 x 150	4 x 5 7/8 x 5 7/8
Unit/area	44.44 units/m ²	4.12 units/ft ²
Cube ft ²	81.36	10.17 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
E	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 300




	Dimensions mm	Dimensions in.
F	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



200 x 600




	Dimensions mm	Dimensions in.
G	100 x 200 x 600	4 x 7 7/8 x 23 5/8
Unit/area	8.33 units/m ²	0.77 unit/ft ²
Cube ft ²	72.31	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 600




	Dimensions mm	Dimensions in.
H	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	5.55 units/m ²	0.52 unit/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



600 x 600



	Dimensions mm	Dimensions in.
I	100 x 600 x 600	4 x 23 5/8 x 23 5/8
Unit/area	2.77 units/m ²	0.26 unit/ft ²
Cube ft ²	46.5	7.75 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Mass/ft ²	23.63 kg	51.99 lb
----------------------	----------	----------

Mass/ft ²	28.83 kg	63.40 lb
----------------------	----------	----------


Sold separately

Typical Row




Boulevard 300 Paver - cont'd


Laying Patterns




Linear




Linear modifié
25% F + 75% G




Modular
12% C + 21% D + 67% E




Modular
50% C + 50% D




Modular
33% C + 67% D




Modular
11% C + 89% E




Modular
33% C + 67% E




Modular
11 D + 89 E




Modular
8% C + 25% D + 67% E




Modular
5% C + 24% D + 71% E




Modular
10% C + 10% D + 80% E




Modular
8% C + 10% D + 80% E



Modular
12% C + 38% D + 50% E



Checkerboard modifié
60% E + 40% F




Herringbone
100% A or 100% B

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 300 Paver							
100 x 300							
100 x 600							
100 x 450							
150 x 450	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
150 x 150							
150 x 300							
300 x 300							
200 x 600							
300 x 600							
600 x 600							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard 500 Paver

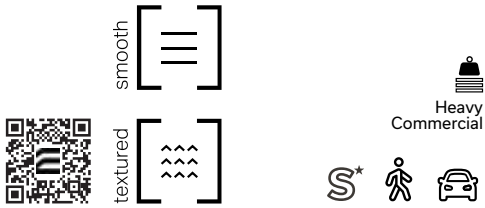


Finish	Colour	
	mm	in.
[Smooth]	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	

Finish	Colour	
	mm	in.
[Textured]	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	

500 x 500	Dimensions mm		Dimensions in.	
	mm	in.	mm	in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16		
Unit/area	4 units/m ²	0.37 units/ft ²		
Cube ft ²	64.5	10.75 per row		


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb



Sold separately

500 x 500 1/2 Pattern	Dimensions mm		Dimensions in.	
	mm	in.	mm	in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16		
Unit/area	4 units/m ²	0.37 units/ft ²		
Cube ft ²	64.5	10.75 per row		


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb



Sold separately

500 x 500 1/4 Pattern	Dimensions mm		Dimensions in.	
	mm	in.	mm	in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16		
Unit/area	4 units/m ²	0.37 units/ft ²		
Cube ft ²	64.5	10.75 per row		

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb



Sold separately

Architectural Landscaping

Boulevard 500 Paver - cont'd

500 x 500
Motif 1/16




	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ²	64.5	10.75 per row


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately


Typical Row




Laying Patterns




Linear




Linear




Linear




Checkerboard




Checkerboard



Checkerboard



Checkerboard




Checkerboard

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 500 Paver							
500 x 500							
500 x 500 - 1/2 pattern	CSA A231.2	N/A	μ 50 MPa	225 g/m ² after 28 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
500 x 500 - 1/4 pattern			≥ 45 MPa	500 g/m ² after 49 cycles			Width: -1.0 to +2.0 mm
500 x 500 - 1/16 pattern							Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Drain Paver



ASTM #8 Aggregate
jointing material



Heavy
Commercial




isse []	Colour	
	Smooth	Textured
[]	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	

textured []	Colour	
	Smooth	Textured
[]	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	




209 x 209	Dimensions mm		Dimensions in.	
		100 x 209 x 209	4 x 8 1/4 x 8 1/4	
	Unit/area	22.9 units/m ²	2.13 units/ft ²	
	Cube ft ³	56.4	9.4 per row	

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb



150 x 300 <i>New</i>	Dimensions mm		Dimensions in.	
		100 x 150 x 300	4 x 5 7/8 x 11 13/16	
	Unit/area	22.22 units/m ²	2.06 units/ft ²	
	Cube ft ³	69.78	11.63 per row	

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

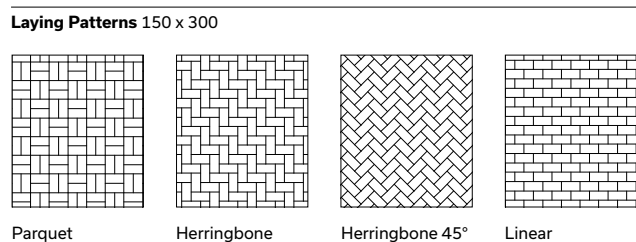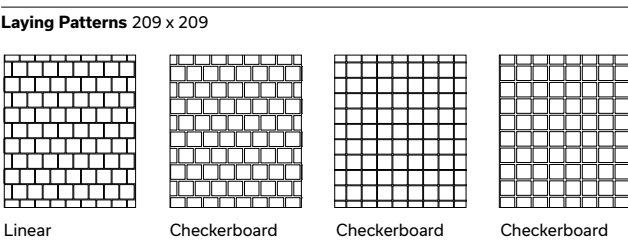


TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Drain Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Boulevard Drain 209 x 209: Joint spacing is 12 mm (0.47 in.) which allows an initial surface infiltration rate of +/-17 387mm/hr. / Boulevard Drain 150 x 300: Joint spacing is 12 mm (0.47 in.)

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Verde Paver



Light Commercial




Colour

White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth




	Dimensions mm	Dimensions in.
	100 x 300 x 450	4 x 11 13/16 x 17 3/4
Weight/unit	15 kg	33 lb
Unit/area	7.36 units/m ²	0.68 units/ft ²
Area/layer	1.09 m ²	11.72 ft ²
Area/cube	8.72 m²	93.76 ft²
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	28.80 lin. m	94.48 lin. ft
Qty/cube	64 units	64 units
Weight/cube	992 kg	2186 lb

Typical Row



Laying Pattern



Linear

TECHNICAL INFORMATION


Product	Standard	Void Opening	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Verde Paver	CSA A231.2	50%	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Striated Paver




Colour
Cinder Grey - Granitech
Light Charcoal - Granitech
Charcoal - Granitech
Light Grey - Granitech
Beige Grey - Granitech
Beige - Granitech
Opal White - Granitech
Stanstead Grey - Granitech
Shefford Beige - Granitech
Cambrian Brown - Granitech
Cambrian Black - Granitech



	Dimensions mm	Dimensions in.
	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ³	69.78	11.63 per row
Mass/ft ²	22.33 kg	49.13 lb

Typical Row



TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Striated Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.