



Boulevard Drain Paver



ASTM #8 Aggregate
jointing material



Heavy
Commercial




Isse	[]	Colour
		White - Smooth
		Cinder Grey - Smooth
		Charcoal - Smooth
		Light Charcoal - Smooth
		Black ETX - Smooth
		Light Grey - Smooth
		Beige Grey - Smooth
		Beige - Smooth

Textured	[]	Colour
		Cinder Grey - Granitech
		Light Charcoal - Granitech
		Charcoal - Granitech
		Light Grey - Granitech
		Beige Grey - Granitech
		Beige - Granitech
		Opal White - Granitech
		Stanstead Grey - Granitech
		Cambrian Brown - Granitech
		Cambrian Black - Granitech

209 x 209		Dimensions mm	Dimensions in.	
		100 x 209 x 209	4 x 8 1/4 x 8 1/4	
		Unit/area	22.9 units/m ²	2.13 units/ft ²
		Cube ft ³	56.4	9.4 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb


Sold separately




150 x 300 <i>New</i>		Dimensions mm	Dimensions in.	
		100 x 150 x 300	4 x 5 7/8 x 11 13/16	
		Unit/area	22.22 units/m ²	2.06 units/ft ²
		Cube ft ³	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately




Laying Patterns 209 x 209

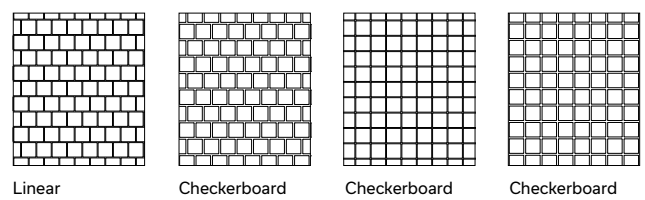

Linear Checkerboard Checkerboard Checkerboard

Laying Patterns 150 x 300

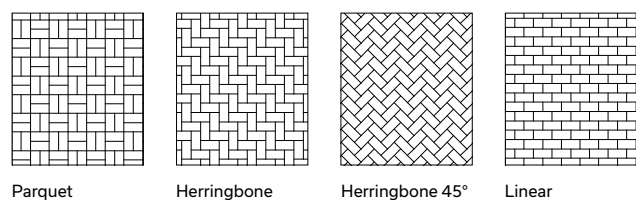

Parquet Herringbone Herringbone 45° Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Drain Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Boulevard Drain 209 x 209: Joint spacing is 12 mm (0.47 in.) which allows an initial surface infiltration rate of +/-17 387mm/hr. / Boulevard Drain 150 x 300: Joint spacing is 12 mm (0.47 in.)

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.