


Boulevard 300 Paver

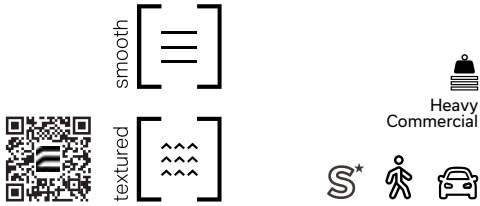


Isse	Colour	
	Smooth	Textured
[Smooth Icon]	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	

Textured	Colour	
	Smooth	Textured
[Textured Icon]	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	


100 x 300	Dimensions mm		Dimensions in.	
	A	100 x 100 x 300	4 x 4 x 11 13/16	
	Unit/area	33.33 units/m ²	3.05 units/ft ²	
	Cube ft ²	72.33	10.33 per row	

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		




100 x 600 <i>New</i>	Dimensions mm		Dimensions in.	
	J	100 x 100 x 600	4 x 4 x 23 5/8	
	Unit/area	16.67 units/m ²	1.52 units/ft ²	
	Cube ft ²	72.33	10.33 per row	

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		




100 x 450	Dimensions mm		Dimensions in.	
	B	100 x 100 x 450	4 x 4 x 17 3/4	
	Unit/area	22.22 units/m ²	2.06 units/ft ²	
	Cube ft ²	85.28	10.66 per row	
	Cube ft ²	85.28	10.66 per row	

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		



150 x 450	Dimensions mm		Dimensions in.	
	C	100 x 150 x 450	4 x 5 7/8 x 17 3/4	
	Unit/area	14.81 units/m ²	1.37 units/ft ²	
	Cube ft ²	81.36	10.17 per row	
	Cube ft ²	81.36	10.17 per row	

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		



Boulevard 300 Paver - cont'd

150 x 150




	Dimensions mm	Dimensions in.
D	100 x 150 x 150	4 x 5 7/8 x 5 7/8
Unit/area	44.44 units/m ²	4.12 units/ft ²
Cube ft ²	81.36	10.17 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
E	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 300




	Dimensions mm	Dimensions in.
F	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



200 x 600




	Dimensions mm	Dimensions in.
G	100 x 200 x 600	4 x 7 7/8 x 23 5/8
Unit/area	8.33 units/m ²	0.77 unit/ft ²
Cube ft ²	72.31	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 600




	Dimensions mm	Dimensions in.
H	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	5.55 units/m ²	0.52 unit/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



600 x 600



	Dimensions mm	Dimensions in.
I	100 x 600 x 600	4 x 23 5/8 x 23 5/8
Unit/area	2.77 units/m ²	0.26 unit/ft ²
Cube ft ²	46.5	7.75 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Mass/ft ²	23.63 kg	51.99 lb
----------------------	----------	----------

Mass/ft ²	28.83 kg	63.40 lb
----------------------	----------	----------


Sold separately

Typical Row




Boulevard 300 Paver - cont'd


Laying Patterns




Linear




Linear modifié
25% F + 75% G




Modular
12% C + 21% D + 67% E




Modular
50% C + 50% D




Modular
33% C + 67% D




Modular
11% C + 89% E




Modular
33% C + 67% E




Modular
11 D + 89 E




Modular
8% C + 25% D + 67% E




Modular
5% C + 24% D + 71% E




Modular
10% C + 10% D + 80% E




Modular
8% C + 10% D + 80% E



Modular
12% C + 38% D + 50% E



Checkerboard modifié
60% E + 40% F




Herringbone
100% A or 100% B

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 300 Paver							
100 x 300							
100 x 600							
100 x 450							
150 x 450	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
150 x 150							
150 x 300							
300 x 300							
200 x 600							
300 x 600							
600 x 600							


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard 500 Paver

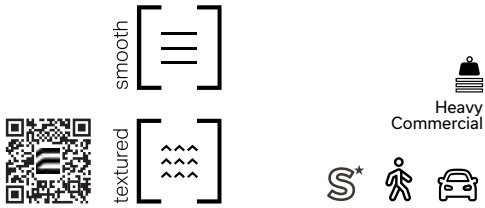

is	Colour
[]	White - Smooth
[]	Cinder Grey - Smooth
[]	Charcoal - Smooth
[]	Light Charcoal - Smooth
[]	Black ETX - Smooth
[]	Light Grey - Smooth
[]	Beige Grey - Smooth
[]	Beige - Smooth


te	Colour
[]	Cinder Grey - Granitech
[]	Light Charcoal - Granitech
[]	Charcoal - Granitech
[]	Light Grey - Granitech
[]	Beige Grey - Granitech
[]	Beige - Granitech
[]	Opal White - Granitech
[]	Stanstead Grey - Granitech
[]	Cambrian Brown - Granitech
[]	Cambrian Black - Granitech


500 x 500	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ²	64.5	10.75 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row





500 x 500 1/2 Pattern	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ²	64.5	10.75 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row




500 x 500 1/4 Pattern	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ²	64.5	10.75 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



Boulevard 500 Paver - cont'd

500 x 500
Motif 1/16




	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ²	64.5	10.75 per row


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately


Typical Row




Laying Patterns




Linear




Linear




Linear




Checkerboard




Checkerboard



Checkerboard



Checkerboard




Checkerboard

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 500 Paver							
500 x 500							Length: -1.0 to +2.0 mm
500 x 500 - 1/2 pattern	CSA A231.2	N/A	μ 50 MPa	225 g/m ² after 28 cycles	N/A	N/A	Width: -1.0 to +2.0 mm
500 x 500 - 1/4 pattern			≥ 45 MPa	500 g/m ² after 49 cycles			Height: ±3.0 mm
500 x 500 - 1/16 pattern							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Drain Paver



ASTM #8 Aggregate
jointing material




Heavy
Commercial




Isse	[]	Colour	
		Finish	Colour
	[]	Smooth	White - Smooth
	[]	Smooth	Cinder Grey - Smooth
	[]	Smooth	Charcoal - Smooth
	[]	Smooth	Light Charcoal - Smooth
	[]	Smooth	Black ETX - Smooth
	[]	Smooth	Light Grey - Smooth
	[]	Smooth	Beige Grey - Smooth
	[]	Smooth	Beige - Smooth

Isse	[]	Colour	
		Finish	Colour
	[]	Granitech	Cinder Grey - Granitech
	[]	Granitech	Light Charcoal - Granitech
	[]	Granitech	Charcoal - Granitech
	[]	Granitech	Light Grey - Granitech
	[]	Granitech	Beige Grey - Granitech
	[]	Granitech	Beige - Granitech
	[]	Granitech	Opal White - Granitech
	[]	Granitech	Stanstead Grey - Granitech
	[]	Granitech	Cambrian Brown - Granitech
	[]	Granitech	Cambrian Black - Granitech

209 x 209	Dimensions mm		Dimensions in.	
		100 x 209 x 209	4 x 8 1/4 x 8 1/4	
	Unit/area	22.9 units/m ²	2.13 units/ft ²	
	Cube ft ³	56.4	9.4 per row	



Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb




Sold separately

150 x 300	Dimensions mm		Dimensions in.	
		100 x 150 x 300	4 x 5 7/8 x 11 13/16	
	Unit/area	22.22 units/m ²	2.06 units/ft ²	
	Cube ft ³	69.78	11.63 per row	


New

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------




Sold separately

Laying Patterns 209 x 209

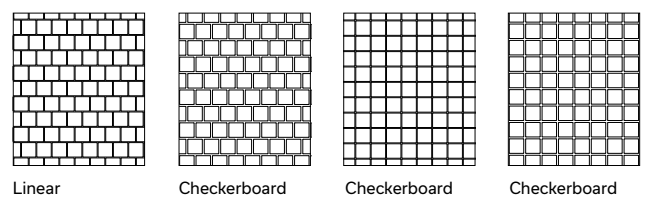

Linear Checkerboard Checkerboard Checkerboard

Laying Patterns 150 x 300

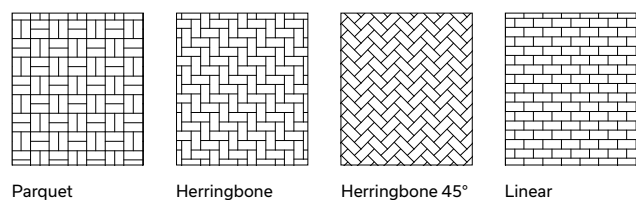

Parquet Herringbone Herringbone 45° Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Drain Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Boulevard Drain 209 x 209: Joint spacing is 12 mm (0.47 in.) which allows an initial surface infiltration rate of +/-17 387mm/hr. / Boulevard Drain 150 x 300: Joint spacing is 12 mm (0.47 in.)

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Verde Paver



smooth []



Light Commercial




[] isse	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth




	Dimensions mm	Dimensions in.
	100 x 300 x 450	4 x 11 13/16 x 17 3/4
Weight/unit	15 kg	33 lb
Unit/area	7.36 units/m ²	0.68 units/ft ²
Area/layer	1.09 m ²	11.72 ft ²
Area/cube	8.72 m²	93.76 ft²
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	28.80 lin. m	94.48 lin. ft
Qty/cube	64 units	64 units
Weight/cube	992 kg	2186 lb

Typical Row



Laying Pattern



Checkerboard

TECHNICAL INFORMATION

Product	Standard	Void Opening	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Verde Paver	CSA A231.2	50%	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.


Boulevard Striated Paver



Colour




Cinder Grey - Granitech
Light Charcoal - Granitech
Charcoal - Granitech
Light Grey - Granitech
Beige Grey - Granitech
Beige - Granitech
Opal White - Granitech
Stanstead Grey - Granitech
Shefford Beige - Granitech
Cambrian Brown - Granitech
Cambrian Black - Granitech



	Dimensions mm	Dimensions in.
	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ³	69.78	11.63 per row
Mass/ft ²	22.33 kg	49.13 lb

Typical Row



TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Striated Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.