


Boulevard TLI 90 Crescendo 320 Paver



Finish	Colour
	White - Smooth
Isse	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth


Finish	Colour
	Cinder Grey - Granitech
textured	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

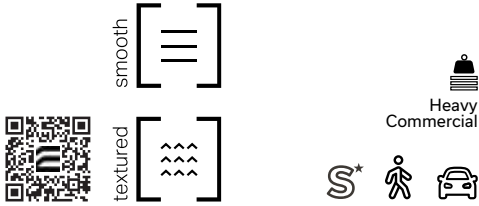


	Dimensions mm	Dimensions in.
A	90 x 320 x 240	3 1/2 x 12 5/8 x 9 1/2
B	90 x 320 x 320	3 1/2 x 12 5/8 x 12 5/8
C	90 x 320 x 360	3 1/2 x 12 5/8 x 14 3/16
D	90 x 320 x 400	3 1/2 x 12 5/8 x 15 3/4
E	90 x 320 x 440	3 1/2 x 12 5/8 x 17 5/16
Cube ft ²	86.8	12.4 per row

Mass/ft ²	19.36 kg	42.6 lb
Mass/ft ²	20.65 kg	45.4 lb
Mass/ft ²	25.55 kg	56.2 lb


Sold separately




Laying Patterns



Linear



Linear
50% ABCDE + 50%
Large Rectangle




Linear
Small Rectangle

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 90 Crescendo 320 Paver							
320 x 240							
320 x 320	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
320 x 360							
320 x 400							
320 x 440							


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 100 Crescendo 300 Paver



Heavy Commercial


	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth




	Dimensions mm	Dimensions in.
A	100 x 300 x 400	4 x 11 13/16 x 15 3/4
B	100 x 300 x 500	4 x 11 13/16 x 19 11/16
C	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	22.8 kg	50.16 lb
Cube ft ²	77.52	9.69 per row

Mass/ft ²	22.8 kg	50.16 lb
Units are not sold separately		


Typical Row




Laying Patterns



Linear



Linear
70% ABC + 30% D




Linear
100% D


TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 100 Crescendo 300 Paver							
300 x 400	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
300 x 500							Width: -1.0 to +2.0 mm
300 x 600							Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 150 Crescendo 125 Paver

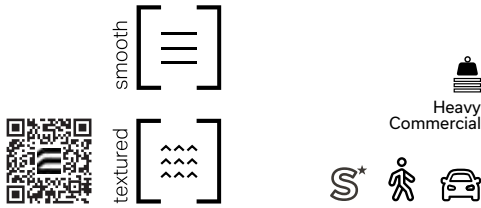

	Colour	
	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
Beige - Smooth		


	Colour	
	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
Cambrian Black - Granitech		

		Dimensions mm	Dimensions in.
A	A	150 x 125 x 333.33	5 7/8 x 4 15/16 x 13 1/8
B	B	150 x 125 x 416.67	5 7/8 x 4 15/16 x 16 3/8
C	C	150 x 125 x 458.33	5 7/8 x 4 15/16 x 18
D	D	150 x 125 x 500	5 7/8 x 4 15/16 x 19 11/16
E	E	150 x 125 x 541.67	5 7/8 x 4 15/16 x 21 5/16
F	F	150 x 125 x 583.33	5 7/8 x 4 15/16 x 23
	Cube ft ²	53.80	10.76 per row
	Cube ft ²	53.80	10.76 per row
	Cube ft ²	43.04	10.76 per row


Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Units are not sold separately

Typical Row



Laying Pattern




Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 125 Paver 125 x 333.33 125 x 416.67 125 x 458.33 125 x 500 125 x 541.67 125 x 583.33	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 150 Crescendo 320 Paver

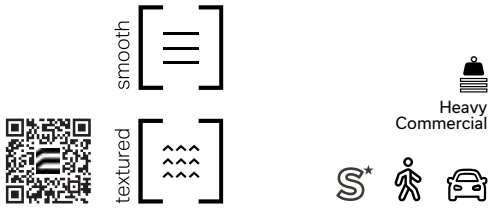


Isse	[]	Colour
		White - Smooth Cinder Grey - Smooth Charcoal - Smooth Light Charcoal - Smooth Black ETX - Smooth Light Grey - Smooth Beige Grey - Smooth Beige - Smooth

textured	[]	Colour
		Cinder Grey - Granitech Light Charcoal - Granitech Charcoal - Granitech Light Grey - Granitech Beige Grey - Granitech Beige - Granitech Opal White - Granitech Stanstead Grey - Granitech Cambrian Brown - Granitech Cambrian Black - Granitech


		Dimensions mm	Dimensions in.
A		150 x 320 x 240	5 7/8 x 12 5/8 x 9 1/2
B		150 x 320 x 320	5 7/8 x 12 5/8 x 12 5/8
C		150 x 320 x 360	5 7/8 x 12 5/8 x 14 3/16
D		150 x 320 x 400	5 7/8 x 12 5/8 x 15 3/4
E		150 x 320 x 440	5 7/8 x 12 5/8 x 17 5/16
	Cube ft ²	49.6	12.4 per row
	Cube ft ²	49.6	12.4 per row
	Cube ft ²	37.2	1.4 per row

Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Units are not sold separately



Laying Pattern




Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 320 Paver							
125 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
250 x 500							Width: -1.0 to +2.0 mm
500 x 500							Height: ±3.0 mm
750 x 500							
200 x 200							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 200 Crescendo 300 Paver

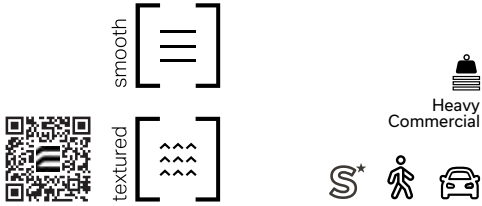

Isse	[]	Colour
		White - Smooth
		Cinder Grey - Smooth
		Charcoal - Smooth
		Light Charcoal - Smooth
		Black ETX - Smooth
		Light Grey - Smooth
		Beige Grey - Smooth
		Beige - Smooth


textured	[]	Colour
		Cinder Grey - Granitech
		Light Charcoal - Granitech
		Charcoal - Granitech
		Light Grey - Granitech
		Beige Grey - Granitech
		Beige - Granitech
		Opal White - Granitech
		Stanstead Grey - Granitech
		Cambrian Brown - Granitech
		Cambrian Black - Granitech

	Dimensions mm	Dimensions in.
A	200 x 300 x 300	7 7/8 x 11 13/16 x 11 13/16
B	200 x 300 x 412.5	7 7/8 x 11 13/16 x 16 1/4
C	200 x 300 x 487.5	7 7/8 x 11 13/16 x 19 3/16
D	200 x 300 x 525	7 7/8 x 11 13/16 x 20 5/8
E	200 x 300 x 562.5	7 7/8 x 11 13/16 x 22 1/8
F	200 x 300 x 637.5	7 7/8 x 11 13/16 x 25 1/8
G	200 x 300 x 675	7 7/8 x 11 13/16 x 26 9/16
Unit/area	16 units/m ²	1.49 units/ft ²
Cube ft ²	46.52	11.63 per row


Mass/ft ²	43.24 kg	95.12 lb
Mass/ft ²	45.64 kg	100.40 lb
Mass/ft ²	58.14 kg	127.90 lb

Units are not sold separately

Typical Row



Laying Pattern



Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 200 Crescendo 300 Paver 300 x 300 300 x 412.5 300 x 487.5 300 x 525 300 x 562.5 300 x 637.5 300 x 675	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.