


Boulevard TLI 90 Crescendo 320 Paver



smooth	Colour	
	[Smooth Icon]	White - Smooth
	[Smooth Icon]	Cinder Grey - Smooth
	[Smooth Icon]	Charcoal - Smooth
	[Smooth Icon]	Light Charcoal - Smooth
	[Smooth Icon]	Black ETX - Smooth
	[Smooth Icon]	Light Grey - Smooth
	[Smooth Icon]	Beige Grey - Smooth
	[Smooth Icon]	Beige - Smooth


textured	Colour	
	[Textured Icon]	Cinder Grey - Granitech
	[Textured Icon]	Light Charcoal - Granitech
	[Textured Icon]	Charcoal - Granitech
	[Textured Icon]	Light Grey - Granitech
	[Textured Icon]	Beige Grey - Granitech
	[Textured Icon]	Beige - Granitech
	[Textured Icon]	Opal White - Granitech
	[Textured Icon]	Stanstead Grey - Granitech
	[Textured Icon]	Cambrian Brown - Granitech
[Textured Icon]	Cambrian Black - Granitech	

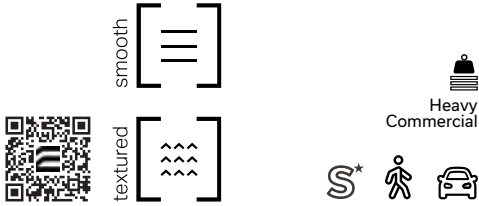


	Dimensions mm	Dimensions in.
A	90 x 320 x 240	3 1/2 x 12 5/8 x 9 1/2
B	90 x 320 x 320	3 1/2 x 12 5/8 x 12 5/8
C	90 x 320 x 360	3 1/2 x 12 5/8 x 14 3/16
D	90 x 320 x 400	3 1/2 x 12 5/8 x 15 3/4
E	90 x 320 x 440	3 1/2 x 12 5/8 x 17 5/16
Cube ft ²	86.8	12.4 per row

Mass/ft ²	19.36 kg	42.6 lb
Mass/ft ²	20.65 kg	45.4 lb
Mass/ft ²	25.55 kg	56.2 lb


Sold separately




Laying Patterns



Linear



Linear
50% ABCDE + 50%
Large Rectangle




Linear
Small Rectangle

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 90 Crescendo 320 Paver							
320 x 240							
320 x 320	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
320 x 360							
320 x 400							
320 x 440							


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 100 Crescendo 300 Paver



Heavy Commercial


Colour
White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth




	Dimensions mm	Dimensions in.
A	100 x 300 x 400	4 x 11 13/16 x 15 3/4
B	100 x 300 x 500	4 x 11 13/16 x 19 11/16
C	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	22.8 kg	50.16 lb
Cube ft ²	77.52	9.69 per row

Mass/ft ²	22.8 kg	50.16 lb
Units are not sold separately		


Typical Row




Laying Patterns



Linear



Linear
70% ABC + 30% D




Linear
100% D

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 100 Crescendo 300 Paver 300 x 400 300 x 500 300 x 600	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 150 Crescendo 125 Paver

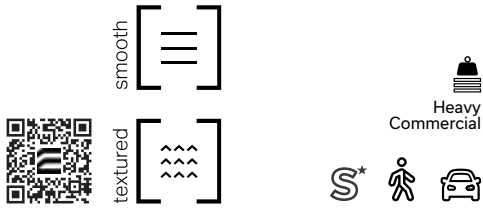

smooth	[≡]	Colour	
		White - Smooth	
		Cinder Grey - Smooth	
		Charcoal - Smooth	
		Light Charcoal - Smooth	
		Black ETX - Smooth	
		Light Grey - Smooth	
		Beige Grey - Smooth	
Beige - Smooth			


textured	[≡≡≡]	Colour	
		Cinder Grey - Granitech	
		Light Charcoal - Granitech	
		Charcoal - Granitech	
		Light Grey - Granitech	
		Beige Grey - Granitech	
		Beige - Granitech	
		Opal White - Granitech	
		Stanstead Grey - Granitech	
		Cambrian Brown - Granitech	
Cambrian Black - Granitech			

		Dimensions mm	Dimensions in.
A	A	150 x 125 x 333.33	5 7/8 x 4 15/16 x 13 1/8
B	B	150 x 125 x 416.67	5 7/8 x 4 15/16 x 16 3/8
C	C	150 x 125 x 458.33	5 7/8 x 4 15/16 x 18
D	D	150 x 125 x 500	5 7/8 x 4 15/16 x 19 11/16
E	E	150 x 125 x 541.67	5 7/8 x 4 15/16 x 21 5/16
F	F	150 x 125 x 583.33	5 7/8 x 4 15/16 x 23
	Cube ft ²	53.80	10.76 per row
	Cube ft ²	53.80	10.76 per row
	Cube ft ²	43.04	10.76 per row


Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Units are not sold separately

Typical Row



Laying Pattern




Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 125 Paver 125 x 333.33 125 x 416.67 125 x 458.33 125 x 500 125 x 541.67 125 x 583.33	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 150 Crescendo 320 Paver

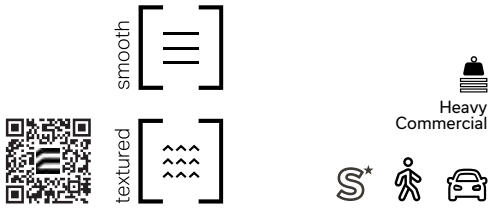

smooth	Colour	
	Symbol	Colour
		White - Smooth
		Cinder Grey - Smooth
		Charcoal - Smooth
		Light Charcoal - Smooth
		Black ETX - Smooth
		Light Grey - Smooth
		Beige Grey - Smooth
		Beige - Smooth


textured	Colour	
	Symbol	Colour
		Cinder Grey - Granitech
		Light Charcoal - Granitech
		Charcoal - Granitech
		Light Grey - Granitech
		Beige Grey - Granitech
		Beige - Granitech
		Opal White - Granitech
		Stanstead Grey - Granitech
		Cambrian Brown - Granitech
		Cambrian Black - Granitech

		Dimensions mm	Dimensions in.
A		150 x 320 x 240	5 7/8 x 12 5/8 x 9 1/2
B		150 x 320 x 320	5 7/8 x 12 5/8 x 12 5/8
C		150 x 320 x 360	5 7/8 x 12 5/8 x 14 3/16
D		150 x 320 x 400	5 7/8 x 12 5/8 x 15 3/4
E		150 x 320 x 440	5 7/8 x 12 5/8 x 17 5/16
	Cube ft ²	49.6	12.4 per row
	Cube ft ²	49.6	12.4 per row
	Cube ft ²	37.2	1.4 per row


Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Units are not sold separately

Typical Row



Laying Pattern




Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 320 Paver							
125 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
250 x 500							Width: -1.0 to +2.0 mm
500 x 500							Height: ±3.0 mm
750 x 500							
200 x 200							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 200 Crescendo 300 Paver

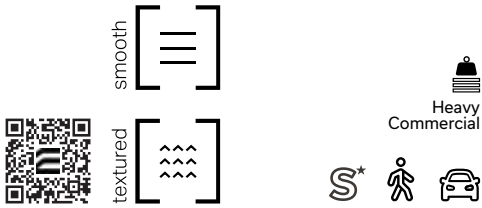

smooth	Colour	
	Finish	Colour
[]	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	


textured	Colour	
	Finish	Colour
[]	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	

	Dimensions mm	Dimensions in.
A	200 x 300 x 300	7 7/8 x 11 13/16 x 11 13/16
B	200 x 300 x 412.5	7 7/8 x 11 13/16 x 16 1/4
C	200 x 300 x 487.5	7 7/8 x 11 13/16 x 19 3/16
D	200 x 300 x 525	7 7/8 x 11 13/16 x 20 5/8
E	200 x 300 x 562.5	7 7/8 x 11 13/16 x 22 1/8
F	200 x 300 x 637.5	7 7/8 x 11 13/16 x 25 1/8
G	200 x 300 x 675	7 7/8 x 11 13/16 x 26 9/16
Unit/area	16 units/m ²	1.49 units/ft ²
Cube ft ²	46.52	11.63 per row


Mass/ft ²	43.24 kg	95.12 lb
Mass/ft ²	45.64 kg	100.40 lb
Mass/ft ²	58.14 kg	127.90 lb

Units are not sold separately

Typical Row



Laying Pattern



Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 200 Crescendo 300 Paver 300 x 300 300 x 412.5 300 x 487.5 300 x 525 300 x 562.5 300 x 637.5 300 x 675	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.