



# Vika Stone *New*



- Dimensions ideal for smaller areas
- Three heights in the same cube to simplify on-site management
- Fewer cuts and faster installation due to its modular format
- Fully finished corners

|                      | <b>MIX</b> |
|----------------------|------------|
| Weight per cube (kg) | 1220       |
| Rows per cube        | 7          |
| Sq.ft. per row       | 11.44      |
| Sq.ft. per cube      | 80.08      |
| Corner pieces        | 100%       |

| <b>Code</b> | <b>Colour</b>       |
|-------------|---------------------|
| 169002144   | Range Chambord Grey |
| 169002143   | Range Newport Grey  |
| 169002145   | Oasis               |

|          |                        |                              |
|----------|------------------------|------------------------------|
| <b>A</b> | 90 mm x 56.5 mm x var. | 3 1/2 in. x 2 1/4 in. x var. |
| <b>B</b> | 90 mm x 123 mm x var.  | 3 1/2 in. x 4 7/8 in. x var. |
| <b>C</b> | 90 mm x 190 mm x var.  | 3 1/2 in. x 7 1/2 in. x var. |



**A**





**B**



**C**


**Suggested Laying Pattern:**

**Modular**

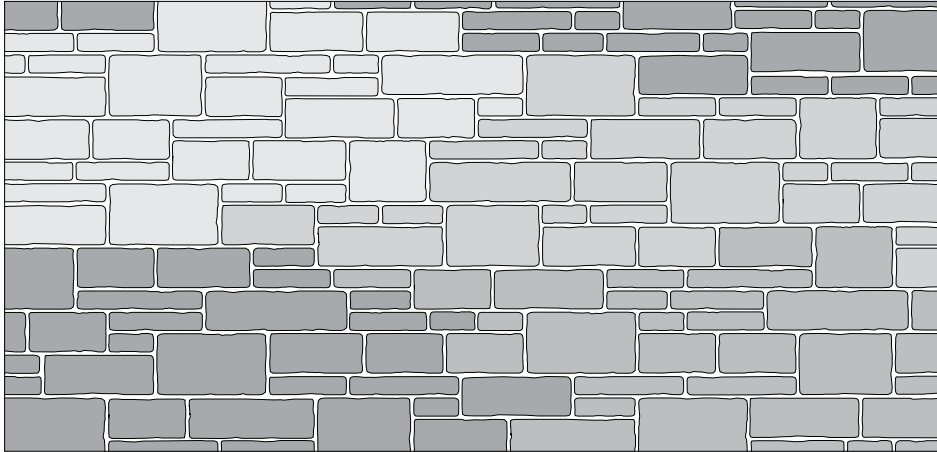


For information purposes only. The pattern should be adapted to the existing rows on the pallet when installed.

**Typical Row:**

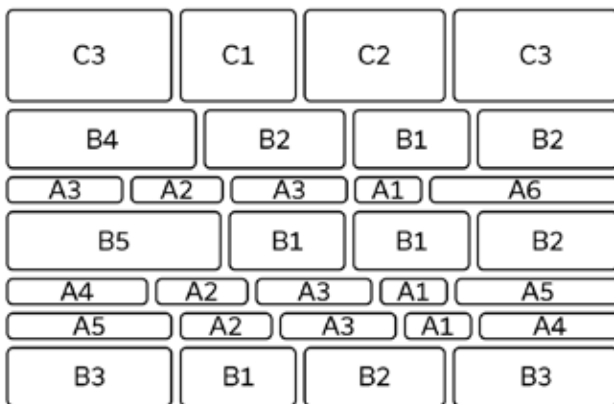

Mixed 3-height stones: small, medium and large

**Sizes - Stone Cladding:**

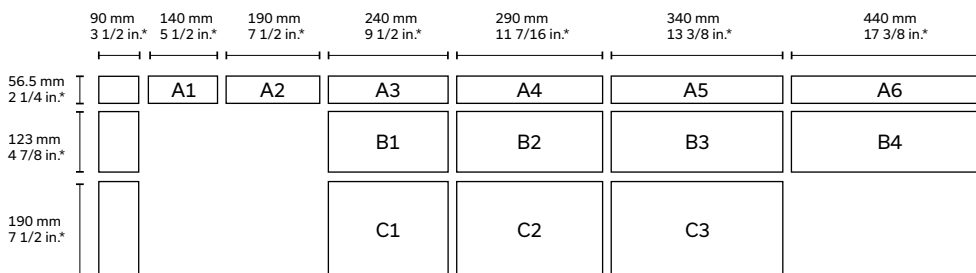

\* Actual dimensions. Allow a 1/3 in. - 8 mm mortar joint in order to obtain nominal dimensions.

**Technical information**

| Product    | Standard   | Compressive Strength | Density                         | Absorption                | Dimension Tolerance                                      | Fire Resistance (CNB) |
|------------|------------|----------------------|---------------------------------|---------------------------|--|-----------------------|
| Vika Stone | CSA A165.1 | 15 MPa               | A : Over 2000 kg/m <sup>3</sup> | A : 175 kg/m <sup>3</sup> | Thickness: ±2.0 mm<br>Height: ±2.0 mm<br>Length: ±3.0 mm | 1.39 hours            |