


Boulevard 300 Paver

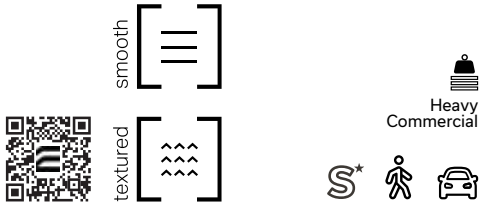

smooth	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

Custom colour available, call for information

100 x 300		Dimensions mm	Dimensions in.
	A	100 x 100 x 300	4 x 4 x 11 13/16
	Unit/area	33.33 units/m ²	3.05 units/ft ²
	Cube ft ²	72.33	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------


Sold separately



100 x 600		Dimensions mm	Dimensions in.
	J	100 x 100 x 600	4 x 4 x 23 5/8
	Unit/area	16.67 units/m ²	1.52 units/ft ²
	Cube ft ²	72.33	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------


Sold separately



100 x 450		Dimensions mm	Dimensions in.
	B	100 x 100 x 450	4 x 4 x 17 3/4
	Unit/area	22.22 units/m ²	2.06 units/ft ²
	Cube ft ²	85.28	10.66 per row
	Cube ft ²	85.28	10.66 per row
Cube ft ²	63.96	10.66 per row	

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb


Sold separately



150 x 450		Dimensions mm	Dimensions in.
	C	100 x 150 x 450	4 x 5 7/8 x 17 3/4
	Unit/area	14.81 units/m ²	1.37 units/ft ²
	Cube ft ²	81.36	10.17 per row
	Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row	

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately



Boulevard 300 Paver - cont'd

150 x 150




	Dimensions mm	Dimensions in.
D	100 x 150 x 150	4 x 5 7/8 x 5 7/8
Unit/area	44.44 units/m ²	4.12 units/ft ²
Cube ft ²	81.36	10.17 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
E	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 300




	Dimensions mm	Dimensions in.
F	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



200 x 600




	Dimensions mm	Dimensions in.
G	100 x 200 x 600	4 x 7 7/8 x 23 5/8
Unit/area	8.33 units/m ²	0.77 unit/ft ²
Cube ft ²	72.31	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 600




	Dimensions mm	Dimensions in.
H	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	5.55 units/m ²	0.52 unit/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



600 x 600



	Dimensions mm	Dimensions in.
I	100 x 600 x 600	4 x 23 5/8 x 23 5/8
Unit/area	2.77 units/m ²	0.26 unit/ft ²
Cube ft ²	46.5	7.75 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Mass/ft ²	23.63 kg	51.99 lb
----------------------	----------	----------

Mass/ft ²	28.83 kg	63.40 lb
----------------------	----------	----------


Sold separately

Typical Row




Boulevard 300 Paver - cont'd


Laying Patterns




Linear
100% A, B, C, E, G, H or J




Linear modified
75% F + 25% A
75% I + 25% G




Modular
67% H + 21% F + 12% E




Modular
50% I + 50%
50% F + 50% E




Modular
67% I + 33% H
67% F + 33% E




Modular
89% H + 11% E




Modular
67% H + 33% E




Modular
89% E + 11% D
89% H + 11% F




Modular
67% H + 25% F + 8% E




Modular
71% H + 25% F + 5% E




Modular
80% H + 10% F + 10% E




Modular
80% H + 10% F + 10% E



Modular
50% H + 38% F + 12% E



Checkerboard modified
60% E + 40% A
60% H + 40% G




Herringbone
100% A, B, C, E, G, H or J

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 300 Paver							
100 x 300							
100 x 600							
100 x 450							
150 x 450							
150 x 150	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
150 x 300							
300 x 300							
200 x 600							
300 x 600							
600 x 600							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard 500 Paver

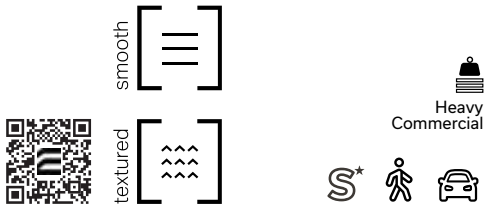

smooth	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

500 x 500




	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ³	64.5	10.75 per row


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately


Typical Row



Laying Patterns



Linear




Checkerboard

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 500 Paver 500 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Drain Paver



ASTM #8 Aggregate
jointing material




Heavy
Commercial



smooth	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
Red - Smooth	

textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

209 x 209




	Dimensions mm	Dimensions in.
	100 x 209 x 209	4 x 8 1/4 x 8 1/4
Unit/area	22.9 units/m ²	2.13 units/ft ²
Cube ft ³	56.4	9.4 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ³	69.78	11.63 per row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately


Typical Row




Laying Patterns 209 x 209




Linear



Checkerboard




Checkerboard




Checkerboard


Laying Patterns 150 x 300




Parquet



Herringbone



Herringbone 45°



Linear

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Drain Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Boulevard Drain 209 x 209: Joint spacing is 12 mm (0.47 in.) which allows an initial surface infiltration rate of +/-17 387mm/hr. / Boulevard Drain 150 x 300: Joint spacing is 12 mm (0.47 in.)

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.


New


Boulevard Hexagon Paver




Light Commercial

Colour
White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth
Red - Smooth


	Dimensions mm	Dimensions in.
	100 x 256 x 300	4 x 10 1/16 x 11 13/16
Unit/area	13.23 units/m ²	1.23 units/ft ²
Cube ft ²	68.32	9.76 per row

Typical Row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------



Laying Pattern




Checkerboard

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Hexagon Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Striated Paver




smooth []	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Shefford Beige - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech



	Dimensions mm	Dimensions in.
	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ²	69.78	11.63 per row
Mass/ft ²	22.33 kg	49.13 lb

Typical Row




TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Striated Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Verde Paver



Light Commercial




Colour
White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth
Red - Smooth




	Dimensions mm	Dimensions in.
	100 x 300 x 450	4 x 11 13/16 x 17 3/4
Weight/unit	13 kg	28 lb
Unit/area	7.36 units/m ²	0.68 units/ft ²
Area/layer	1.09 m ²	11.72 ft ²
Area/cube	8.72 m²	93.76 ft²
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	28.80 lin. m	94.48 lin. ft
Qty/cube	64 units	64 units
Weight/cube	1003 kg	2213 lb

Typical Row



Laying Pattern



Checkerboard

TECHNICAL INFORMATION

Product	Standard	Void Opening	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Verde Paver	CSA A231.2	50%	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.