


Boulevard 300 Paver

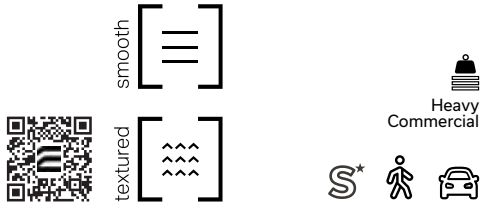

smooth	Colour
[smooth icon]	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

textured	Colour
[textured icon]	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

100 x 300		Dimensions mm	Dimensions in.
	A	100 x 100 x 300	4 x 4 x 11 13/16
	Unit/area	33.33 units/m ²	3.05 units/ft ²
	Cube ft ²	72.33	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		

Typical Row			

100 x 600		Dimensions mm	Dimensions in.
	J	100 x 100 x 600	4 x 4 x 23 5/8
	Unit/area	16.67 units/m ²	1.52 units/ft ²
	Cube ft ²	72.33	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
Sold separately		

Typical Row	

100 x 450		Dimensions mm	Dimensions in.
	B	100 x 100 x 450	4 x 4 x 17 3/4
	Unit/area	22.22 units/m ²	2.06 units/ft ²
	Cube ft ²	85.28	10.66 per row
	Cube ft ²	85.28	10.66 per row
	Cube ft ²	63.96	10.66 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		

Typical Row									

150 x 450		Dimensions mm	Dimensions in.
	C	100 x 150 x 450	4 x 5 7/8 x 17 3/4
	Unit/area	14.81 units/m ²	1.37 units/ft ²
	Cube ft ²	81.36	10.17 per row
	Cube ft ²	81.36	10.17 per row
	Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		

Typical Row					

Boulevard 300 Paver - cont'd

150 x 150




	Dimensions mm	Dimensions in.
D	100 x 150 x 150	4 x 5 7/8 x 5 7/8
Unit/area	44.44 units/m ²	4.12 units/ft ²
Cube ft ²	81.36	10.17 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
E	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 300




	Dimensions mm	Dimensions in.
F	100 x 300 x 300	4 x 11 13/16 x 11 13/16
Unit/area	11.11 units/m ²	1.03 units/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



200 x 600




	Dimensions mm	Dimensions in.
G	100 x 200 x 600	4 x 7 7/8 x 23 5/8
Unit/area	8.33 units/m ²	0.77 unit/ft ²
Cube ft ²	72.31	10.33 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



300 x 600




	Dimensions mm	Dimensions in.
H	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	5.55 units/m ²	0.52 unit/ft ²
Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately

Typical Row



600 x 600




	Dimensions mm	Dimensions in.
I	100 x 600 x 600	4 x 23 5/8 x 23 5/8
Unit/area	2.77 units/m ²	0.26 unit/ft ²
Cube ft ²	46.5	7.75 per row
Cube ft ²	81.36	10.17 per row
Cube ft ²	61.02	10.17 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb


Sold separately

Typical Row




Boulevard 300 Paver - cont'd


Laying Patterns




Linear
100% A, B, C, E, G, H or J




Linear modified
75% F + 25% A
75% I + 25% G




Modular
67% H + 21% F + 12% E




Modular
50% I + 50%
50% F + 50% E




Modular
67% I + 33% H
67% F + 33% E




Modular
89% H + 11% E




Modular
67% H + 33% E




Modular
89% E + 11% D
89% H + 11% F




Modular
67% H + 25% F + 8% E




Modular
71% H + 25% F + 5% E




Modular
80% H + 10% F + 10% E




Modular
80% H + 10% F + 10% E



Modular
50% H + 38% F + 12% E



Checkerboard modified
60% E + 40% A
60% H + 40% G




Herringbone
100% A, B, C, E, G, H or J

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 300 Paver							
100 x 300							
100 x 600							
100 x 450							
150 x 450							
150 x 150	CSA A231.2	N/A	μ 50 MPa $\geq$ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: $\pm$ 3.0 mm
150 x 300							
300 x 300							
200 x 600							
300 x 600							
600 x 600							
600 x 600							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard 500 Paver

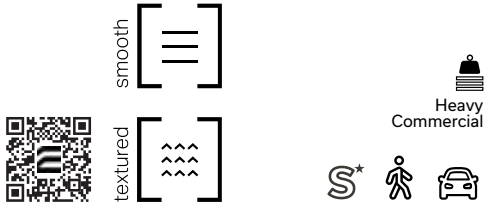


Colour	
smooth 	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

500 x 500 	Dimensions mm	Dimensions in.
	100 x 500 x 500	4 x 19 11/16 x 19 11/16
Unit/area	4 units/m ²	0.37 units/ft ²
Cube ft ³	64.5	10.75 per row


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb
Sold separately		

Typical Row	
	

Laying Patterns



Linear



Checkerboard

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard 500 Paver 500 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Drain Paver



smooth [≡]



textured [≡≡≡]

ASTM #8 Aggregate
jointing material



Heavy
Commercial



smooth [≡]

Colour


White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth
Red - Smooth

textured [≡≡≡]

Colour

Cinder Grey - Granitech
Light Charcoal - Granitech
Charcoal - Granitech
Light Grey - Granitech
Beige Grey - Granitech
Beige - Granitech
Opal White - Granitech
Stanstead Grey - Granitech
Cambrian Brown - Granitech
Cambrian Black - Granitech

209 x 209




	Dimensions mm	Dimensions in.
	100 x 209 x 209	4 x 8 1/4 x 8 1/4
Unit/area	22.9 units/m ²	2.13 units/ft ²
Cube ft ²	56.4	9.4 per row


Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row



150 x 300




	Dimensions mm	Dimensions in.
	100 x 150 x 300	4 x 5 7/8 x 11 13/16
Unit/area	22.22 units/m ²	2.06 units/ft ²
Cube ft ²	69.78	11.63 per row


Mass/ft ²	22.33 kg	49.13 lb
----------------------	----------	----------

Sold separately


Typical Row




Laying Patterns 209 x 209




Linear



Checkerboard




Checkerboard




Checkerboard


Laying Patterns 150 x 300




Parquet



Herringbone



Herringbone 45°



Linear


TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Drain Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Boulevard Drain 209 x 209: Joint spacing is 12 mm (0.47 in.) which allows an initial surface infiltration rate of +/-17 387mm/hr. / Boulevard Drain 150 x 300: Joint spacing is 12 mm (0.47 in.)

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

New Boulevard Hexagon Paver





Light
Commercial




smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

	Dimensions mm	Dimensions in.
	100 x 256 x 300	4 x 10 1/16 x 11 13/16
Unit/area	13.23 units/m ²	1.23 units/ft ²
Cube ft ²	68.32	9.76 per row

Typical Row		
		
Mass/ft ²	22.33 kg	49.13 lb



Laying Pattern



Checkerboard

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Hexagon Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Striated Paver



smooth []	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Shefford Beige - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

	Dimensions mm	Dimensions in.
	100 x 300 x 300	4 x 11 13/16 x 11 13/16
	Unit/area	11.11 units/m ² 1.03 units/ft ²
	Cube ft ²	69.78 11.63 per row
	Mass/ft ²	22.33 kg 49.13 lb




TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Striated Paver	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard Verde Paver



Light Commercial




Colour

White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth




	Dimensions mm	Dimensions in.
	100 x 300 x 450	4 x 11 13/16 x 17 3/4
Weight/unit	13 kg	28 lb
Unit/area	7.36 units/m ²	0.68 units/ft ²
Area/layer	1.09 m ²	11.72 ft ²
Area/cube	8.72 m²	93.76 ft²
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	28.80 lin. m	94.48 lin. ft
Qty/cube	64 units	64 units
Weight/cube	1003 kg	2213 lb

Typical Row



Laying Pattern



Checkerboard

TECHNICAL INFORMATION

Product	Standard	Void Opening	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard Verde Paver	CSA A231.2	50%	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.