


# Boulevard TLI 90 Crescendo 320 Paver



smooth	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech




	Dimensions mm	Dimensions in.
A	90 x 320 x 240	3 1/2 x 12 5/8 x 9 1/2
B	90 x 320 x 320	3 1/2 x 12 5/8 x 12 5/8
C	90 x 320 x 360	3 1/2 x 12 5/8 x 14 3/16
D	90 x 320 x 400	3 1/2 x 12 5/8 x 15 3/4
E	90 x 320 x 440	3 1/2 x 12 5/8 x 17 5/16
Cube ft²	86.8	12.4 per row


Mass/ft²	19.36 kg	42.6 lb
Mass/ft²	20.65 kg	45.4 lb
Mass/ft²	25.55 kg	56.2 lb

Sold separately


## Typical Row




## Laying Patterns



Linear



Linear  
50% ABCDE + 50%  
Large Rectangle




Linear  
Small Rectangle

## TECHNICAL INFORMATION



Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Boulevard TLI 90 Crescendo 320 Paver</b>							
320 x 240	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
320 x 320							Width: -1.0 to +2.0 mm
320 x 360							Height: ±3.0 mm
320 x 400							
320 x 440							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.




# Boulevard TLI 100 Crescendo 300 Paver

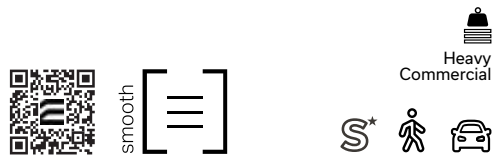

smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

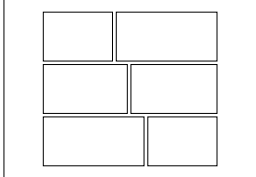		Dimensions mm	Dimensions in.	Typical Row		
	A	100 x 300 x 400	4 x 11 13/16 x 15 3/4			
	B	100 x 300 x 500	4 x 11 13/16 x 19 11/16			
	C	100 x 300 x 600	4 x 11 13/16 x 23 5/8			
	Unit/area	22.8 kg	50.16 lb			
	Cube ft <sup>2</sup>	77.52	9.69 per row			
				Mass/ft <sup>2</sup>	22.8 kg	50.16 lb
				Units are not sold separately		

## Laying Patterns



		
Linear	Linear 70% ABC + 30% D	Linear 100% D

## TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Boulevard TLI 100 Crescendo 300 Paver</b>							
300 x 400	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
300 x 500							Width: -1.0 to +2.0 mm
300 x 600							Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

# Boulevard TLI 150 Crescendo 125 Paver



smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured [≡≡≡]	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

		Dimensions mm	Dimensions in.
A	A	150 x 125 x 333.33	5 7/8 x 4 15/16 x 13 1/8
B	B	150 x 125 x 416.67	5 7/8 x 4 15/16 x 16 3/8
C	C	150 x 125 x 458.33	5 7/8 x 4 15/16 x 18
D	D	150 x 125 x 500	5 7/8 x 4 15/16 x 19 11/16
E	E	150 x 125 x 541.67	5 7/8 x 4 15/16 x 21 5/16
F	F	150 x 125 x 583.33	5 7/8 x 4 15/16 x 23
	Cube ft <sup>2</sup>	53.80	10.76 per row
	Cube ft <sup>2</sup>	53.80	10.76 per row
	Cube ft <sup>2</sup>	43.04	10.76 per row


Mass/ft <sup>2</sup>	32.6 kg	71.7 lb
Mass/ft <sup>2</sup>	34.4 kg	75.7 lb
Mass/ft <sup>2</sup>	43.6 kg	95.9 lb

Units are not sold separately

## Typical Row



## Laying Pattern




Linear

## TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Boulevard TLI 150</b> <b>Crescendo 125 Paver</b> 125 x 333.33 125 x 416.67 125 x 458.33 125 x 500 125 x 541.67 125 x 583.33	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm


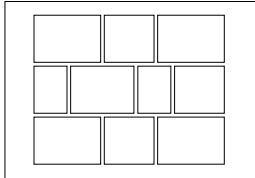




Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

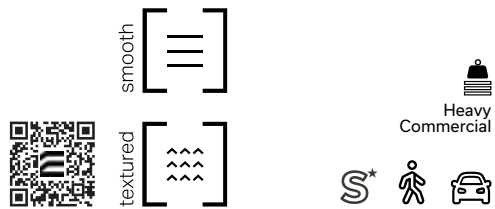
# Boulevard TLI 150 Crescendo 320 Paver



smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

textured [≡≡≡]	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

		Dimensions mm	Dimensions in.				Typical Row	
				Mass/ft²				
A		A 150 x 320 x 240	5 7/8 x 12 5/8 x 9 1/2	Mass/ft²	32.6 kg	71.7 lb		
B		B 150 x 320 x 320	5 7/8 x 12 5/8 x 12 5/8	Mass/ft²	34.4 kg	75.7 lb		
C		C 150 x 320 x 360	5 7/8 x 12 5/8 x 14 3/16	Mass/ft²	43.6 kg	95.9 lb		
D		D 150 x 320 x 400	5 7/8 x 12 5/8 x 15 3/4	Units are not sold separately				
E		E 150 x 320 x 440	5 7/8 x 12 5/8 x 17 5/16					
		Cube ft²	49.6					12.4 per row
		Cube ft²	49.6	12.4 per row				
		Cube ft²	37.2	1.4 per row				





TECHNICAL INFORMATION							
Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Boulevard TLI 150 Crescendo 320 Paver</b>							
125 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
250 x 500							Width: -1.0 to +2.0 mm
500 x 500							Height: ±3.0 mm
750 x 500							
200 x 200							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.



# Boulevard TLI 200 Crescendo 300 Paver




smooth	Colour	
	smooth	textured
	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	
	Red - Smooth	

textured	Colour	
	smooth	textured
	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	


		Dimensions mm	Dimensions in.
	A	200 x 300 x 300	7 7/8 x 11 13/16 x 11 13/16
	B	200 x 300 x 412.5	7 7/8 x 11 13/16 x 16 1/4
	C	200 x 300 x 487.5	7 7/8 x 11 13/16 x 19 3/16
	D	200 x 300 x 525	7 7/8 x 11 13/16 x 20 5/8
	E	200 x 300 x 562.5	7 7/8 x 11 13/16 x 22 1/8
	F	200 x 300 x 637.5	7 7/8 x 11 13/16 x 25 1/8
	G	200 x 300 x 675	7 7/8 x 11 13/16 x 26 9/16
	Unit/area	16 units/m <sup>2</sup>	1.49 units/ft <sup>2</sup>
	Cube ft <sup>2</sup>	46.52	11.63 per row

Mass/ft <sup>2</sup>	43.24 kg	95.12 lb
Mass/ft <sup>2</sup>	45.64 kg	100.40 lb
Mass/ft <sup>2</sup>	58.14 kg	127.90 lb

Units are not sold separately



## Laying Pattern



Linear

## TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
<b>Boulevard TLI 200</b>							
<b>Crescendo 300 Paver</b>							
300 x 300							
300 x 412.5							
300 x 487.5	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
300 x 525							
300 x 562.5							
300 x 637.5							
300 x 675							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.