


Boulevard TLI 80 Paver



Light
Commercial



Colour

White - Smooth

Cinder Grey - Smooth

Charcoal - Smooth

Light Charcoal - Smooth

Black ETX - Smooth

Light Grey - Smooth

Beige Grey - Smooth

Beige - Smooth

Red - Smooth


120 x 240




	Dimensions mm	Dimensions in.
A	90 x 120 x 240	3 1/8 x 4 3/4 x 9 1/2
Unit/area	34.7 units/m ²	3.23 units/ft ²
Cube ft ²	115.32	9.61 per row

Mass/ft² 17.36 kg 38.19 lb

Typical Row



Laying Pattern




Mechanical

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 80 Paver 120 x 240	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 90 Paver

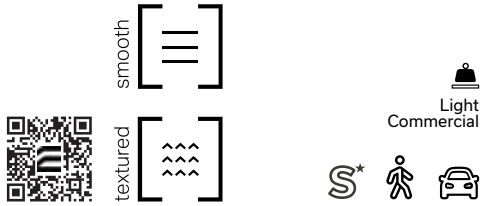


smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured [≡≡≡]	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

160 x 240	Dimensions mm	Dimensions in.
	A	90 x 160 x 240
	Unit/area	26 units/m ²
	Cube ft ²	86.8

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb


Typical Row



320 x 520	Dimensions mm	Dimensions in.
	B	90 x 320 x 520
	Unit/area	6 units/m ²
	Cube ft ²	86

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Typical Row




TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 90 Paver 160 x 240 320 x 520	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 100 Paver



smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured [≡≡≡]	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech


150 x 300		Dimensions mm	Dimensions in.
	A	100 x 150 x 300	4 x 5 7/8 x 11 13/16
	Unit/area	22.22 units/m ²	2.06 units/ft ²
	Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row





300 x 300		Dimensions mm	Dimensions in.
	B	100 x 300 x 300	4 x 11 13/16 x 11 13/16
	Unit/area	11.11 units/m ²	1.03 units/ft ²
	Cube ft ²	69.78	11.63 per row

Mass/ft ²	22.33 kg	49.13 lb
Mass/ft ²	23.63 kg	51.99 lb
Mass/ft ²	28.83 kg	63.40 lb

Sold separately

Typical Row




300 x 700		Dimensions mm	Dimensions in.
	C	150 x 300 x 700	4 x 11 13/16 x 27 9/16
	Unit/area	22.8 units/m ²	50.16 units/ft ²
	Cube ft ²	54.24	6.78 per row

Mass/ft ²	22.8 kg	50.16 lb
----------------------	---------	----------


Smooth finish only

Typical Row




Boulevard TLI 100 Paver - cont'd


Laying Patterns



Linear



Linear




Modular
50% A + 50% B

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 100 Paver							
150 x 300	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
300 x 300							Width: -1.0 to +2.0 mm
300 x 700							Height: ±3.0 mm


Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 150 Paver




smooth [≡]	Colour	
	White - Smooth	
	Cinder Grey - Smooth	
	Charcoal - Smooth	
	Light Charcoal - Smooth	
	Black ETX - Smooth	
	Light Grey - Smooth	
	Beige Grey - Smooth	
	Beige - Smooth	
	Red - Smooth	


textured [≡≡≡]	Colour	
	Cinder Grey - Granitech	
	Light Charcoal - Granitech	
	Charcoal - Granitech	
	Light Grey - Granitech	
	Beige Grey - Granitech	
	Beige - Granitech	
	Opal White - Granitech	
	Stanstead Grey - Granitech	
	Cambrian Brown - Granitech	
	Cambrian Black - Granitech	

125 x 150	Dimensions mm	Dimensions in.
	A	150 x 500 x 125
	Unit/area	16 units/m ²
	Cube ft ²	60.55

Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb


Sold separately




250 x 500	Dimensions mm	Dimensions in.
	B	150 x 500 x 250
	Unit/area	8 units/m ²
	Cube ft ²	67.25

Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb


Sold separately



500 x 500	Dimensions mm	Dimensions in.
	C	150 x 500 x 500
	Unit/area	4 units/m ²
	Cube ft ²	64.56


Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Sold separately



Boulevard TLI 100 Paver - cont'd

750 x 500




	Dimensions mm	Dimensions in.
D	150 x 500 x 750	5 7/8 x 19 11/16 x 29 1/2
Unit/area	2.67 units/m ²	0.25 units/ft ²
Cube ft ²	48.42	8.07 per row

Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Sold separately

Typical Row



200 x 200




	Dimensions mm	Dimensions in.
E	150 x 200 x 200	5 7/8 x 7 7/8 x 7 7/8
Cube ft ²	51.6	8.6 per row


Mass/ft ²	32.6 kg	71.7 lb
Mass/ft ²	34.4 kg	75.7 lb
Mass/ft ²	43.6 kg	95.9 lb

Sold separately


Typical Row




Laying Patterns




Modular
17% B + 33% C + 50% D




Modular
21% B + 42% C + 37% D




Modular
21% B + 17% C + 62% D




Modular
25% B + 50% C + 25% D



Modular
13% B + 25% C + 62% D



Modular
8% B + 17% C + 75% D



Modular
29% B + 33% C + 38% D

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Paver							
125 x 500							
250 x 500							
500 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
750 x 500							
200 x 200							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.