




Alternative Masonry

Suretouch

Virtuo Stone



- Fine lines and smooth surfaces
- Available in various trendy and contemporary colours
- Fully finished corners

Weight per cube (kg)	1183
Rows per cube	12
Sq.ft. per row	9.32
Sq.ft. per cube	111.84
Lin. ft. per row	14
Lin. ft. per cube	168.05
Suretouch System weight (stone, mortar, panel and hardware)	
	22 lb/ft ² approximately

Code	Colour
34356034	Range Newport Grey
34356035	Range Scandina Grey



A



B




C



D

Suretouch – Virtuo Stone


Laying Pattern:




Linear

* Follow the polystyrene laying pattern

Typical Layout:

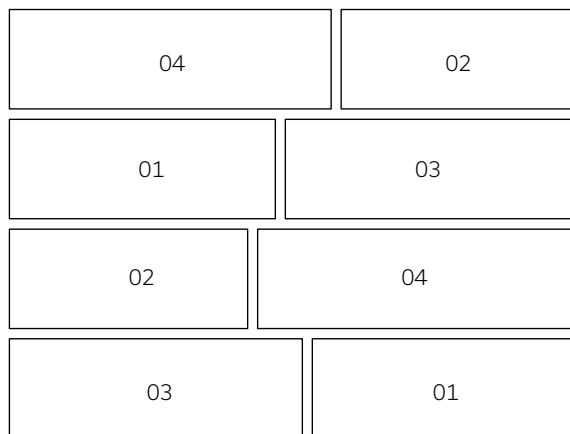

Components

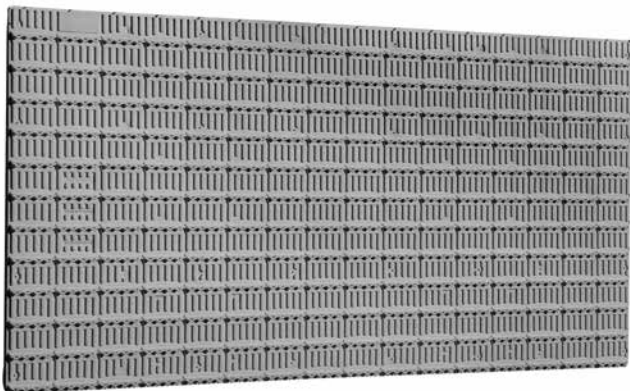

Polystyrene panel
50 x 1219 x 2438 mm - 2 x 48 x 96 in



Kit 90 - anchors, screws,
weep



Starter Base
83 x 83 x 3048 mm - 3 1/2 x 3 1/2 x 120 in

Necessary installation material

Virtuo Stone				Product code
Sq.ft. of stone/pallet	1 cube = 12 rows	1 row = 9.32	Total : 111.84 ft ²	
Polystyrene panels	1 pack (6 panels) = 1 cube of stone		1 panel = 32.5 ft ²	34350052
Kit 90 - anchors/screws	1 box of anchors/screws 90 = 1 cube of stone			34359020
	1 bag 30 kg = 45 ft ²			
Mortar	1-1-6 mortar mix recommended			

Technical information

Product	Standard	Compressive Strength	Density	Dimension Tolerance
Virtuo Stone	CSA A165.94	25 MPa	A: Over 2000 kg/m ³	Thickness: ±2.0 mm Height: ±2.0 mm Length: ±3.0 mm

* See CCMC accreditation for more technical information