



# Colosseo Block *New*




- Two choices of sizing, both with an architectural block look and finished corners on all units
- Smooth texture on both faces—can be installed on either side
- Cored block, which provides increased adhesion to mortar and eases the installation (lighter units)
- Ideal for institutional, commercial, industrial projects that require fast and economical installation

|                      | A         | B        |
|----------------------|-----------|----------|
| Weight per cube (kg) | 1 404     | 990      |
| Rows per cube        | 5         | 4        |
| Sq.ft. per row       | 19.14     | 19.31    |
| Sq.ft. per cube      | 95.72     | 77.24    |
| Corner pieces        | 100%      | 100%     |
| Lin. ft. per row     | 30.71     | 30.97    |
| Lin. ft. per cube    | 153.54    | 123.88   |
| Qty per cube         | 120 units | 64 units |


|   |                   |                |
|---|-------------------|----------------|
| A | 90 x 190 x 390 mm | 4 x 8 x 16 in. |
| B | 90 x 190 x 590 mm | 4 x 8 x 24 in. |

| Code 8 x 16 | Code 8 x 24 | Colour   |
|-------------|-------------|----------|
| 169001786   | 169001789   | Charcoal |
| 169001787   | 169001790   | Optra    |
| 169001788   | 169001791   | Sterling |

Units A and B are sold separately




A




B

Laying Patterns:




Running Bond - 8 in. x 16 in.




Running Bond - 8 in. x 24 in.

Typical Rows:

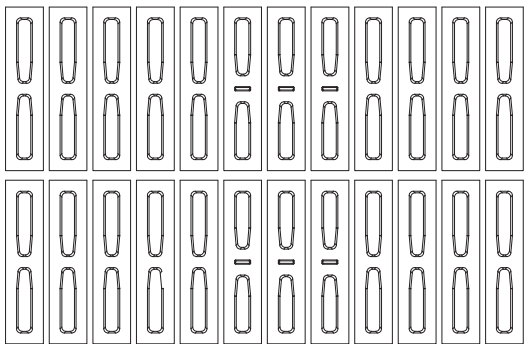

8 x 16

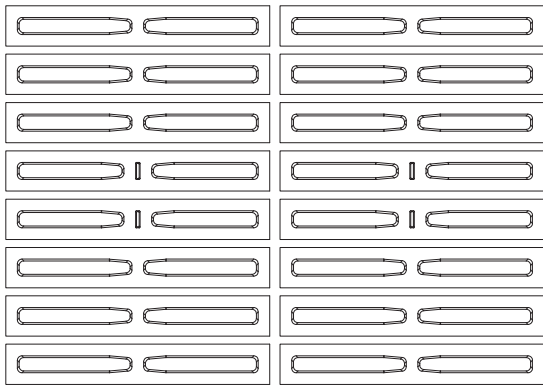

8 x 24

Technical information

| Product               | Standard   | Compressive Strength | Density                         | Absorption                | Dimension Tolerance                                      | Fire Resistance (CNB) |
|-----------------------|------------|----------------------|---------------------------------|---------------------------|----------------------------------------------------------|-----------------------|
| Colosseo Block 8 x 16 | CSA A165.1 | 15 MPa               | A : Over 2000 kg/m <sup>3</sup> | A : 175 kg/m <sup>3</sup> | Thickness: ±2.0 mm<br>Height: ±2.0 mm<br>Length: ±3.0 mm | 0.80 hours            |
| Colosseo Block 8 x 24 | CSA A165.1 | 15 MPa               | A : Over 2000 kg/m <sup>3</sup> | A : 175 kg/m <sup>3</sup> | Thickness: ±2.0 mm<br>Height: ±2.0 mm<br>Length: ±3.0 mm | 0.80 hours            |