


Melville® 18 x 36 DuraFusion Slab

[≡] [N]

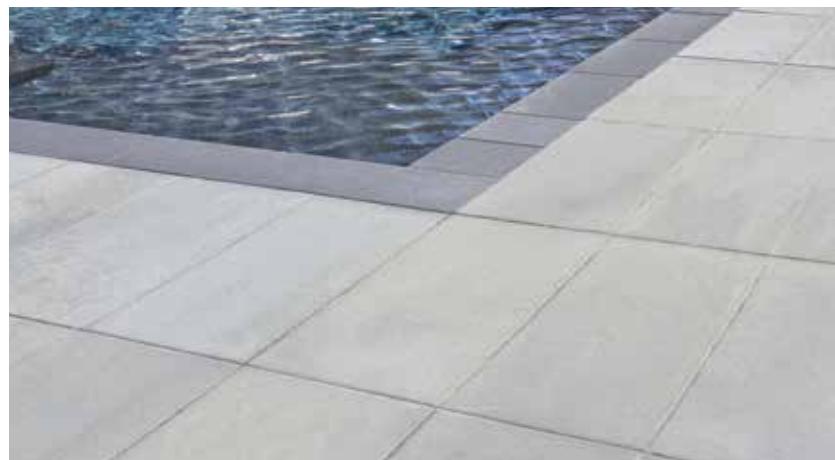


	Dimensions mm	Dimensions in.
	60 x 457 x 914	2 3/8 x 18 x 36
Weight/unit	58 kg	129 lb
Area/unit	0.37 m ²	4.5 ft ²
Area/layer	0.84 m ²	9.0 ft ²
Area/cube	8.36 m²	10 Rows
Qty/cube	20 units	20 units
Weight/cube	1167 kg	2573 lb


• **Techniseal®** 1 bag of sand covers approx. 353 ft²

Code	Colour
DuraFusion	
127003271	Amber
127003084	Scandina
127002795	Newport


Production location Metcalfe

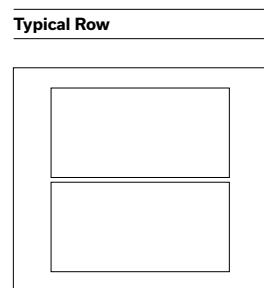


Laying Patterns



Checkerboard




Running Bond



Offset 1/3



Herringbone



Parquet

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Melville 18 x 36 DuraFusion Slab	CSA A231.1	±4.5 MPa	N/A	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches.

Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Given the weight of this Slab, it is highly recommended to use suction-based lifting equipment for handling and placement (avoid manual installation).