




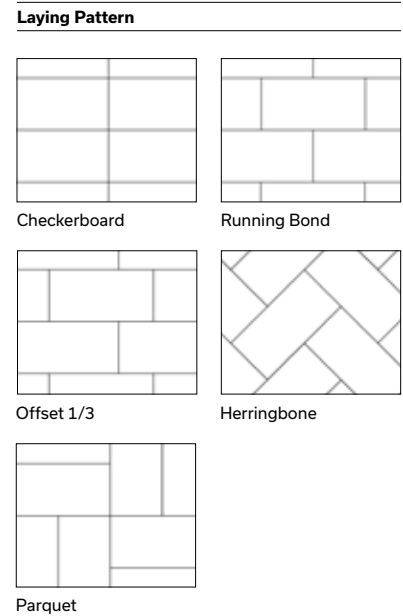
Melville® 18 x 36 DuraFusion Slab

| | Metric (mm) | Imperial (in.) |
|-------------|-----------------------------|----------------------|
| | 60 x 457 x 914 | 2 3/8 x 18 x 36 |
| Weight/unit | 58 kg | 129 lb |
| Area/unit | 0.37 m ² | 4.5 ft ² |
| Area/layer | 0.84 m ² | 9.0 ft ² |
| Area/cube | 8.36 m ² 10 Rows | 90.0 ft ² |
| Qty/cube | 20 units | 20 units |
| Weight/cube | 1167 kg | 2573 lb |

| Code | Colour - DuraFusion | |
|-----------|---------------------|---|
| 127003271 | Amber |  |
| 127003084 | Scandina |  |
| 127002795 | Newport |  |

| | |
|---------------------|--------|
| Production location | Milton |
|---------------------|--------|

1 bag of Techniseal sand covers approx.: 353 ft²



Technical Information

| | |
|---------------------------------------|--|
| Product | Melville 18 x 36 DuraFusion Slab |
| Standard | CSA A231.1 |
| Flexural Strength | ±4.5 MPa |
| Compressive Strength | N/A |
| De-icing salts freeze-thaw durability | 225 g/m ² after 28 cycles 500 g/m ² after 49 cycles |
| Density | N/A |
| Absorption | N/A |
| Dimension Tolerance* | Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm |

* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Given the weight of this slab, it is highly recommended to use suction-based lifting equipment for handling and placement (avoid manual installation).