



# Mondrian® Plus 60 Slab

	Metric (mm)	Imperial (in.)
A	60 x 165 x 330	2 3/8 x 6 1/2 x 13
B	60 x 330 x 330	2 3/8 x 13 x 13
C	60 x 330 x 495	2 3/8 x 13 x 19 1/2
Weight/unit (avg.)	13 kg	28 lb
Area/unit	0.11 m <sup>2</sup>	1.17 ft <sup>2</sup>
Area/layer	0.98 m <sup>2</sup>	10.55 ft <sup>2</sup>
Area/cube	11.76 m <sup>2</sup> 12 Rows	126.60 ft <sup>2</sup>
Qty/cube	A = 48 B = 48 C = 24	
Weight/cube	1551 kg	3419 lb

Code	Colour - Prestige
12052893	Range Margaux Beige
12052894	Range Amboise Beige
12052566	Range Scandina Grey
Colour - Standard	
12052891	Range Norvick Grey
12052892	Range Newport Grey

Production location Milton  
Can be double stacked

1 bag of Techniseal sand covers approx.: 65 ft<sup>2</sup>

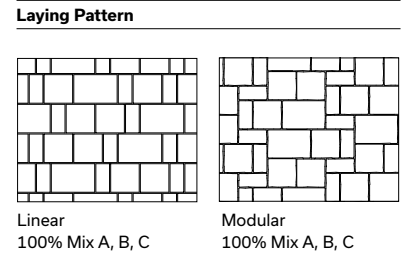

**Technical Information**

Product	Mondrian Plus 60 Slab
Standard	CSA A231.1
Flexural Strength	±4.5 MPa
Compressive Strength	N/A
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

\* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. The Mondrian Plus 60 Slab is compatible with the Mondrian Plus 60 Small Rectangle paver for non-vehicular application only.