



# Mondrian® Plus 60 Small Rectangle Paver

	Metric (mm)	Imperial (in.)
	60 x 165 x 330	2 3/8 x 6 1/2 x 13
Weight/unit	7 kg	16 lb
Area/unit	18.52 units/m <sup>2</sup>	1.71 units/ft <sup>2</sup>
Area/layer	0.82 m <sup>2</sup>	8.79 ft <sup>2</sup>
Area/cube	9.84 m <sup>2</sup> 12 Rows	105.48 ft <sup>2</sup>
Length/row	4.95 lin. m	16.25 lin. ft
Length/cube	59.43 lin. m	195.00 lin. ft
Qty/cube	180 units	180 units
Weight/cube	1283 kg	2830 lb

Code	Colour - Prestige
12052557	Rockland Black

Production location	Milton
---------------------	--------

1 bag of Techniseal sand covers approx.: 46 ft<sup>2</sup>

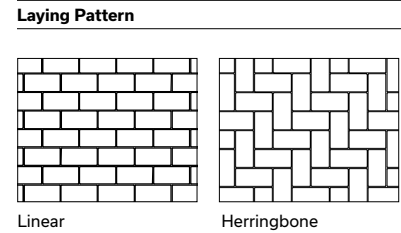

## Technical Information

Product	Mondrian Plus 60 Small Rectangle Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. The Mondrian Plus 60 Slab is compatible with the Mondrian Plus 60 small rectangle paver for non-vehicular application only.