




# Brooklyn Paver

	Metric (mm)	Imperial (in.)
	60 x 230 x 76	2 3/8 x 9 x 3
Weight/unit	2.3 kg	5.1 lb
Unit/area	0.02 m <sup>2</sup>	0.188 ft <sup>2</sup>
Area/layer	0.96 m <sup>2</sup>	10.3 ft <sup>2</sup>
Area/cube	9.58 m <sup>2</sup> 10 Rows	103.13 ft <sup>2</sup>
Qty/cube	550 units	550 units
Weight/cube	1272 kg	2805 lb


Code	Colour - TrueColor
127002180	Midnight 
127002181	Rosewood 

Production location    Montreal

1 bag of Techniseal sand covers approx.: 67 ft<sup>2</sup>



**Laying Pattern**

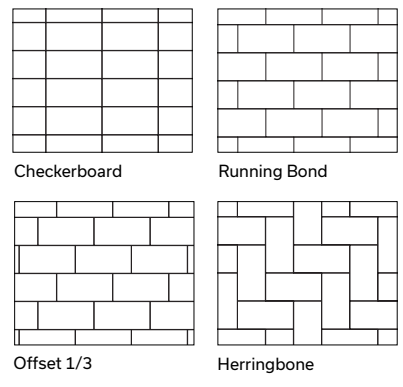

**Technical Information**

Product	Brooklyn Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.