



# Capio Paver

	Metric (mm)	Imperial (in.)
A	60 x 152 x 102	2 3/8 x 6 x 4
B	60 x 152 x 152	2 3/8 x 6 x 6
C	60 x 152 x 203	2 3/8 x 6 x 8
D	60 x 152 x 254	2 3/8 x 6 x 10
E	60 x 152 x 305	2 3/8 x 6 x 12
Weight/unit (avg.)	4 kg	9 lb
Unit/area (avg.)	0.03 unit/m <sup>2</sup>	0.33 unit/ft <sup>2</sup>
Area/layer (avg.)	1.07 m <sup>2</sup>	11.5 ft <sup>2</sup>
Area/cube	10.7 m <sup>2</sup>	115 ft <sup>2</sup>
Qty/cube	A = 80 B = 80 C = 80 D = 60 E = 60	
Weight/cube	1467 kg	3234 lb

Code	Colour - Prestige
127001183	Range Amber Beige
127001181	Range Scandina Grey
127001182	Rockland Black
Colour - Standard	
127001983	Range Newport Grey

Production location Montreal

1 bag of Techniseal sand covers approx.: 160 ft<sup>2</sup>

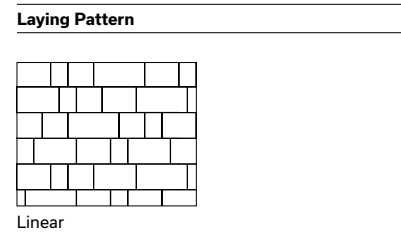

**Technical Information**

Product	Capio Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.