

# Vertex Slab

	Metric (mm)	Imperial (in.)
	60 x 200 and 302 x 610	2 3/8 x 7 7/8 and 11 7/8 x 24
Weight/unit	39 kg	85 lb
Area/unit	0.153 m <sup>2</sup>	1.65 ft <sup>2</sup>
Area/layer	1.22 m <sup>2</sup>	13.17 ft <sup>2</sup>
Area/cube	12.2 m <sup>2</sup> 10 Rows	131.7 ft <sup>2</sup>
Qty/cube	80 units	80 units
Weight/cube	1725 kg	3803 lb

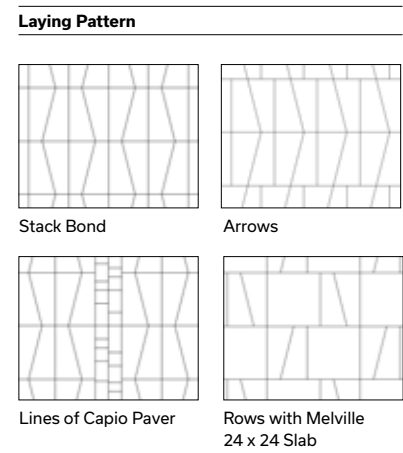

Code	Colour - Prestige
127001178	Range Amber Beige
127001179	Range Scandina Grey

Production location	Quebec
Sold in full cubes	

1 bag of Techniseal sand covers approx.: 207 ft<sup>2</sup>



**Technical Information**

Product	Vertex Slab
Standard	CSA A231.1
Flexural Strength	±4.5 MPa
Compressive Strength	N/A
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

\* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.