



Melville® 80 and Melville® 80 DuraFusion Pavers

	Metric (mm)	Imperial (in.)
A	80 x 190 x 380	3 1/8 x 7 1/2 x 15
B	80 x 380 x 380	3 1/8 x 15 x 15
C	80 x 380 x 570	3 1/8 x 15 x 22 7/16
Weight/unit (avg.)	25 kg	56 lb
Unit/area (avg.)	7.39 units/m ²	0.69 unit/ft ²
Area/layer	1.08 m ²	11.66 ft ²
Area/cube	8.64 m ² 8 Rows	93.28 ft ²
Length/row	3.04 lin. m	9.97 lin. ft
Length/cube	24.32 lin. m	79.79 lin. ft
Weight/cube	1625 kg	3583 lb

Code	Colour - DuraFusion
127003275	Amber  N
127003121	Newport  N
127003088	Scandina  N
	Colour - Prestige
10550869	Range Amber Beige
10550447	Range Margaux Beige
10554764	Range Chambord Grey
10550446	Range Scandina Grey
10550557	Rockland Black
	Colour - Standard
10550868	Range Shaded Grey
10550558	Range Newport Grey

Production location	DuraFusion: Milton
	Prestige and Standard: Milton
	Rockland Black: Metcalfe

1 bag of Techniseal sand covers approx.: 160 ft²

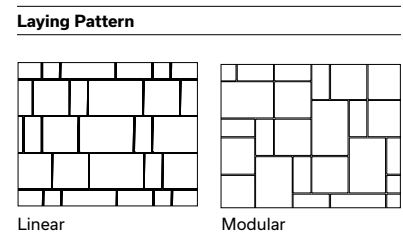

Technical Information	
Product	Melville 80 Paver and Melville 80 DuraFusion Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.