

Wallstone® Wall

Standard	Metric (mm)	Imperial (in.)
	100 x 200 x 300	3 15/16 x 7 7/8 x 11 13/16
Weight/unit	13.3 kg	29.3 lb
Unit/area	-	3.10 units/ft²
Area/cube	-	34.80 ft²
Length/cube	-	106.30 lin. ft
Qty/cube	108 units	108 units
Weight/cube	1436 kg	3165 lb

Code	Colour
16259322	Desert Grey Blend
16259323	Granite Blend


Production location Cambridge
Sold by layer - Split charge applicable

Corner/Column	Metric (mm)	Imperial (in.)
	100 x 200 x 300	3 15/16 x 7 7/8 x 11 13/16
Weight/unit	13.10 kg	28.90 lb
Unit/area	-	0.54 ft²
Qty/cube	36 units	36 units
Weight/cube	595 kg	1312 lb


Code	Colour
16259316	Desert Grey Blend
16259317	Granite Blend

Production location Cambridge
Sold by piece - Split charge applicable


Typical Row




Typical Row




Laying Pattern

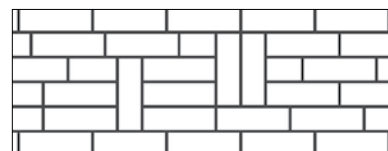

Pattern 1:
Place Wallstone standard units vertically and horizontally to create interesting patterns within the wall.

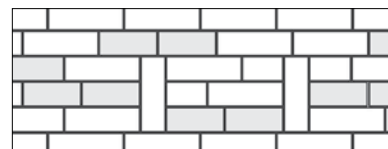

Pattern 2:
Add an additional dimension to your wall by including Wedgestone wall units in your pattern (shaded). Consider recessing blocks to add further distinction. Except for the coping course, it is not recommended to set units forward beyond the front of the base course.

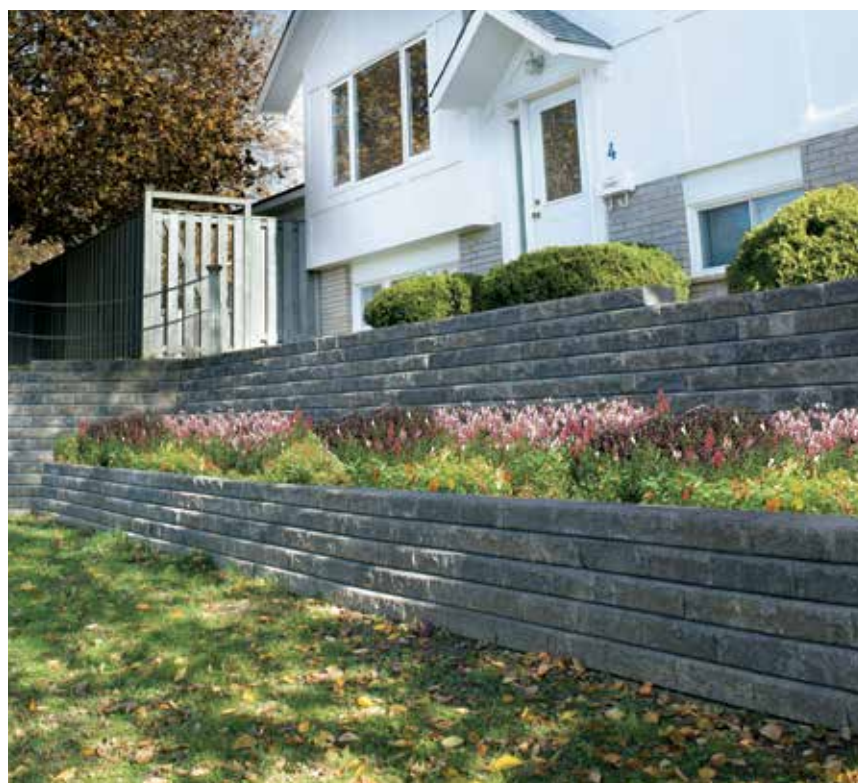

Technical Information

Product	Wallstone Wall
Standard	ASTM C 1372
Flexural Strength	N/A
Compressive Strength	20.7 MPa
De-icing salts freeze-thaw durability	N/A
Density	2000 kg/m²
Absorption	10.4%
Dimension Tolerance*	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

Applications: Retaining walls MAX 10 m (3.3 ft) Additional details: See our landscaping installation guide on our website.


Wallstone and Wedgestone Wall can be used separately or in combination for greater flexibility. **Features:** Suitable for gravity or grid, vertical or setback, straight or curved walls. All Wallstone Wall units come pre-split. End grooves on Wallstone Standard Units maintain interlock between courses, even when placed vertically. 2/3 of Standard Units are also double rock-faced. **Tips:** Patterned Wallstone walls can be stacked vertically up to 6 courses high.

Melville® Plus Step

Step 60	Metric (mm)	Imperial (in.)
	60 x 400 x 600	2 3/8 x 15 3/4 x 23 5/8
Weight/unit	33 kg	72 lb
Length/cube	16.80 lin. m	55.09 lin. ft
Qty/cube	28 units	7 Rows
Weight/cube	947 kg	2083 lb

Code	Colour
16253931	Range Amber Beige
16253918	Range Scandina Grey
16253919	Range Shaded Grey
16253917	Rockland Black


Production location	Metcalfe
Can be double stacked	



Step 90	Metric (mm)	Imperial (in.)
	90 x 400 x 600	3 9/16 x 15 3/4 x 23 5/8
Weight/unit	50 kg	109 lb
Length/cube	16.80 lin. m	55.09 lin. ft
Qty/cube	28 units	7 Rows
Weight/cube	1418 kg	3126 lb

Code	Colour
16253734	Range Amber Beige
16253739	Range Margaux Beige
16253932	Range Newport Grey
16253733	Range Scandina Grey
16253737	Range Shaded Grey
16253738	Rockland Black

Production location	Metcalfe
Can be double stacked	



Technical Information

Product	Melville Plus Step
Standard	N/A
Flexural Strength	N/A
Compressive Strength	35 MPa
De-icing salts freeze-thaw durability	500 g/m ²
Density	2250 kg/m ³
Absorption	5%
Dimension Tolerance*	Length: ±2.0 mm Width: ±2.0 mm Height: -2.0 to +1.0 mm

Additional details: See our landscaping installation guide on our website.