



Esbelto® and Esbelto® DuraFusion Slabs

	Metric (mm)	Imperial (in.)
	60 x 305 x 610	2 3/8 x 12 x 24
Weight/unit	26 kg	57 lb
Area/unit	0.186 m²	2.00 ft²
Area/layer	1.11 m²	12.00 ft²
Area/cube	11.10 m² 10 Rows	120.00 ft²
Qty/cube	60 units	60 units
Weight/cube	1546 kg	3409 lb

Code	Colour - DuraFusion
127003272	Amber  N
127003118	Newport  N
127003085	Scandina  N
	Colour - Prestige
12051114	Range Amber Beige
12051112	Range Scandina Grey

Production location	DuraFusion: Milton
	Prestige: Montreal

1 bag of Techniseal sand covers approx.: 235 ft²

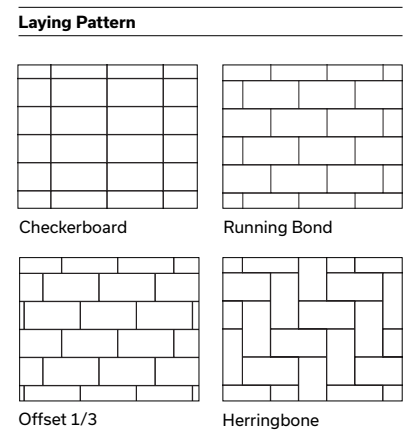

Technical Information	
Product	Esbelto Slab and Esbelto DuraFusion Slab
Standard	CSA A231.1
Flexural Strength	±4.5 MPa
Compressive Strength	N/A
De-icing salts freeze-thaw durability	225 g/m² after 28 cycles 500 g/m² after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.