



# Melville® 80 Small Rectangle Paver

	Metric (mm)	Imperial (in.)
	80 x 190 x 380	3 1/8 x 7 1/2 x 15
Weight/unit	18 kg	39 lb
Unit/area	13.89 units/m <sup>2</sup>	1.29 units/ft <sup>2</sup>
Area/layer	0.87 m <sup>2</sup>	9.33 ft <sup>2</sup>
Area/cube	7.83 m <sup>2</sup> 9 Rows	83.97 ft <sup>2</sup>
Length/layer	4.57 lin. m	15.00 lin. ft
Length/cube	41.15 lin. m	135.00 lin. ft
Qty/cube	108 units	108 units
Weight/cube	1478 kg	3260 lb

Code	Colour - Prestige
10550871	Range Amber Beige
10551033	Rockland Black
10551031	Range Scandina Grey
Colour - Standard	
10550870	Range Shaded Grey

Production location Montreal and Quebec  
Can be double stacked

1 bag of Techniseal sand covers approx.: 110 ft<sup>2</sup>

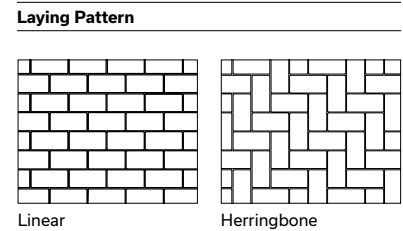

Technical Information	
Product	Melville 80 Small Rectangle Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.