



# Mondrian® Plus 80 Small Rectangle Paver

	Metric (mm)	Imperial (in.)
	80 x 165 x 330	3 1/8 x 6 1/2 x 13
Weight/unit	10 kg	21 lb
Unit/area	18.52 units/m <sup>2</sup>	1.71 units/ft <sup>2</sup>
Area/layer	0.82 m <sup>2</sup>	8.79 ft <sup>2</sup>
Area/cube	7.38 m <sup>2</sup> 9 Rows	79.11 ft <sup>2</sup>
Length/row	4.95 lin. m	16.25 lin. ft
Length/cube	59.43 lin. m	195.00 lin. ft
Qty/cube	135 units	135 units
Weight/cube	1302 kg	2871 lb

Code	Colour - Prestige
10550516	Rockland Black

Production location	Metcalfe
Can be double stacked	

1 bag of Techniseal sand covers approx.: 34 ft<sup>2</sup>

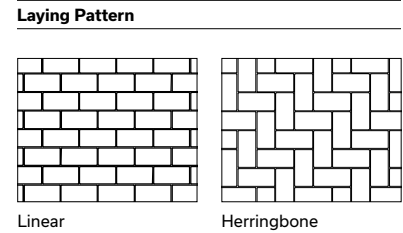

Technical Information	
Product	Mondrian Plus 80 Small Rectangle Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Additional details: See our landscaping installation guide on our website (Permeable pavement section).