

Trafalgar® 60 Paver

	Metric (mm)	Imperial (in.)
A	60 x 100 x 200	2 3/8 x 3 15/16 x 7 7/8
B	60 x 200 x 200	2 3/8 x 7 7/8 x 7 7/8
C	60 x 300 x 200	2 3/8 x 11 13/16 x 7 7/8
Weight/unit (avg.)	6 kg	12 lb
Unit/area (avg.)	23.96 units/m ²	2.32 units/ft ²
Area/layer	0.96 m ²	11.63 ft ²
Area/cube	10.56 m ² 10 Rows	116.30 ft ²
Qty/cube	A = 80 B = 80 C = 100	
Length/row	5.40 lin. m	17.72 lin. ft
Length/cube	54.01 lin. m	177.20 lin. ft
Weight/cube	1441 kg	3178 lb

Code	Colour - Prestige
10550442	Range Margaux Beige
	Colour - Standard
10550368	Range Norvick Grey
10550370	Range Newport Grey


Production location	Metcalfe
---------------------	----------

1 bag of Techniseal sand covers approx.: 59 ft²

Typical Row

A	A	A	A	A	A
B	C	C	A	B	
C	C	C	C	C	
B	B	B	B	B	B
C	C	C	C	C	

Laying Pattern

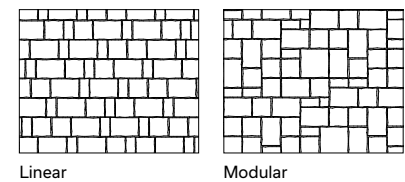

Linear

Modular



Technical Information

Product	Trafalgar 60 Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Additional details: See our landscaping installation guide on our website (Permeable pavement section).