

# Cassara® Large Rectangle Paver


	Metric (mm)	Imperial (in.)
	100 x 300 x 700	4 x 11 13/16 x 27 9/16
Weight/unit	48 kg	106 lb
Unit/area	4.76 units/m <sup>2</sup>	0.44 unit/ft <sup>2</sup>
Area/layer	0.63 m <sup>2</sup>	6.78 ft <sup>2</sup>
Area/cube	5.04 m <sup>2</sup> 8 Rows	54.24 ft <sup>2</sup>
Length/layer	2.10 lin. m	6.89 lin. ft
Length/cube	16.80 lin. m	55.13 lin. ft
Qty/cube	24 units	24 units
Weight/cube	1160 kg	2557 lb

Code	Colour - Prestige
10200758	Range Scandina Grey
10200565	Range Amber Beige
Colour - Standard	
10200564	Range Shaded Grey


Production location Montreal

1 bag of Techniseal sand covers approx.: 97 ft<sup>2</sup>


## Typical Row



## Laying Pattern



Linear

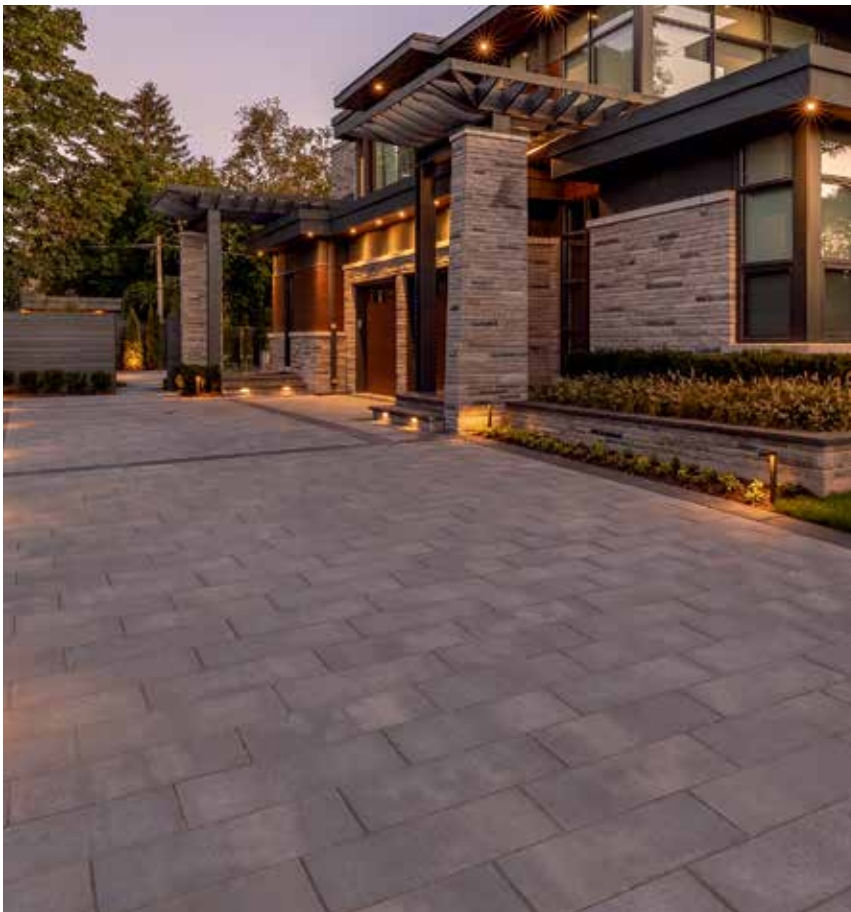

## Technical Information

Product	Cassara Large Rectangle Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Given the weight of this paver, it is highly recommended to use suction-based lifting equipment for handling and placement (avoid manual installation).