

Kensington Smooth Paver

RECTANGLE	Metric (mm)	Imperial (in.)
	80 x 209 x 279	3 1/8 x 8 1/4 x 11
Weight/unit	10 kg	23 lb
Units/area	-	1.55 units/ft ²
Area/section	-	23.17 ft ²
Area/cube	-	91.14 ft ²
Length/section	-	25 lin. ft
Length/cube	-	100 lin. ft
Qty	144 units/cube	36 units/section
Weight	1498 kg	3304 lb

Code	Colour
10506699	Sierra Black




Production location	Milton
Sold in full cubes	

MIXED BUNDLE	Metric (mm)	Imperial (in.)
C	80 x 279 x 419	3 1/8 x 11 x 16 1/2
Weight/unit	21.36 kg	47.10 lb
Units/area	-	0.78 unit/ft ²
Qty/cube	36 units	36 units
B	80 x 279 x 279	3 1/8 x 11 x 11
Weight/unit	14.33 kg	31.60 lb
Units/area	-	1.17 units/ft ²
Qty/cube	36 units	36 units
A	80 x 139 x 279	3 1/8 x 5 1/2 x 11
Weight/unit	7.07 kg	15.60 lb
Units/area	-	2.32 units/ft ²
Qty/cube	36 units	36 units
Area/cube	-	91.14 ft ²
Weight/cube	1531 kg	3375 lb

Code	Colour
10506622	Ash Grey Blend
10506693	Canyon Grey Blend
10506694	Desert Grey Blend
10506692	Granite Blend

Production location	Milton
Sold in full cubes	

1 bag of Techniseal sand covers approx.: 37 ft²

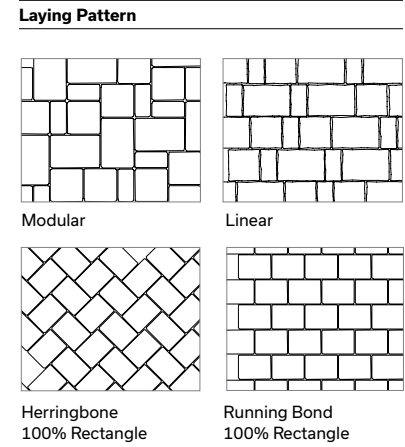

Technical Information

Product	Kensington Smooth Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
Runoff coefficient (mixed bundle):	247 in per hour

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.