

# Vendome® 60 and 80 Paver



60 mm - Not vehicular	Metric (mm)	Imperial (in.)
A	60 x 130 x 197	2 3/8 x 5 1/8 x 7 3/4
B	60 x 130 x 262	2 3/8 x 5 1/8 x 10 5/16
C	60 x 130 x 327	2 3/8 x 5 1/8 x 12 7/8
Weight/unit (avg.)	4 kg	9 lb
Unit/area (avg.)	30.50 units/m <sup>2</sup>	2.83 units/ft <sup>2</sup>
Area/layer	1.05 m <sup>2</sup>	11.28 ft <sup>2</sup>
Area/cube	8.40 m <sup>2</sup> 8 Rows	90.24 ft <sup>2</sup>
Length/row	7.86 lin. m	25.80 lin. ft
Length/cube	62.90 lin. m	206.40 lin. ft
Weight/cube	1044 kg	2302 lb

Code	Colour - Prestige
10554763	Rockland Black
10554761	Range Margaux Beige
Colour - Standard	
10554762	Range Newport Grey

Production location    Bolton



1 bag of Techniseal sand covers approx.: 44 ft<sup>2</sup>

80 mm	Metric (mm)	Imperial (in.)
A	80 x 130 x 197	3 1/8 x 5 1/8 x 7 3/4
B	80 x 130 x 262	3 1/8 x 5 1/8 x 10 5/16
C	80 x 130 x 327	3 1/8 x 5 1/8 x 12 7/8
Weight/unit (avg.)	5 kg	12 lb
Unit/area (avg.)	30.50 units/m <sup>2</sup>	2.83 units/ft <sup>2</sup>
Area/layer	1.05 m <sup>2</sup>	11.28 ft <sup>2</sup>
Area/cube	8.40 m <sup>2</sup> 8 Rows	90.24 ft <sup>2</sup>
Qty/cube	A = 88    B = 96    C = 72	
Length/row	7.86 lin. m	25.80 lin. ft
Length/cube	62.90 lin. m	206.40 lin. ft
Weight/cube	1382 kg	3047 lb

Code	Colour - Prestige
10550002	Rockland Black
10559011	Range Margaux Beige
Colour - Standard	
10559010	Range Newport Grey

Production location    Bolton

1 bag of Techniseal sand covers approx.: 33 ft<sup>2</sup>

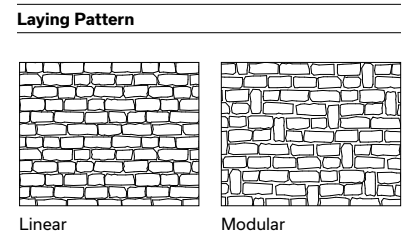

**Technical Information**

Product	Vendome Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
Runoff coefficient:	126 in. per hour

Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Additional details: See our landscaping installation guide on our website (Permeable pavement section).