


Wedgestone® Wall

Standard	Metric (mm)	Imperial (in.)
	100 x 200 x 231 - 153	3 15/16 x 7 7/8 x 9 3/32 - 6
Weight/unit	9.27 kg	20.04 lb
Unit/area	-	4.00 units/ft ²
Area/cube	-	37.20 ft ²
Length/cube	-	113.60 lin. ft
Qty/cube	150 units	150 units
Weight/cube	1390 kg	3064 lb


Code	Colour
16259334	Desert Grey Blend
16259335	Granite Blend

Production location	Cambridge
Sold by layer - Split charge applicable	


Typical Row




Laying Pattern




Top View

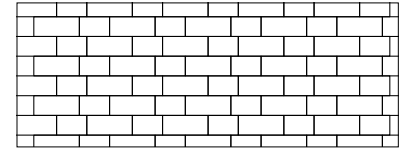

Pattern 1



Top View

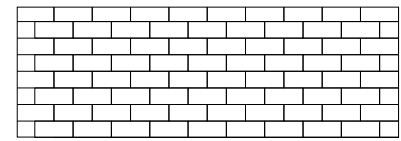

Pattern 2



Technical Information

Product	Wedgestone Wall
Standard	ASTM C 1372
Flexural Strength	N/A
Compressive Strength	20.7 MPa
De-icing salts freeze-thaw durability	N/A
Density	2000 kg/m ³
Absorption	10.4%
Dimension Tolerance*	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

Applications: Retaining walls MAX 0.7 m (2'4")

Wallstone and Wedgestone Wall can be used separately or in combination for greater flexibility. Features: Suitable for gravity or grid, vertical or setback, straight or curved walls. All Wedgestone Wall units come pre-split. Wedgestone Wall units are 100% double rock-faced and reversible for inside and outside curves. Units create a 600 mm (2') outside radius without cutting. **Tips:** 4 Wedgestone Wall units are required for a rounded 90° corner, 16 pcs for a full circle.

Melville® Plus Capping [≡]

Capping 60	Metric (mm)	Imperial (in.)
	60 x 305 x 600	2 3/8 x 12 x 23 5/8
Weight/unit	25 kg	56 lb
Units/length	1.67 units/lin. m	0.51 unit/lin. ft
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	25.20 lin. m	82.67 lin. ft
Qty/cube	42 units 7 Rows	42 units
Weight/cube	1081 kg	2381 lb



Code	Colour
16253909	Range Amber Beige
16253908	Range Margaux Beige
16253906	Range Newport Grey
16253907	Range Scandina Grey
16253916	Range Shaded Grey
16253692	Rockland Black

Production location Milton
Can be double stacked

Capping 90	Metric (mm)	Imperial (in.)
	90 x 305 x 600	3 9/16 x 12 x 23 5/8
Weight/unit	39 kg	86 lb
Units/length	1.67 units/lin. m	0.51 unit/lin. ft
Length/row	3.60 lin. m	11.81 lin. ft
Length/cube	25.20 lin. m	82.67 lin. ft
Qty/cube	42 units 7 Rows	42 units
Weight/cube	1624 kg	3580 lb

Code	Colour
121000150	Range Amber Beige
121000149	Range Newport Grey
121000148	Range Scandina Grey
121000147	Rockland Black

Production location Milton
Can be double stacked



Technical Information

Product	Melville Plus Capping
Standard	ASTM C 1372
Flexural Strength	N/A
Compressive Strength	20.7 MPa
De-icing salts freeze-thaw durability	N/A
Density	2000 kg/m ²
Absorption	10.4%
Dimension Tolerance*	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

Additional details: See our landscaping installation guide on our website.