



# Wilfrid Slab

	Metric (mm)	Imperial (in.)
A	60 x 570 x 380	2 3/8 x 22 7/16 x 15
B	60 x 570 x 570	2 3/8 x 22 7/16 x 22 7/16
C	60 x 570 x 950	2 3/8 x 22 7/16 x 37 3/8
Weight/unit (avg.)	53 kg	117 lb
Area/layer (avg.)	1.05 m <sup>2</sup>	11.66 ft <sup>2</sup>
Area/cube	9.72 m <sup>2</sup>	104.94 ft <sup>2</sup>
Weight/cube	1422 kg	3150 lb

Code	Colour - Prestige
12051189	Range Amber Beige
12051213	Range Scandina Grey
Colour - Standard	
127000957	Range Newport Grey

Production location Milton

1 bag of Techniseal sand covers approx.: 347 ft<sup>2</sup>

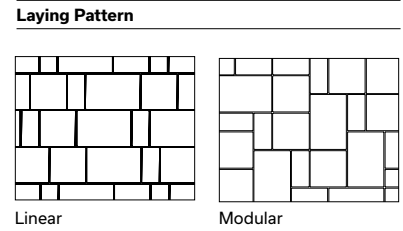

**Technical Information**

Product	Wilfrid Slab
Standard	CSA A231.1
Flexural Strength	±4.5 MPa
Compressive Strength	N/A
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

\* Concave or convex warpage in one dimension: up to and including 450 mm: 2.0 mm / over 450 mm: 3.00 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.