
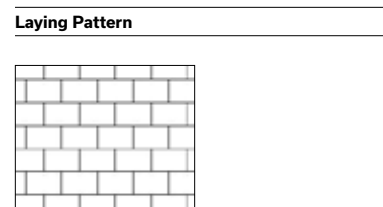


# Paleo-Tec Paver Heavy Commercial

	Metric (mm)	Imperial (in.)
	100 x 140 x 220	4 x 5 1/2 x 8 5/8
Weight/unit	6.80 kg	15.00 lb
Unit/area	32.50 units/m <sup>2</sup>	3.00 units/ft <sup>2</sup>
Area/layer	0.99 m <sup>2</sup>	10.62 ft <sup>2</sup>
Area/cube	5.92 m <sup>2</sup>	63.72 ft <sup>2</sup>
Length/row	7.01 lin. m	23.00 lin. ft
Length/cube	42.06 lin. m	138.00 lin. ft
Weight/cube	1306 kg	2880 lb



Linear

Code	Colour
10102026	Light Grey
10109059	Range Brownstone Red
10109067	Range Norvick Grey
10103056	Rockland Black

Production location	Woodstock
---------------------	-----------



## Technical Information

Product	Paleo-Tec Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.