

Curbs and Accessories Index

Curbs

Typical Cross-Section	288
Celtik Curb	289

Capping

Pool Capping Cross-Section	290
----------------------------	-----

Steps

Steps Installation - Typical Details	291
Mega Melville Plus and Mega Lafitt Plus Steps	292
Marina 60 Capping (Step option)	293
Celtik 15 inch Modular Step System	294

Mirage Porcelain Tiles

November	295
----------	-----

PACKAGING

For product packaging information, please refer to our Product Data Guide on our website.



English
Quebec




English
Ontario

NOTE: Please note that only curbs and accessories with specific notes are included in the guide. For information on our entire product line, please see our product guide.

Curbs


TYPICAL INSTALLATION

TYPICAL PAVER INSTALLATION WITH MELVILLE CURB, LAFITT CURB OR CELTIK CURB

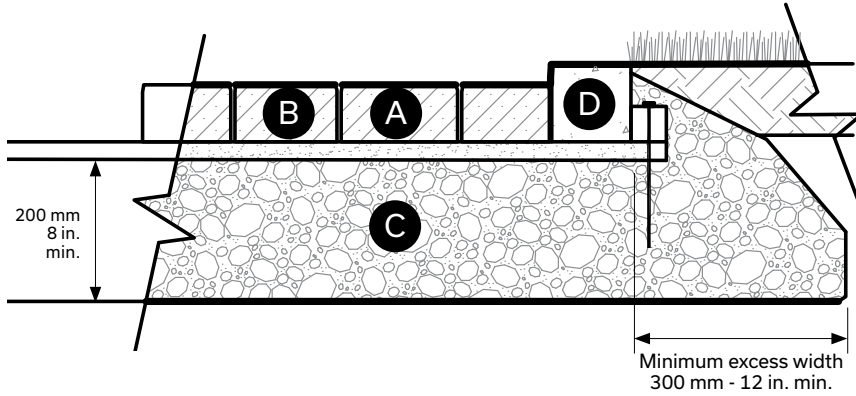

- A Paving stones
- B Installation bed 25 mm - 1 in. (concrete sand)
- C Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in.
- D Curb

TYPICAL PAVER INSTALLATION WITH NOVO CURB

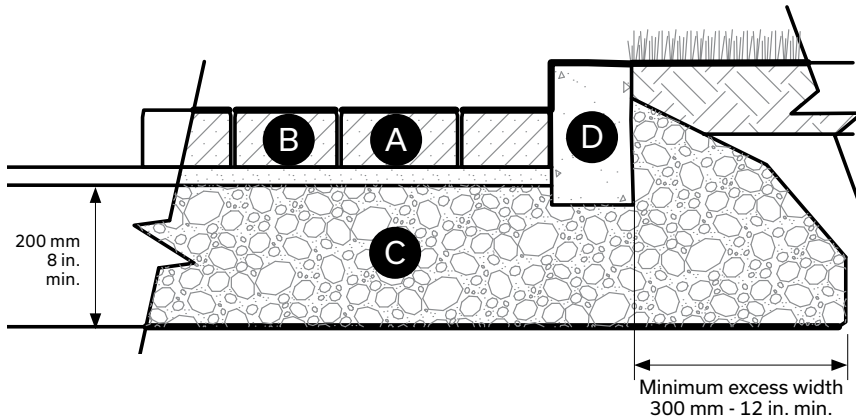




- A Paving stones
- B Installation bed 25 mm - 1 in. (concrete sand)
- C Compacted granular foundation: 0 to 20 mm - 0 to 3/4 in.
- D Novo curb

Celtik® Curb

SPECIFIC DETAILS




UNITS

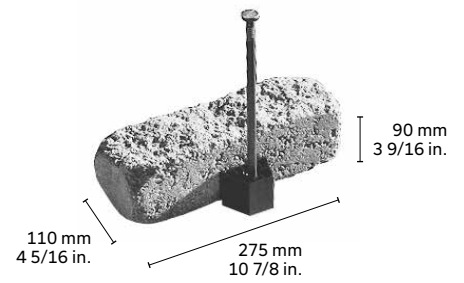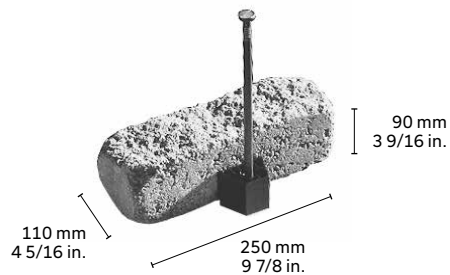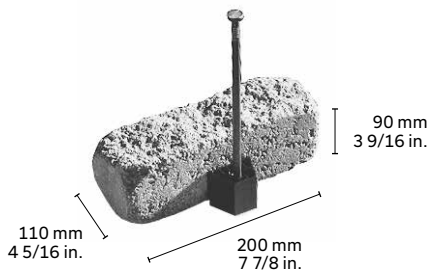


C3-ANCHORS


NOTE: in order to facilitate orders by half layer (13 lin.ft.) each row must include 2 boxes of anchors. Each box contains 16 C3-anchors and 16 nails.




LAYING IDEAS

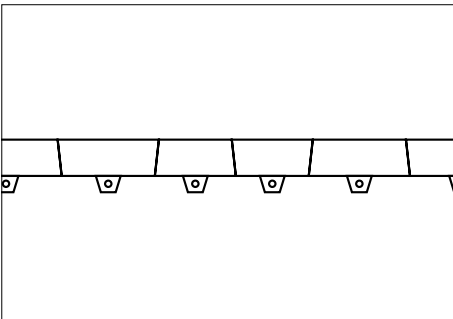

For a straight line curb, use alternating angled curb units.

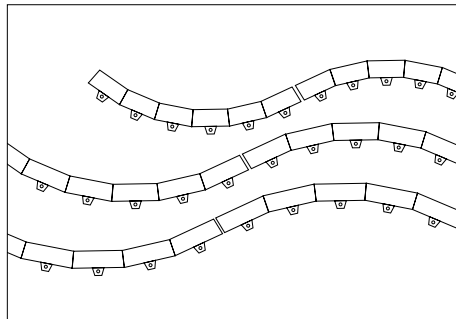

For a concave or convex curve, lay curb units in the same direction.

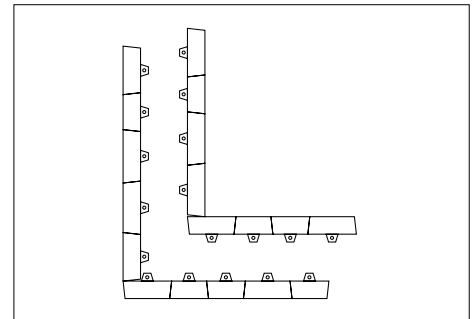

For a 90° corner, simply align curb units at this angle.