



# New Colosseo Block




- Two choices of sizing, both with an architectural bloc look and finished corners on all units
- Smooth texture on both faces—can be installed on either side
- Cored block, which provides increased adhesion to mortar and eases the installation (lighter units)
- Ideal for institutional, commercial, industrial projects that require fast and economical installation




	A	B
Weight per cube (kg)	1 404	2 132
Rows per cube	5	4
Sq.ft. per row	19.14	19.31
Sq.ft. per cube	95.72	77.24
Corner pieces	100%	100%
Lin. ft. per row	30.71	30.97
Lin. ft. per cube	153.54	123.88
Qty per cube	120 units	64 units

A	90 mm x 190 mm x 390 mm	4" x 8" x 16"
B	90 mm x 190 mm x 590 mm	4" x 8" x 24"




**A** (Sold separately)




**B** (Sold separately)

**Laying Patterns:**

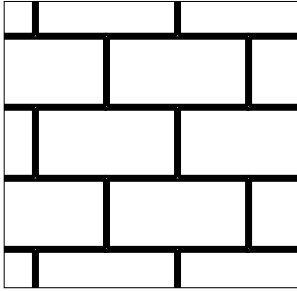


Running Bond - 8 in. x 16 in.

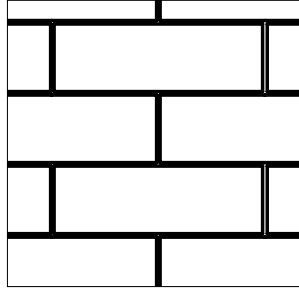


Running Bond - 8 in. x 24 in.

**Typical Rows:**

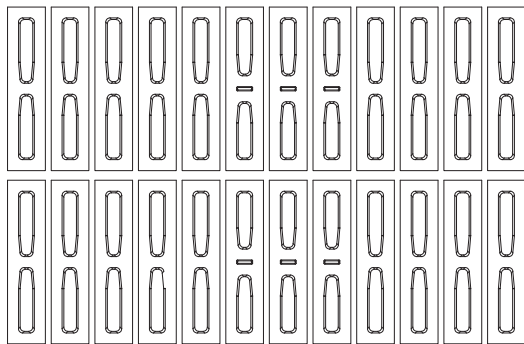

8 x 16

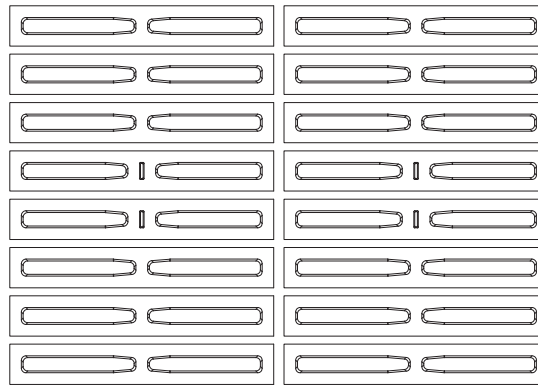

8 x 24

**Technical information**

Product	Standard	Compressive Strength	Density	Absorption	Dimension Tolerance	Fire Resistance (CNB)
<b>Colosseo Block 8 x 16</b>	CSA A165.1	15 MPa	A : Over 2000 kg/m <sup>3</sup>	A : 175 kg/m <sup>3</sup>	Thickness: ±2.0 mm Height: ±2.0 mm Length: ±3.0 mm	0.80 hours
<b>Colosseo Block 8 x 24</b>	CSA A165.1	15 MPa	A : Over 2000 kg/m <sup>3</sup>	A : 175 kg/m <sup>3</sup>	Thickness: ±2.0 mm Height: ±2.0 mm Length: ±3.0 mm	0.80 hours