



Boulevard TLI 90 Crescendo 320 Paver



smooth	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth

textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
Cambrian Black - Granitech	




	Dimensions mm	Dimensions in.
A	90 x 320 x 240	3 1/2 x 12 5/8 x 9 1/2
B	90 x 320 x 320	3 1/2 x 12 5/8 x 12 5/8
C	90 x 320 x 360	3 1/2 x 12 5/8 x 14 3/16
D	90 x 320 x 400	3 1/2 x 12 5/8 x 15 3/4
E	90 x 320 x 440	3 1/2 x 12 5/8 x 17 5/16
Cube ft²	86.8	12.4 per row


Mass/ft²	19.36 kg	42.6 lb
Mass/ft²	20.65 kg	45.4 lb
Mass/ft²	25.55 kg	56.2 lb

Sold separately


Typical Row




Laying Patterns



Linear



Linear
50% ABCDE + 50%
Large Rectangle




Linear
Small Rectangle

TECHNICAL INFORMATION


Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 90 Crescendo 320 Paver							
320 x 240							
320 x 320	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
320 x 360							
320 x 400							
320 x 440							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

Boulevard TLI 100 Crescendo 300 Paver

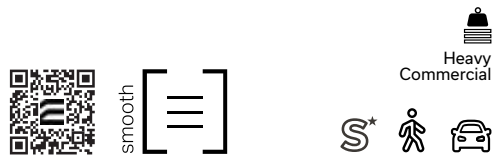


smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth






	Dimensions mm	Dimensions in.
A	100 x 300 x 400	4 x 11 13/16 x 15 3/4
B	100 x 300 x 500	4 x 11 13/16 x 19 11/16
C	100 x 300 x 600	4 x 11 13/16 x 23 5/8
Unit/area	22.8 kg	50.16 lb
Cube ft²	77.52	9.69 per row

Mass/ft²	22.8 kg	50.16 lb
Units are not sold separately		

Typical Row

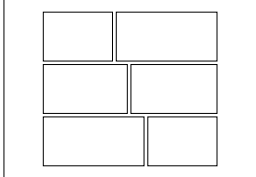

Laying Patterns



		
Linear	Linear 70% ABC + 30% D	Linear 100% D

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 100 Crescendo 300 Paver							
300 x 400	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
300 x 500							Width: -1.0 to +2.0 mm
300 x 600							Height: ±3.0 mm

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.


Boulevard TLI 150 Crescendo 125 Paver



smooth



Colour
White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth
Red - Smooth


textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

		Dimensions mm	Dimensions in.
A	A	150 x 125 x 333.33	5 7/8 x 4 15/16 x 13 1/8
B	B	150 x 125 x 416.67	5 7/8 x 4 15/16 x 16 3/8
C	C	150 x 125 x 458.33	5 7/8 x 4 15/16 x 18
D	D	150 x 125 x 500	5 7/8 x 4 15/16 x 19 11/16
E	E	150 x 125 x 541.67	5 7/8 x 4 15/16 x 21 5/16
F	F	150 x 125 x 583.33	5 7/8 x 4 15/16 x 23
	Cube ft²	53.80	10.76 per row
	Cube ft²	53.80	10.76 per row
	Cube ft²	43.04	10.76 per row


Mass/ft²	32.6 kg	71.7 lb
Mass/ft²	34.4 kg	75.7 lb
Mass/ft²	43.6 kg	95.9 lb

Units are not sold separately

Typical Row



Laying Pattern




Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 125 Paver							
125 x 333.33							
125 x 416.67							
125 x 458.33	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
125 x 500							
125 x 541.67							
125 x 583.33							


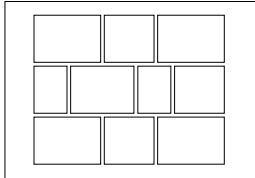




Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.

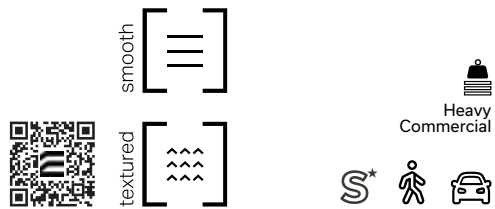Boulevard TLI 150 Crescendo 320 Paver



smooth [≡]	Colour
	White - Smooth
	Cinder Grey - Smooth
	Charcoal - Smooth
	Light Charcoal - Smooth
	Black ETX - Smooth
	Light Grey - Smooth
	Beige Grey - Smooth
	Beige - Smooth
	Red - Smooth


textured [≡≡≡]	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech

		Dimensions mm	Dimensions in.				Typical Row
				Mass/ft²			
A		A 150 x 320 x 240	5 7/8 x 12 5/8 x 9 1/2	32.6 kg	71.7 lb		
B		B 150 x 320 x 320	5 7/8 x 12 5/8 x 12 5/8	34.4 kg	75.7 lb		
C		C 150 x 320 x 360	5 7/8 x 12 5/8 x 14 3/16	43.6 kg	95.9 lb		
D		D 150 x 320 x 400	5 7/8 x 12 5/8 x 15 3/4				
E		E 150 x 320 x 440	5 7/8 x 12 5/8 x 17 5/16				
		Cube ft²	49.6	12.4 per row			
		Cube ft²	49.6	12.4 per row			
		Cube ft²	37.2	1.4 per row			

Mass/ft²	32.6 kg	71.7 lb
Mass/ft²	34.4 kg	75.7 lb
Mass/ft²	43.6 kg	95.9 lb

Units are not sold separately

Laying Pattern





Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 150 Crescendo 320 Paver							
125 x 500	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m² after 28 cycles 500 g/m² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm
250 x 500							Width: -1.0 to +2.0 mm
500 x 500							Height: ±3.0 mm
750 x 500							
200 x 200							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.


Boulevard TLI 200 Crescendo 300 Paver



smooth

[≡]


Colour
White - Smooth
Cinder Grey - Smooth
Charcoal - Smooth
Light Charcoal - Smooth
Black ETX - Smooth
Light Grey - Smooth
Beige Grey - Smooth
Beige - Smooth
Red - Smooth

textured	Colour
	Cinder Grey - Granitech
	Light Charcoal - Granitech
	Charcoal - Granitech
	Light Grey - Granitech
	Beige Grey - Granitech
	Beige - Granitech
	Opal White - Granitech
	Stanstead Grey - Granitech
	Cambrian Brown - Granitech
	Cambrian Black - Granitech


		Dimensions mm	Dimensions in.
	A	200 x 300 x 300	7 7/8 x 11 13/16 x 11 13/16
	B	200 x 300 x 412.5	7 7/8 x 11 13/16 x 16 1/4
	C	200 x 300 x 487.5	7 7/8 x 11 13/16 x 19 3/16
	D	200 x 300 x 525	7 7/8 x 11 13/16 x 20 5/8
	E	200 x 300 x 562.5	7 7/8 x 11 13/16 x 22 1/8
	F	200 x 300 x 637.5	7 7/8 x 11 13/16 x 25 1/8
	G	200 x 300 x 675	7 7/8 x 11 13/16 x 26 9/16
Unit/area		16 units/m ²	1.49 units/ft ²
Cube ft ²		46.52	11.63 per row

Mass/ft ²	43.24 kg	95.12 lb
Mass/ft ²	45.64 kg	100.40 lb
Mass/ft ²	58.14 kg	127.90 lb

Units are not sold separately



Laying Pattern



Linear

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Boulevard TLI 200							
Crescendo 300 Paver							
300 x 300							
300 x 412.5							
300 x 487.5	CSA A231.2	N/A	μ 50 MPa ≥ 45 MPa	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles	N/A	N/A	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
300 x 525							
300 x 562.5							
300 x 637.5							
300 x 675							

Setting of joint-filling sand: Cover the vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover the snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches or concrete shards. Laying patterns: These laying patterns are by way of example only and represent only a few of many possibilities. Permacon shall not be responsible for the excess or shortage of pavers resulting from installation according to these laying patterns.