

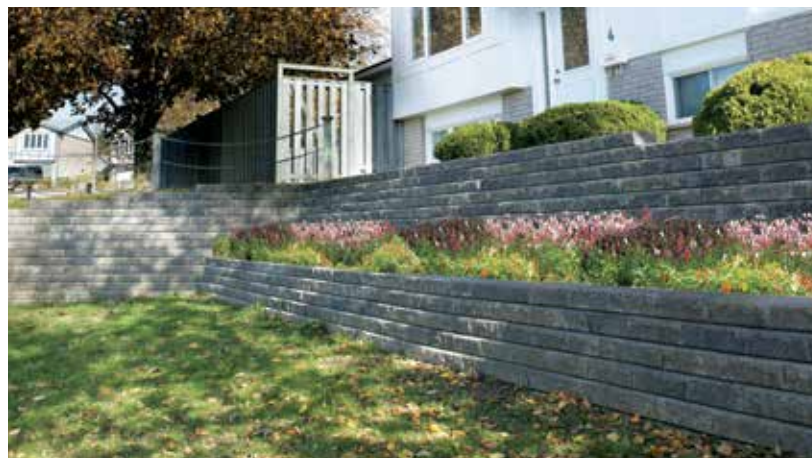




Wallstone® Wall




Standard	Dimensions mm		Dimensions in.	Code	Colour	Typical Row
		100 x 200 x 300	3 15/16 x 7 7/8 x 11 13/16	16259322	Desert Grey Blend	
	Weight/unit	13.3 kg	29.3 lb	16259323	Granite Blend	
	Unit/area	-	3.10 units/ft²	Sold by - 36 pieces Split charges apply Production location Cambridge		
	Area/cube	-	34.80 ft²			
	Length/cube	-	106.30 lin. ft			
	Qty/cube	108 units	108 units			
	Weight/cube	1436 kg	3165 lb			

<div>Corner/ Column</div> 	Dimensions mm	Dimensions in.
	100 x 200 x 300	3 15/16 x 7 7/8 x 11 13/16
	Weight/unit	13.10 kg 28.90 lb
	Unit/area	– 0.54 ft²
	Qty/cube	36 units 36 units
	Weight/cube	595 kg 1312 lb


Code	Colour
16259316	Desert Grey Blend
16259317	Granite Blend
Sold by piece	
Split charges apply	
Production location Cambridge	



Laying Patterns



PATTERN 1: WALL ART 1
Place Wallstone standard units vertically and horizontally to create interesting patterns within the wall.



PATTERN 2: WALL ART 2
Add an additional dimension to your wall by including Wedgestone wall units in your pattern (shaded). Consider recessing blocks to add further distinction. Except for the coping course, it is not recommended to set units forward beyond the front of the base course.

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Wallstone Wall	ASTM C 1372	N/A	20.7 MPa	N/A	2000 kg/m ³	10.4%	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

Applications: Retaining walls MAX 10 m (3.3 ft)

Additional details: See our landscaping installation guide on our website.



Wallstone and Wedgestone Wall can be used separately or in combination for greater flexibility.

Features: Suitable for gravity or grid, vertical or setback, straight or curved walls. All Wallstone Wall units come pre-split. End grooves on Wallstone Standard Units maintain interlock between courses, even when placed vertically. 2/3 of Standard Units are also double rock-faced.

Tips: Patterned Wallstone walls can be stacked vertically up to 6 courses high.

Wallstone 12 inch Capping



	Dimensions mm	Dimensions in.	Code	Colour	Typical Row <div></div>	
	100 x 200 x 300	3 15/16 x 7 7/8 x 11 13/16	16259305	Desert Grey Blend		
	Weight/unit	13.10 kg	28.90 lb	16259306		Granite Blend
	Units/length	-	3.1 units/ft²	Sold by 18 pieces		
	Length/row	-	106.30 lin. ft	Split charges apply		
	Qty/cube	108 units	108 units	Production location Cambridge		
Weight/cube	1433 kg	3159 lb				



TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Wallstone 12-inch Capping	ASTM C 1372	N/A	20.7 MPa	N/A	2000 kg/m ²	10.4%	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

Accessories

Wedgestone Capping



	Dimensions mm	Dimensions in.	Code	Colour	Typical Row	
	100 x 200 x 231 / 153	3 15/16 x 7 7/8 x 9 3/32 / 6	16259328	Desert Grey Blend		
	Weight/unit	8.35 kg	18.40 lb	16259329		Granite Blend
	Length/cube	-	113.60 lin. ft	Sold by 25 pieces Split charges apply Production location Cambridge		
	Qty/cube	150 units	150 units			
	Weight/cube	1390 kg	3064 lb			

TECHNICAL INFORMATION

Product	Standard	Flexural Strength	Compressive Strength	De-icing salts freeze-thaw durability	Density	Absorption	Dimension Tolerance*
Wedgestone Capping	ASTM C 1372	N/A	20.7 MPa	N/A	2000 kg/m ²	10.4%	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm