



Vika Stone *New*



- Dimensions ideal for smaller areas
- Three heights in the same cube to simplify on-site management
- Fewer cuts and faster installation due to its modular format
- Fully finished corners

	MIX
Weight per cube (kg)	1250
Rows per cube	7
Sq.ft. per row	11.44
Sq.ft. per cube	80.08
Corner pieces	100%

A	90 mm x 56.5 mm x var.	3 1/2 in. x 2 1/4 in. x var.
B	90 mm x 123 mm x var.	3 1/2 in. x 4 7/8 in. x var.
C	90 mm x 190 mm x var.	3 1/2 in. x 7 1/2 in. x var.

Code	Colour
169002144	Range Chambord Grey
169002143	Range Newport Grey
169002145	Oasis



[A]





[B]



[C]


Suggested Laying Pattern:

Modular

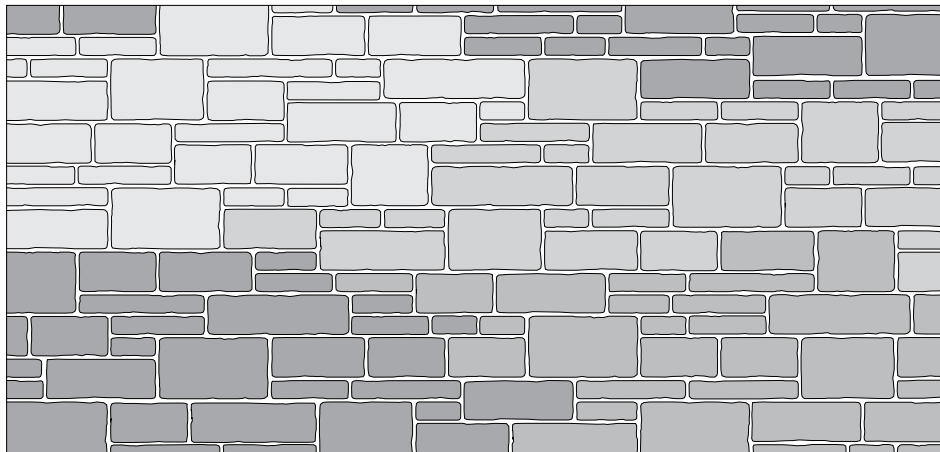


For information purposes only.
The pattern should be adapted
to the existing rows on the pallet
when installed.

Typical Row:

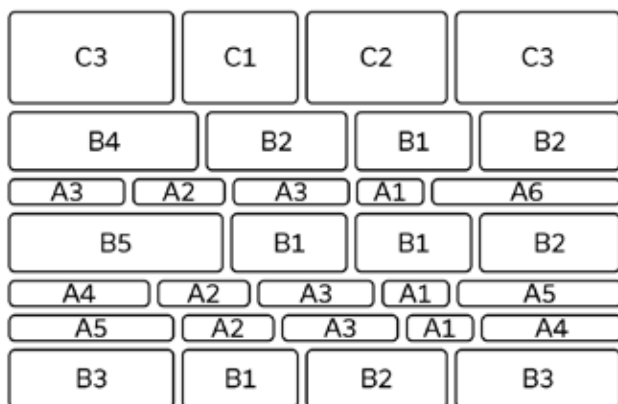

Mixed 3-height stones: small, medium and large

Sizes - Stone Cladding:

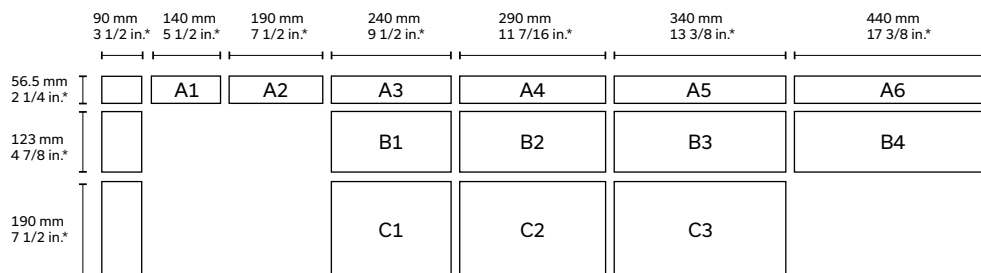

* Actual dimensions. Allow a 1/3 in. - 8 mm mortar joint in order to obtain nominal dimensions.

Technical information

Product	Standard	Compressive Strength	Density	Absorption	Dimension Tolerance	Fire Resistance (CNB)
Vika Stone	CSA A165.1	15 MPa	A : Over 2000 kg/m ³	A : 175 kg/m ³	Thickness: ±2.0 mm Height: ±2.0 mm Length: ±3.0 mm	1.39 hours