



## Melville Slik Brick

- Size lowers overall costs (materials and installation)
- Cored brick make it easier to install and provide increased adhesion to mortar
- Double sided and colour throughout

Colour	Code
Cameo Beige	25100801
Alpine Grey	25100132
Sterling Grey	25102331
Range Margaux Beige	25109021
Range Chambord Grey	25104441
Range Newport Grey	25102301
Range Scandina Grey	25104341
Rockland Black	25100032
Oasis	169000982
Terra	169000986
Lisbon <b>N</b>	25102482
Sepia <b>N</b>	25104371


Weight per cube (kg)	1456
Rows per cube	12
Sq.ft. per row	9.21
Sq.ft. per cube	110.47
Coverage	3.9 bricks
Qty per cube	432 bricks

<b>A</b>	90 x 79 x 257 mm	3 1/2 x 3 1/8 x 10 1/8 in.
<b>B</b>	90 x 79 x 257 - 212 mm	3 1/2 x 3 1/8 x 10 1/8 - 8 3/8 in.




# Melville Slik Brick

## Laying Pattern




1/2 Running Bond

## Typical Layout

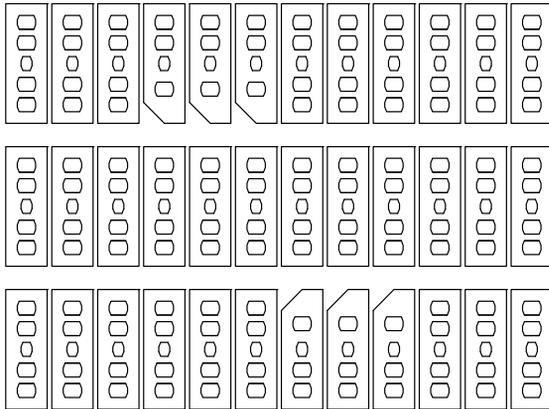

## Format

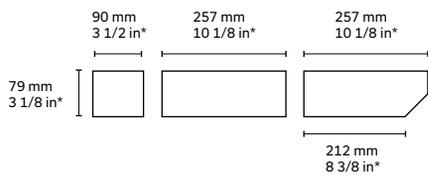

\* Actual dimensions. Allow a 3/8 in. - 10 mm mortar joint in order to obtain nominal dimensions.

## Technical information

Product	Standard	Compressive Strength	Density	Absorption	Dimension Tolerance	Fire Resistance (CNB)
<b>Melville Slik Brick</b>	CSA A165.2	20 MPa	> 2000 kg/m <sup>3</sup>	8 %	Thickness: ±2.0 mm Height: ±2.0 mm Length: ±2.0 mm	1,00 hour