

# Vendome® 60 and 80 Paver

60 mm - Not vehicular	Metric (mm)	Imperial (in.)
A	60 x 130 x 197	2 3/8 x 5 1/8 x 7 3/4
B	60 x 130 x 262	2 3/8 x 5 1/8 x 10 5/16
C	60 x 130 x 327	2 3/8 x 5 1/8 x 12 7/8
Weight/unit (avg.)	4 kg	9 lb
Unit/area (avg.)	30.50 units/m <sup>2</sup>	2.83 units/ft <sup>2</sup>
Area/layer	1.05 m <sup>2</sup>	11.28 ft <sup>2</sup>
Area/cube	8.40 m <sup>2</sup> 8 Rows	90.24 ft <sup>2</sup>
Length/row	7.86 lin. m	25.80 lin. ft
Length/cube	62.90 lin. m	206.40 lin. ft
Weight/cube	1044 kg	2302 lb

Code	Colour - Prestige
10554763	Rockland Black
10554761	Range Margaux Beige
Colour - Standard	
10554762	Range Newport Grey

Production location    Montreal


1 bag of Techniseal sand covers approx.: 44 ft<sup>2</sup>

80 mm	Metric (mm)	Imperial (in.)
A	80 x 130 x 197	3 1/8 x 5 1/8 x 7 3/4
B	80 x 130 x 262	3 1/8 x 5 1/8 x 10 5/16
C	80 x 130 x 327	3 1/8 x 5 1/8 x 12 7/8
Weight/unit (avg.)	5 kg	12 lb
Unit/area (avg.)	30.50 units/m <sup>2</sup>	2.83 units/ft <sup>2</sup>
Area/layer	1.05 m <sup>2</sup>	11.28 ft <sup>2</sup>
Area/cube	8.40 m <sup>2</sup> 8 Rows	90.24 ft <sup>2</sup>
Qty/cube	A = 88    B = 96    C = 72	
Length/row	7.86 lin. m	25.80 lin. ft
Length/cube	62.90 lin. m	206.40 lin. ft
Weight/cube	1382 kg	3047 lb


Code	Colour - Prestige
10550002	Rockland Black
10559011	Range Margaux Beige
Colour - Standard	
10559010	Range Newport Grey

Production location    Montreal

1 bag of Techniseal sand covers approx.: 33 ft<sup>2</sup>



## Laying Pattern

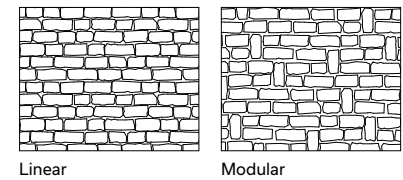

Linear

Modular



## Technical Information

Product	Vendome Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m <sup>2</sup> after 28 cycles 500 g/m <sup>2</sup> after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm
Runoff coefficient:	126 in. per hour



Joint sand compaction: Cover vibrating plate with a removable rubber tread (neoprene or polypropylene). Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material. Additional details: See our landscaping installation guide on our website (Permeable pavement section).