

	Metric (mm)	Imperial (in.)
A	70 x 180 x 360	2 3/4 x 7 x 14 1/8
B	70 x 360 x 360	2 3/4 x 14 1/8 x 14 1/8
C	70 x 360 x 540	2 3/4 x 14 1/8 x 21 1/4
Weight/unit	19 kg	43 lb
Area/layer	0.97 m ²	10.46 ft ²
Area/cube	9.72 m ² 10 Rows	104.6 ft ²
Length/row	3.24 lin. m	10.63 lin. ft
Length/cube	32.4 lin. m	106.3 lin. ft
Weight/cube	1551 kg	3421 lb

Code	Colour
10502891	Ash Grey Blend
10502278	Granite Blend
127003467	Fossil 

Production location Milton
Sold in full cubes


SMALL RECTANGLE	Metric (mm)	Imperial (in.)
	70 x 180 x 360	2 3/4 x 7 x 14 1/8
Weight/unit	10 kg	23 lb
Area/layer	0.97 m ²	10.46 ft ²
Area/cube	9.72 m ² 10 Rows	104.6 ft ²
Length/row	5.4 lin. m	17.7 lin. ft
Length/cube	54 lin. m	177.2 lin. ft
Weight/cube	1534 kg	3384 lb

Code	Colour
127000525	Sierra Black


Production location Milton
Sold in full cubes

1 bag of Techniseal sand covers approx.: 155 ft²

Typical Row




Laying Pattern

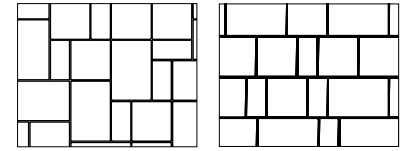


Modular - Eko

Linear - Eko

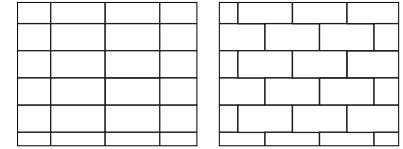


Checkerboard -
Eko Small Rectangle

Running Bond -
Eko Small Rectangle

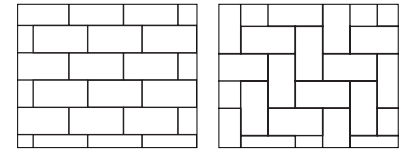

Offset 1/3 -
Eko Small Rectangle

Herringbone -
Eko Small Rectangle



Parquet -
Eko Small Rectangle



Technical Information

Product	Eko Paver
Standard	CSA A231.2
Flexural Strength	N/A
Compressive Strength	μ 50 MPa ≥ 45 MPa
De-icing salts freeze-thaw durability	225 g/m ² after 28 cycles 500 g/m ² after 49 cycles
Density	N/A
Absorption	N/A
Dimension Tolerance*	Length: -1.0 to +2.0 mm Width: -1.0 to +2.0 mm Height: ±3.0 mm

Cover snow removal tools with Teflon or neoprene protectors to minimize the risk of damage from scratches. Laying patterns are for design purposes only. Permacon shall not be responsible for excess or shortage of material.