

Keystone Wall

Compact Straight-Face	Metric (mm)	Imperial (in.)
	204 x 305 x 457	8 x 12 x 18
Weight/unit	45 kg	99 lb
Unit/area	10.80 units/m ²	1.00 unit/ft ²
Area/cube	3.70 m ²	40.00 ft ²
Qty/cube	40 units 5 Rows	40 units
Weight/cube	1832 kg	4039 lb




Code	Colour
129000505	Smoke Grey

Production location	Trois-Rivières
---------------------	----------------

Corner	Metric (mm)	Imperial (in.)
	204 x 230 x 450	8 x 9 x 18
Weight/unit	52 kg	114 lb
Unit/area	7.20 units/m ²	0.67 units/ft ²
Area/cube	2.79 m ²	30.00 ft ²
Qty/cube	20 units 2 Rows	20 units
Weight/cube	1044 kg	2296 lb

Code	Colour
16052390	Smoke Grey

Production location	Trois-Rivières
---------------------	----------------

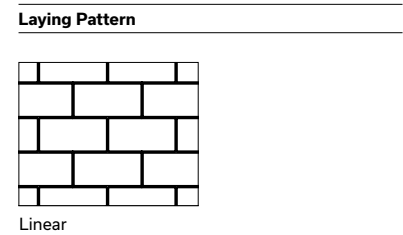

The information contained in these technical documents is supplied for information purposes only. Any application of the information is the sole responsibility of the installer. The installer must ensure that the installation and use of retaining wall projects comply with local regulations and code requirements. A qualified engineer must be consulted for final design for construction purposes. Oldcastle Building Products Canada, Inc. and its affiliates cannot be held responsible for the improper use of information contained in these technical documents.



Technical Information	
Product	Keystone Wall
Standard	ASTM C 1372
Flexural Strength	N/A
Compressive Strength	20.7 MPa
De-icing salts freeze-thaw durability	N/A
Density	2000 kg/m ²
Absorption	10.4%
Dimension Tolerance*	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm


For additional details see our landscaping installation guide on our website.

Keystone Capping

STRAIGHT FACE	Metric (mm)	Imperial (in.)
	102 x 267 x 432	4 x 10 1/2 x 17
Weight/unit	30 kg	64 lb
Unit/length	2.20 units/lin. m	0.67 unit/lin. ft
Area/cube	2.60 m ²	28.00 ft ²
Qty/cube	56 units 7 Rows	56 units
Weight/cube	1655 kg	3640 lb

Code	Colour
16054730	Smoke Grey

Production location	Trois-Rivières
---------------------	----------------



The information contained in these technical documents is supplied for information purposes only. Any application of the information is the sole responsibility of the installer. The installer must ensure that the installation and use of retaining wall projects comply with local regulations and code requirements. A qualified engineer must be consulted for final design for construction purposes. Oldcastle Building Products Canada, Inc. and its affiliates cannot be held responsible for the improper use of information contained in these technical documents.



Technical Information

Product	Keystone Capping
Standard	ASTM C 1372
Flexural Strength	N/A
Compressive Strength	20.7 MPa
De-icing salts freeze-thaw durability	N/A
Density	2000 kg/m ²
Absorption	10.4%
Dimension Tolerance*	Length: ±3.2 mm Width: ±3.2 mm Height: ±3.2 mm

For additional details see our landscaping installation guide on our website.